

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd  
 Phone +86 10-62547612  
 zhangyu@bjhengrui.cn  
 en.bjhengrui.com



## Nominal data

|                             |                    |      |      |      |      |
|-----------------------------|--------------------|------|------|------|------|
| Type                        | S4D400-AP12-37     |      |      |      |      |
| Motor                       | M4D074-EI          |      |      |      |      |
| Phase                       |                    | 3~   | 3~   | 3~   | 3~   |
| Nominal voltage             | VAC                | 230  | 230  | 400  | 400  |
| Wiring                      |                    | Δ    | Δ    | Y    | Y    |
| Frequency                   | Hz                 | 50   | 60   | 50   | 60   |
| Method of obtaining data    |                    | fa   | fa   | fa   | fa   |
| Valid for approval/standard |                    | CE   | CE   | CE   | CE   |
| Speed (rpm)                 | min <sup>-1</sup>  | 1450 | 1690 | 1450 | 1690 |
| Power consumption           | W                  | 135  | 185  | 135  | 185  |
| Current draw                | A                  | 0.76 | 0.68 | 0.44 | 0.39 |
| Max. back pressure          | Pa                 | 105  | 120  | 105  | 120  |
| Max. back pressure          | inH <sub>2</sub> O | 0.42 | 0.48 | 0.42 | 0.48 |
| Min. ambient temperature    | °C                 | -40  | -40  | -40  | -40  |
| Max. ambient temperature    | °C                 | 40   | 40   | 40   | 40   |
| Starting current            | A                  | 3.0  | 3.0  | 1.7  | 1.7  |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
 Subject to change

## Data according to ErP Directive

|                                   |   | Actual | Req. 2015 |                               |                   |      |
|-----------------------------------|---|--------|-----------|-------------------------------|-------------------|------|
| 01 Overall efficiency $\eta_{es}$ | % | 32.7   | 29.1      | 09 Power consumption $P_e$    | kW                | 0.19 |
| 02 Measurement category           |   | A      |           | 09 Air flow $q_v$             | m <sup>3</sup> /h | 2595 |
| 03 Efficiency category            |   | Static |           | 09 Pressure increase $p_{fs}$ | Pa                | 91   |
| 04 Efficiency grade N             |   | 43.6   | 40        | 10 Speed (rpm) n              | min <sup>-1</sup> | 1415 |
| 05 Variable speed drive           |   | No     |           | 11 Specific ratio*            |                   | 1.00 |

Data obtained at optimum efficiency level.  
 The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-27622



# AC axial fan

sickle-shaped blades (S series)  
with guard grille for short nozzle

## Technical description


|                                                                            |                                                                              |
|----------------------------------------------------------------------------|------------------------------------------------------------------------------|
| Weight                                                                     | 5.7 kg                                                                       |
| Fan size                                                                   | 400 mm                                                                       |
| Rotor surface                                                              | Painted black                                                                |
| Terminal box material                                                      | ABS plastic, black                                                           |
| Blade material                                                             | Sheet steel, painted black                                                   |
| Guard grille material                                                      | Steel, phosphated and coated with black plastic                              |
| Number of blades                                                           | 5                                                                            |
| Airflow direction                                                          | "V"                                                                          |
| Direction of rotation                                                      | Counterclockwise, viewed toward rotor                                        |
| Degree of protection                                                       | IP44; installation- and position-dependent as per EN 60034-5                 |
| Insulation class                                                           | "B"                                                                          |
| Moisture (F) / Environmental (H) protection class                          | H0+                                                                          |
| Max. permitted ambient temp. for motor (transport/storage)                 | + 70 °C                                                                      |
| Min. permitted ambient temp. for motor (transport/storage)                 | - 40 °C                                                                      |
| Installation position                                                      | Shaft horizontal or rotor on bottom; rotor on top on request                 |
| Condensation drainage holes                                                | On rotor side                                                                |
| Mode                                                                       | S1                                                                           |
| Motor bearing                                                              | Ball bearing with low-temperature lubricant                                  |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | < 0.75 mA                                                                    |
| Electrical hookup                                                          | Via terminal box                                                             |
| With cable                                                                 | Variable                                                                     |
| Protection class                                                           | I (with customer connection of protective earth)                             |
| Conformity with standards                                                  | EN 60335-1, motor does not have factory-installed overheating protection; CE |



# AC axial fan

sickle-shaped blades (S series)  
with guard grille for short nozzle

## Product drawing

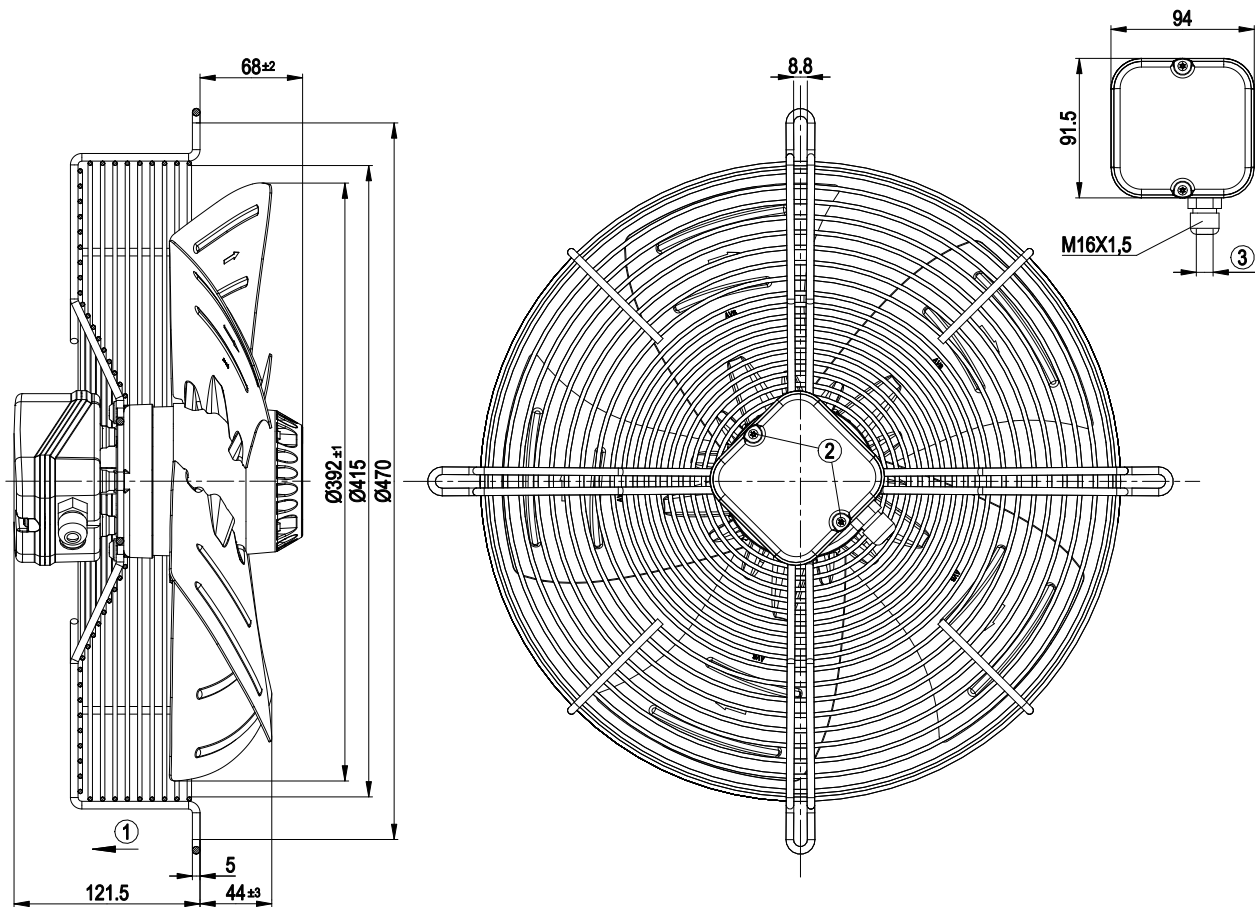


|   |                                                                |
|---|----------------------------------------------------------------|
| 1 | Direction of air flow "V"                                      |
| 2 | Tightening torque $0.5 \pm 0.1$ Nm                             |
| 3 | Cable diameter max. 7.5 mm, tightening torque $1.3 \pm 0.2$ Nm |

# AC axial fan

sickle-shaped blades (S series)  
with guard grille for short nozzle

## Connection diagram

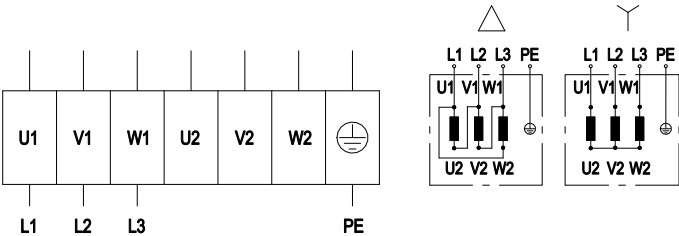


|    |                   |    |                 |    |                  |
|----|-------------------|----|-----------------|----|------------------|
|    | Three-phase motor | Y  | Star connection | Δ  | Delta connection |
| L1 | = U1 = blue       | L2 | = V1 = black    | L3 | = W1 = brown     |
| U2 | = white           | V2 | = green         | W2 | = yellow         |
| PE | PE (green/yellow) |    |                 |    |                  |



# AC axial fan

sickle-shaped blades (S series)  
with guard grille for short nozzle

## Curves: Air performance 50 Hz

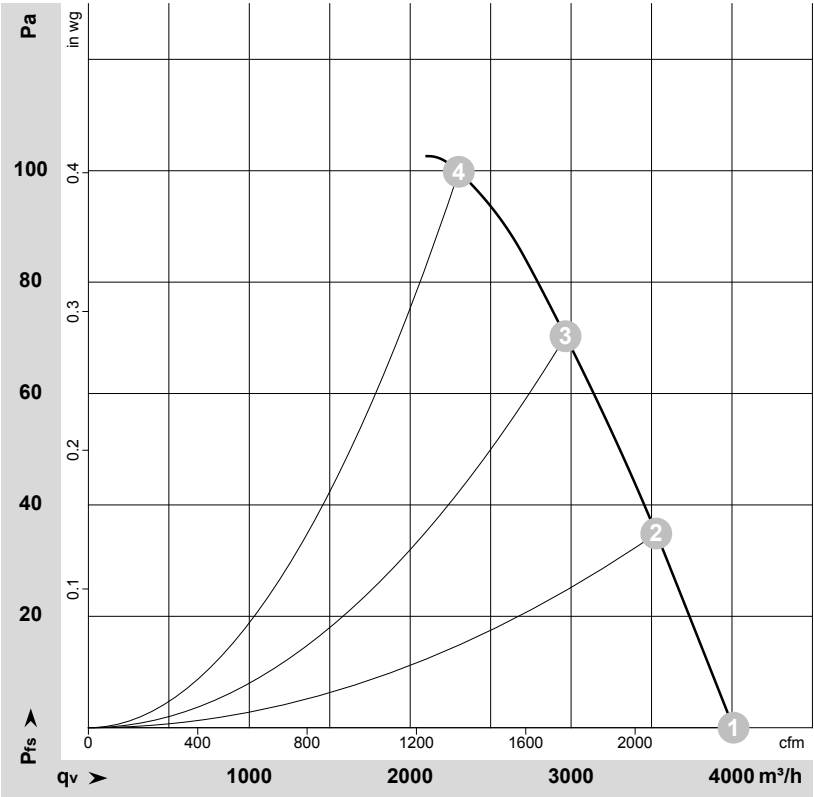

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-27622-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | Wired | U   | f  | n                 | P <sub>e</sub> | I    | qv   | p <sub>fs</sub> | qv   | p <sub>fs</sub> |
|---|-------|-----|----|-------------------|----------------|------|------|-----------------|------|-----------------|
|   |       | V   | Hz | min <sup>-1</sup> | W              | A    | m³/h | Pa              | CFM  | inH2O           |
| 1 | Y     | 400 | 50 | 1450              | 135            | 0.44 | 4010 | 0               | 2360 | 0.00            |
| 2 | Y     | 400 | 50 | 1435              | 161            | 0.47 | 3530 | 35              | 2080 | 0.14            |
| 3 | Y     | 400 | 50 | 1420              | 183            | 0.49 | 2965 | 70              | 1745 | 0.28            |
| 4 | Y     | 400 | 50 | 1410              | 204            | 0.50 | 2300 | 100             | 1355 | 0.40            |


Wired = Wiring · U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · qv = Air flow · p<sub>fs</sub> = Pressure increase



# AC axial fan

sickle-shaped blades (S series)  
with guard grille for short nozzle

## Curves: Air performance 60 Hz

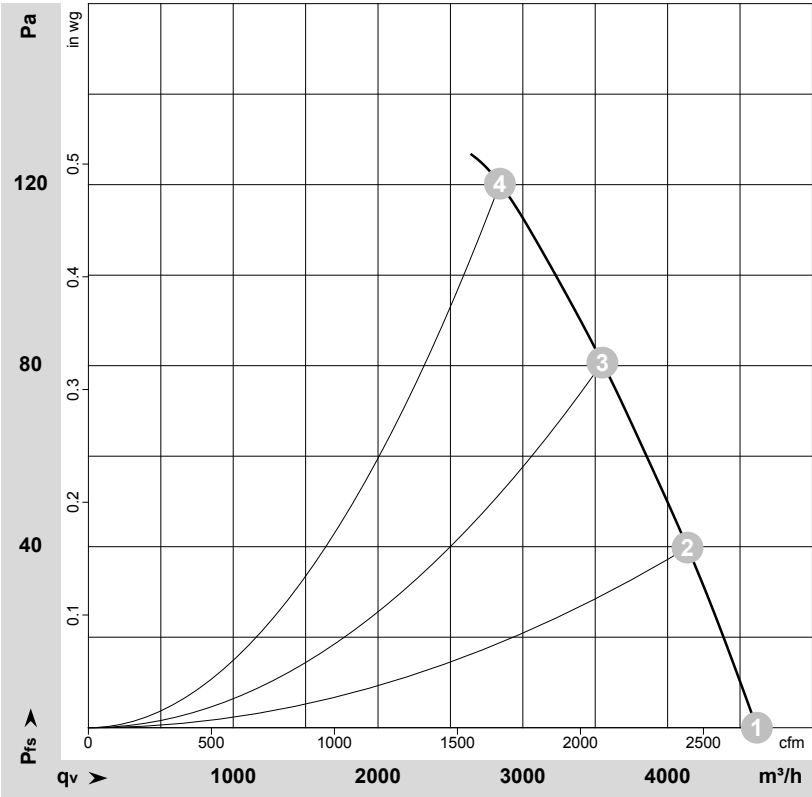

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-27623-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | Wired | U   | f  | n                 | P <sub>e</sub> | I    | qv                | p <sub>fs</sub> | qv   | p <sub>fs</sub>    |
|---|-------|-----|----|-------------------|----------------|------|-------------------|-----------------|------|--------------------|
|   |       | V   | Hz | min <sup>-1</sup> | W              | A    | m <sup>3</sup> /h | Pa              | CFM  | inH <sub>2</sub> O |
| 1 | Y     | 400 | 60 | 1690              | 185            | 0.39 | 4615              | 0               | 2715 | 0.00               |
| 2 | Y     | 400 | 60 | 1660              | 223            | 0.45 | 4140              | 40              | 2435 | 0.16               |
| 3 | Y     | 400 | 60 | 1635              | 257            | 0.49 | 3550              | 80              | 2090 | 0.32               |
| 4 | Y     | 400 | 60 | 1605              | 292            | 0.54 | 2840              | 120             | 1675 | 0.48               |

Wired = Wiring · U = Power supply · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · qv = Air flow · p<sub>fs</sub> = Pressure increase

