

# AC axial fan - HyBlade

sickle-shaped blades (S series), single-intake  
with square full nozzle

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd  
Phone +86 10-62547612  
zhangyu@bjhengrui.cn  
en.bjhengrui.com

## Nominal data

|                             |                   |          |          |      |      |
|-----------------------------|-------------------|----------|----------|------|------|
| Type                        | W4D630-GF03-03    |          |          |      |      |
| Motor                       | M4D138-LA         |          |          |      |      |
| Phase                       |                   | 3~       | 3~       | 3~   | 3~   |
| Nominal voltage             | VAC               | 230      | 277      | 400  | 480  |
| Wiring                      |                   | $\Delta$ | $\Delta$ | Y    | Y    |
| Frequency                   | Hz                | 50       | 60       | 50   | 60   |
| Method of obtaining data    |                   | ml       | ml       | ml   | ml   |
| Valid for approval/standard |                   | CE       | CE       | CE   | CE   |
| Speed (rpm)                 | min <sup>-1</sup> | 1405     | 1660     | 1405 | 1660 |
| Power consumption           | W                 | 1720     | 2860     | 1720 | 2860 |
| Current draw                | A                 | 6.67     | 8.18     | 3.86 | 4.73 |
| Max. back pressure          | Pa                | 220      | 310      | 220  | 310  |
| Max. back pressure          | in. wg            | 0.88     | 1.24     | 0.88 | 1.24 |
| Min. ambient temperature    | °C                | -40      | -40      | -40  | -40  |
| Max. ambient temperature    | °C                | 65       | 60       | 65   | 60   |
| Starting current            | A                 | 27       |          | 27   |      |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011

|                                   |   | Actual | Req. 2015 |
|-----------------------------------|---|--------|-----------|
| 01 Overall efficiency $\eta_{es}$ | % | 35.4   | 35.2      |
| 02 Measurement category           |   | A      |           |
| 03 Efficiency category            |   | Static |           |
| 04 Efficiency grade N             |   | 40.2   | 40        |
| 05 Variable speed drive           |   | No     |           |

Data obtained at optimum efficiency level.  
The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

|                               |                   |       |
|-------------------------------|-------------------|-------|
| 09 Power consumption $P_e$    | kW                | 1.73  |
| 09 Air flow $q_v$             | m <sup>3</sup> /h | 10845 |
| 09 Pressure increase $p_{fs}$ | Pa                | 205   |
| 10 Speed (rpm) n              | min <sup>-1</sup> | 1405  |
| 11 Specific ratio*            |                   | 1.00  |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$

LU-201248



# AC axial fan - HyBlade

sickle-shaped blades (S series), single-intake  
with square full nozzle

## Technical description


|                                                                            |                                                                                                                                                                                                                                                      |
|----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Weight                                                                     | 38.9 kg                                                                                                                                                                                                                                              |
| Size                                                                       | 630 mm                                                                                                                                                                                                                                               |
| Motor size                                                                 | 138                                                                                                                                                                                                                                                  |
| Rotor surface                                                              | Cast in aluminum                                                                                                                                                                                                                                     |
| Terminal box material                                                      | PP plastic                                                                                                                                                                                                                                           |
| Blade material                                                             | Sheet aluminum insert, sprayed with PP plastic                                                                                                                                                                                                       |
| Fan housing material                                                       | Sheet steel, galvanized and coated with black plastic (RAL 9005)                                                                                                                                                                                     |
| Guard grille material                                                      | Steel, coated with black plastic (RAL 9005)                                                                                                                                                                                                          |
| Number of blades                                                           | 5                                                                                                                                                                                                                                                    |
| Blade pitch                                                                | -10°                                                                                                                                                                                                                                                 |
| Airflow direction                                                          | V                                                                                                                                                                                                                                                    |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                                                                                                                                                                                                                       |
| Degree of protection                                                       | IP54                                                                                                                                                                                                                                                 |
| Insulation class                                                           | "F"                                                                                                                                                                                                                                                  |
| Moisture (F) / Environmental (H) protection class                          | H2                                                                                                                                                                                                                                                   |
| Ambient temperature note                                                   | Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings. |
| Max. permitted ambient temp. for motor (transport/storage)                 | +80 °C                                                                                                                                                                                                                                               |
| Min. permitted ambient temp. for motor (transport/storage)                 | -40 °C                                                                                                                                                                                                                                               |
| Installation position                                                      | Any                                                                                                                                                                                                                                                  |
| Condensation drainage holes                                                | On rotor and stator sides                                                                                                                                                                                                                            |
| Mode                                                                       | S1                                                                                                                                                                                                                                                   |
| Motor bearing                                                              | Ball bearing                                                                                                                                                                                                                                         |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | ≤ 3.5 mA                                                                                                                                                                                                                                             |
| Electrical hookup                                                          | Terminal box                                                                                                                                                                                                                                         |
| Motor protection                                                           | Thermal overload protector (TOP) with basic insulation                                                                                                                                                                                               |
| With cable                                                                 | Axial                                                                                                                                                                                                                                                |
| Protection class                                                           | I (with customer connection of protective earth)                                                                                                                                                                                                     |
| Conformity with standards                                                  | EN 60034-1 (2010); CE                                                                                                                                                                                                                                |
| Approval                                                                   | CSA C22.2 No. 100; EAC; UL 1004-1                                                                                                                                                                                                                    |



# AC axial fan - HyBlade

sickle-shaped blades (S series), single-intake  
with square full nozzle

## Product drawing

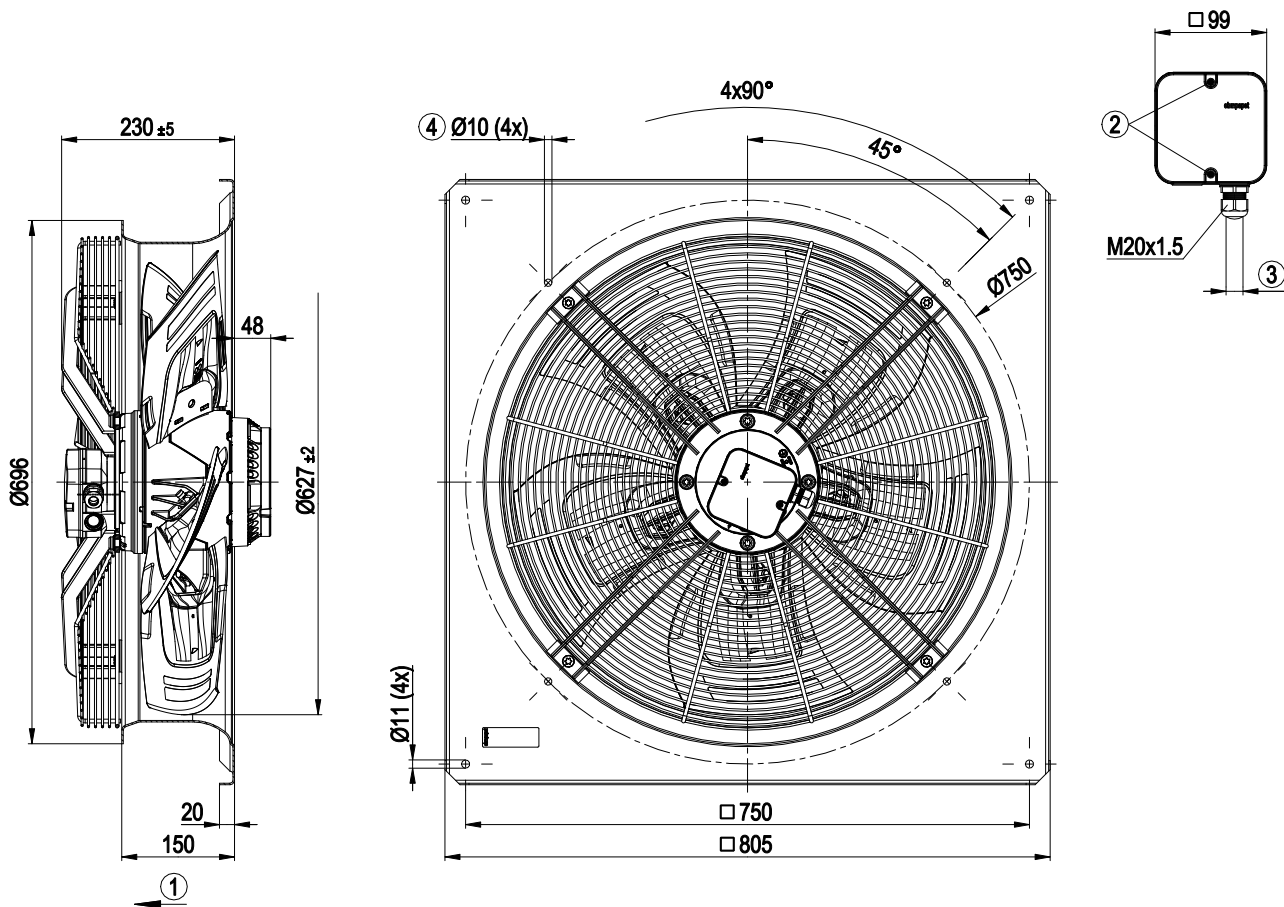


|   |                                                                        |
|---|------------------------------------------------------------------------|
| 1 | Direction of air flow "V"                                              |
| 2 | Tightening torque $1.5 \pm 0.2$ Nm                                     |
| 3 | Cable diameter min. 7 mm, max. 14 mm, tightening torque $2 \pm 0.3$ Nm |
| 4 | Mounting holes for FlowGrid                                            |

# AC axial fan - HyBlade

sickle-shaped blades (S series), single-intake  
with square full nozzle

## Connection diagram

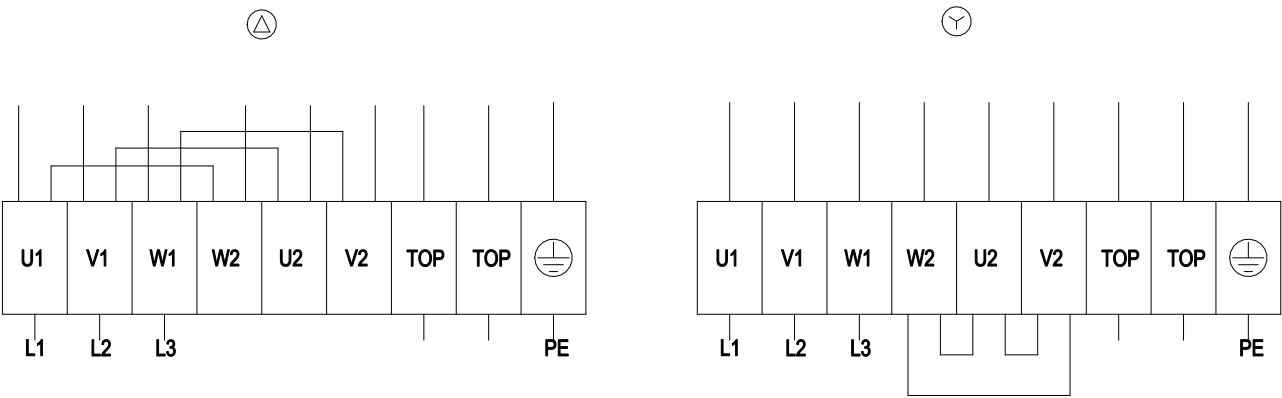


|    |                  |    |                 |     |              |
|----|------------------|----|-----------------|-----|--------------|
| Δ  | Delta connection | Y  | Star connection | L1  | = U1 = black |
| L2 | = V1 = blue      | L3 | = W1 = brown    | W2  | yellow       |
| U2 | green            | V2 | white           | TOP | 2x gray      |
| PE | green/yellow     |    |                 |     |              |



# AC axial fan - HyBlade

sickle-shaped blades (S series), single-intake  
with square full nozzle

## Curves: Air performance 50 Hz

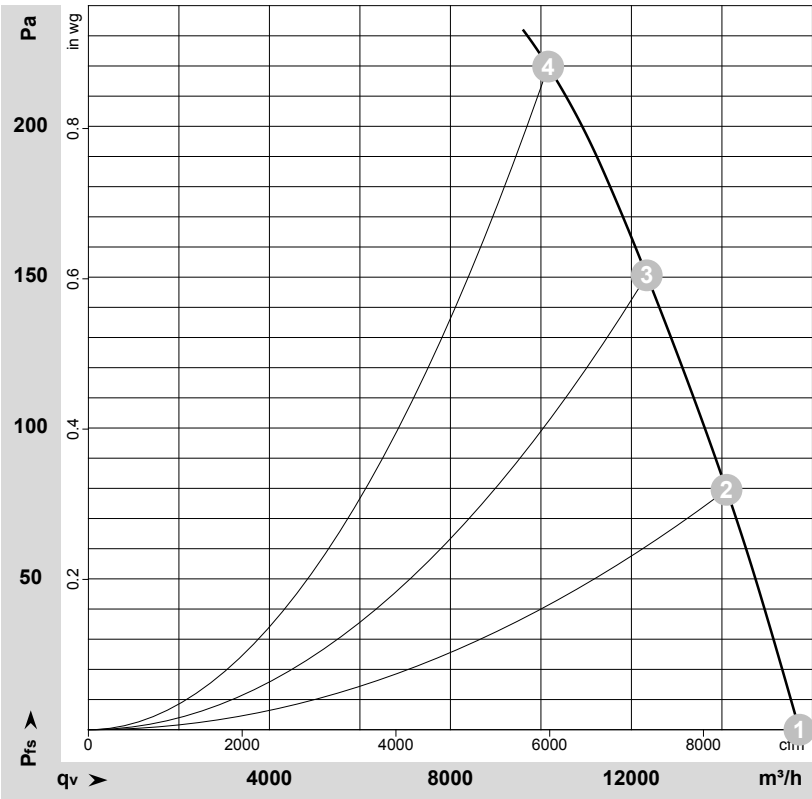

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-121453-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

|   | Wired | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | q <sub>v</sub>    | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|---|-------|-----|----|-------------------|----------------|------|-------------------|-------------------|--------------------|-------------------|-----------------|----------------|-----------------|
|   |       | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | dB(A)              | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1 | Y     | 400 | 50 | 1445              | 1147           | 3.33 | 71                | 78                | 78                 | 15715             | 0               | 9250           | 0.00            |
| 2 | Y     | 400 | 50 | 1430              | 1367           | 3.50 | 69                | 76                | 76                 | 14100             | 80              | 8300           | 0.32            |
| 3 | Y     | 400 | 50 | 1405              | 1720           | 3.86 | 72                | 78                | 78                 | 12340             | 150             | 7260           | 0.60            |
| 4 | Y     | 400 | 50 | 1405              | 1720           | 3.86 | 75                | 82                | 82                 | 10160             | 220             | 5980           | 0.88            |


Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase



AC axial fan - HyBlade

sickle-shaped blades (S series), single-intake  
with square full nozzle

Curves: Air performance 60 Hz

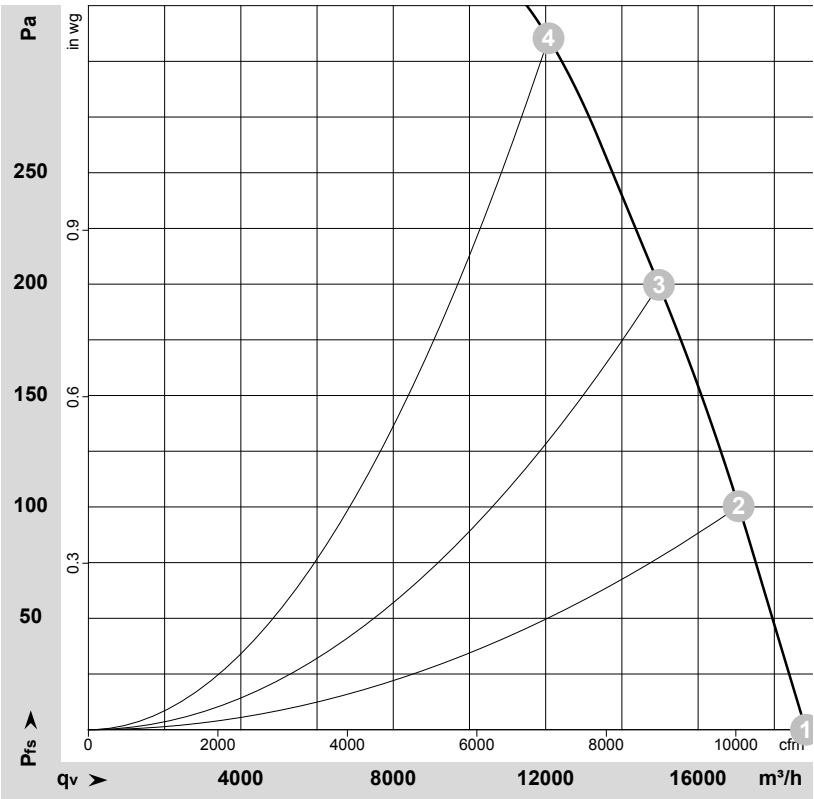

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-121467-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

|   | Wired | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | q <sub>v</sub>    | p <sub>fs</sub> | q <sub>v</sub> | p <sub>fs</sub> |
|---|-------|-----|----|-------------------|----------------|------|-------------------|-------------------|--------------------|-------------------|-----------------|----------------|-----------------|
|   |       | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | dB(A)              | m <sup>3</sup> /h | Pa              | cfm            | in. wg          |
| 1 | Y     | 480 | 60 | 1715              | 1884           | 3.71 | 75                | 82                | 82                 | 18830             | 0               | 11085          | 0.00            |
| 2 | Y     | 480 | 60 | 1700              | 2224           | 4.03 | 73                | 80                | 80                 | 17065             | 100             | 10045          | 0.40            |
| 3 | Y     | 480 | 60 | 1680              | 2552           | 4.36 | 75                | 82                | 82                 | 14975             | 200             | 8815           | 0.80            |
| 4 | Y     | 480 | 60 | 1660              | 2860           | 4.73 | 80                | 87                | 86                 | 12075             | 310             | 7105           | 1.24            |

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

