

AC axial fan with full round nozzle

straight blades (A series)



Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd
 Phone +86 10-62547612
 zhangyu@bjhengrui.cn
 en.bjhengrui.com

Nominal data

Type	W4E350-CA06-01			
Motor	M4E068-EC			
Phase		1~	1~	1~
Nominal voltage	[V]	230	230	230
Frequency	[Hz]	50	60	60
Type of data definition		rfa	rfa	rfa
Valid for approval / standard		CE	CE	UL
Speed	[min ⁻¹]	1390	1550	1550
Power input	[W]	140	195	205
Current draw	[A]	0,62	0.86	0.9
Motor capacitor	[μF]	5	5	5
Capacitor voltage	[VDB]	400	400	400
Capacitor standard		P0 (CE)	P0 (CE)	UL
Max. back pressure	[Pa]	120	90	90
Max. ambient temperature	[°C]	50	30	30
Air flow	[m ³ /h]	2850	3190	3190
Back pressure	[Pa]	0	0	0
Sound pressure level	[dB(A)]	68	70	70

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit
 Subject to alterations


AC axial fan

with full round nozzle
straight blades (A series)


Technical features

Size	350 mm
Operation mode	Continuous operation (S1)
Direction of rotation	Counter-clockwise, seen on rotor
Direction of air flow	"V"
Insulation class	"B"
Cable exit	Lateral
Bearing motor	Ball bearing
Mass	3.1 kg
Material of impeller	Sheet steel, coated in black
Motor protection	Thermal overload protector (TOP) wired internally
Product conforming to standard	CE
Number of blades	5
Type of protection	IP 44 - depending on position
Protection class	I
Approval	CCC


Product drawing

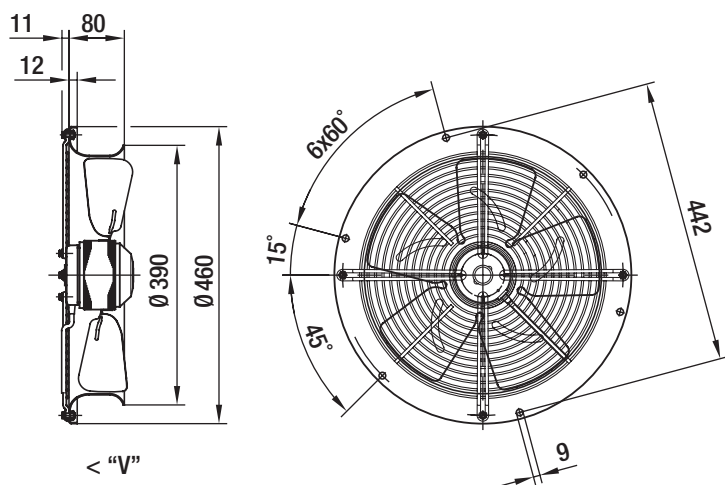

Connection screen

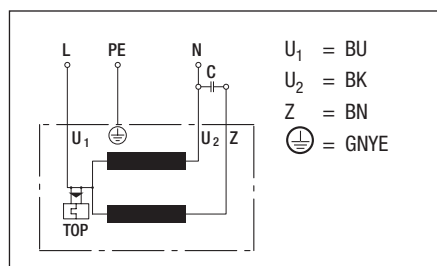

Charts: Air flow 50 Hz

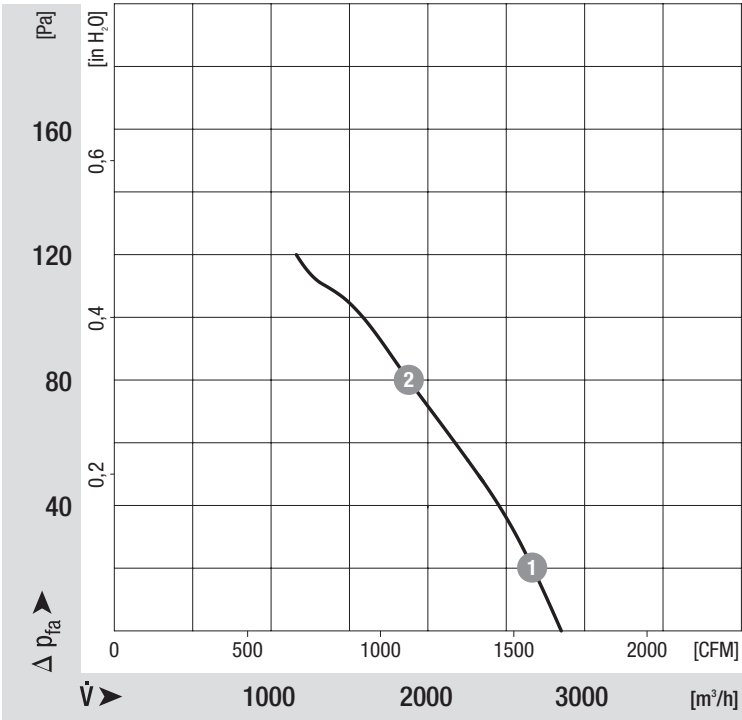

Measured values

	n	P ₁	I
	[min ⁻¹]	[W]	[A]
1	1375	147	0.65
2	1345	161	0.71

AC axial fan with full round nozzle
straight blades (A series)

Charts: Air flow 60 Hz

