

50x50x15 mm


10.2~18.6 CFM




# ■ Specifications

|  | Bearing | Rating Voltage | Power Current | Power Consumption | Speed | Air Flow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|----------------|---------------|-------------------|-------|----------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)          | (mA)          | (WATTS)           | (RPM) | (CFM)    | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| MF50151VX-1000U-A99                                                               | ●       | 12             | 110           | 1.32              | 7200  | 18.6     | 0.31                    | 38.1    | 33.0   | 1     |
| MF50151V1-1000U-A99                                                               | ●       | 12             | 72            | 0.87              | 6100  | 17.0     | 0.23                    | 33.0    | 33.0   | 2     |
| MF50151V2-1000U-A99                                                               | ●       | 12             | 45            | 0.54              | 5000  | 13.0     | 0.17                    | 29.0    | 33.0   | 3     |
| MF50151V3-1000U-A99                                                               | ●       | 12             | 35            | 0.42              | 3800  | 10.2     | 0.12                    | 20.1    | 33.0   | 4     |
| MF50152VX-1000U-A99                                                               | ●       | 24             | 55            | 1.32              | 7200  | 18.6     | 0.31                    | 38.1    | 33.0   | 1     |
| MF50152V1-1000U-A99                                                               | ●       | 24             | 42            | 1.01              | 6100  | 17.0     | 0.23                    | 33.0    | 33.0   | 2     |
| MF50152V2-1000U-A99                                                               | ●       | 24             | 27            | 0.65              | 5000  | 13.0     | 0.17                    | 29.0    | 33.0   | 3     |

## ■ Air Flow-Static Pressure Characteristics

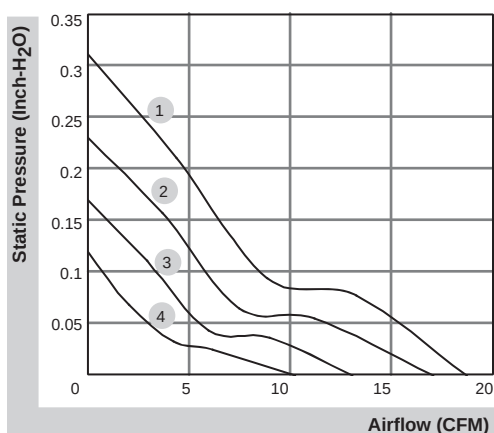

## ■ External dimensions(mm)

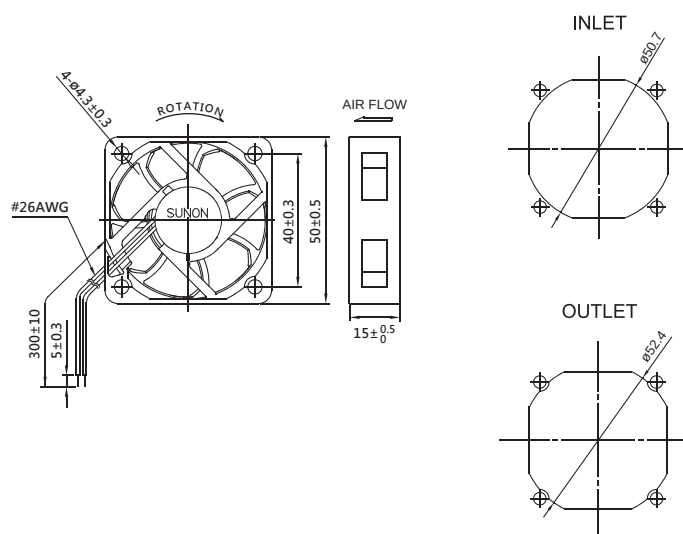

\*All model could be customized. Please contact with Sunon Sales

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd  
+86 10-62547612  
zhangyu@bjhengrui.cn  
en.bjhengrui.com

50x50x15 mm


7.7 CFM




■ Specifications

|  | Bearing | Rating Voltage | Power Current | Power Consumption | Speed | Air Flow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|----------------|---------------|-------------------|-------|----------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)          | (mA)          | (WATTS)           | (RPM) | (CFM)    | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| HA50151V4-1000U-A99                                                               | ●       | 12             | 25            | 0.30              | 3200  | 7.7      | 0.07                    | 15.4    | 33.0   | 1     |

■ Air Flow-Static Pressure Characteristics

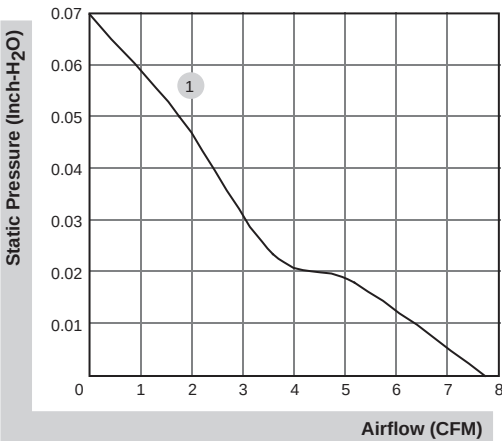

■ External dimensions(mm)

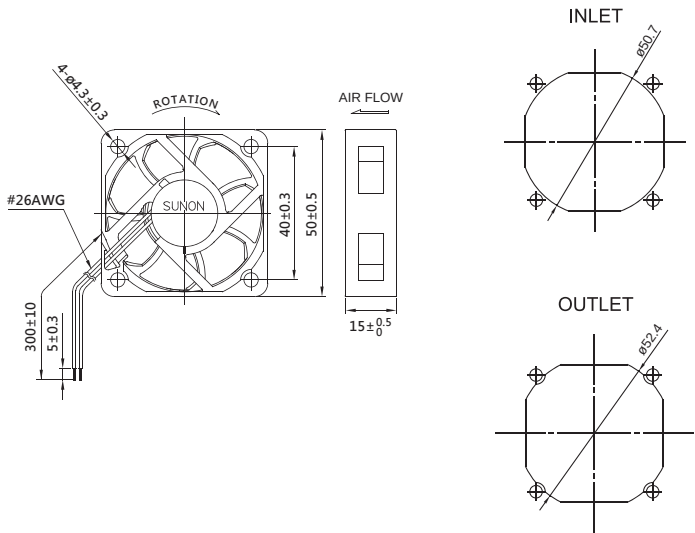

\*All model could be customized. Please contact with Sunon Sales

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd  
+86 10-62547612  
zhangyu@bjhengrui.cn  
en.bjhengrui.com

60x60x10 mm


12.2~16.3 CFM




### ■ Specifications

|  | Bearing | Rating Voltage | Power Current | Power Consumption | Speed | Air Flow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|----------------|---------------|-------------------|-------|----------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)          | (mA)          | (WATTS)           | (RPM) | (CFM)    | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| MF60101V1-1000U-A99                                                               | ●       | 12             | 108           | 1.30              | 4000  | 16.3     | 0.12                    | 28.5    | 23.0   | 1     |
| MF60101V2-1000U-A99                                                               | ●       | 12             | 75            | 0.90              | 3500  | 14.3     | 0.10                    | 25.0    | 23.0   | 2     |
| MF60101V3-1000U-A99                                                               | ●       | 12             | 46            | 0.56              | 3000  | 12.2     | 0.08                    | 20.5    | 23.0   | 3     |

### ■ Air Flow-Static Pressure Characteristics

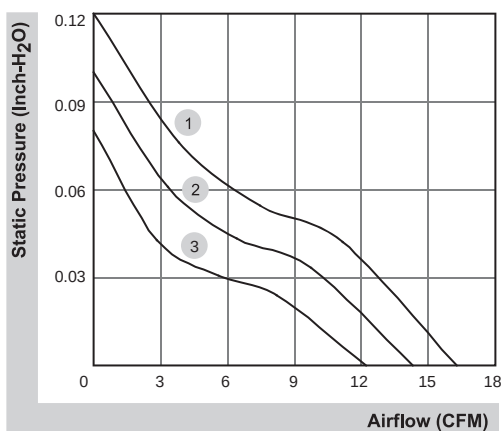

### ■ External dimensions(mm)

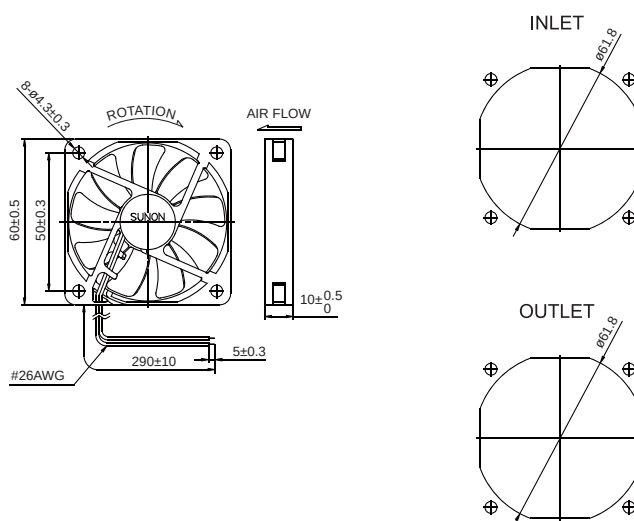

\*All model could be customized. Please contact with Sunon Sales

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd  
+86 10-62547612  
zhangyu@bjhengrui.cn  
en.bjhengrui.com