

60x60x25 mm


29.0~40.0 CFM




# ■ Specifications

| Model              | Bearing      | Rating Voltage | Power Current | Power Consumption | Speed | Air Flow | Static Pressure         | Noise   | Weight | Curve |
|--------------------|--------------|----------------|---------------|-------------------|-------|----------|-------------------------|---------|--------|-------|
|                    | 2BALL Sleeve | (VDC)          | (mA)          | (WATTS)           | (RPM) | (CFM)    | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| PE60251BX-000U-A99 | ☼            | 12             | 370           | 4.44              | 7600  | 40.0     | 0.64                    | 46.0    | 71.0   | 1     |
| PE60251B1-000U-A99 | ☼            | 12             | 297           | 3.57              | 6900  | 36.0     | 0.54                    | 44.0    | 71.0   | 2     |
| PE60251B2-000U-A99 | ☼            | 12             | 232           | 2.79              | 6100  | 31.5     | 0.42                    | 42.0    | 71.0   | 3     |
| PE60251B3-000U-A99 | ☼            | 12             | 197           | 2.37              | 5600  | 29.0     | 0.36                    | 38.0    | 71.0   | 4     |
| PE60252BX-000U-A99 | ☼            | 24             | 190           | 4.56              | 7600  | 40.0     | 0.64                    | 46.0    | 75.0   | 1     |
| PE60252B1-000U-A99 | ☼            | 24             | 155           | 3.72              | 6900  | 36.0     | 0.54                    | 44.0    | 75.0   | 2     |
| PE60252B2-000U-A99 | ☼            | 24             | 121           | 2.91              | 6100  | 31.5     | 0.42                    | 42.0    | 75.0   | 3     |
| PE60252B3-000U-A99 | ☼            | 24             | 104           | 2.50              | 5600  | 29.0     | 0.36                    | 38.0    | 75.0   | 4     |

## ■ Air Flow-Static Pressure Characteristics

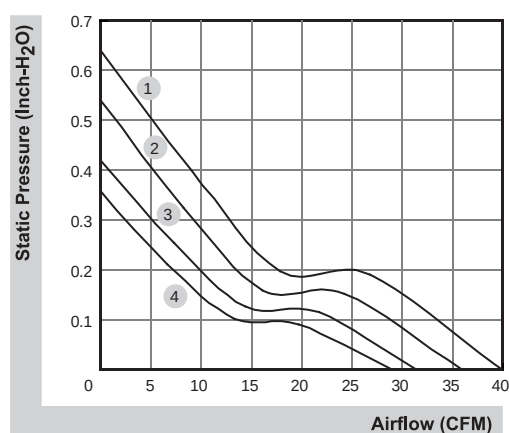

## ■ External dimensions(mm)

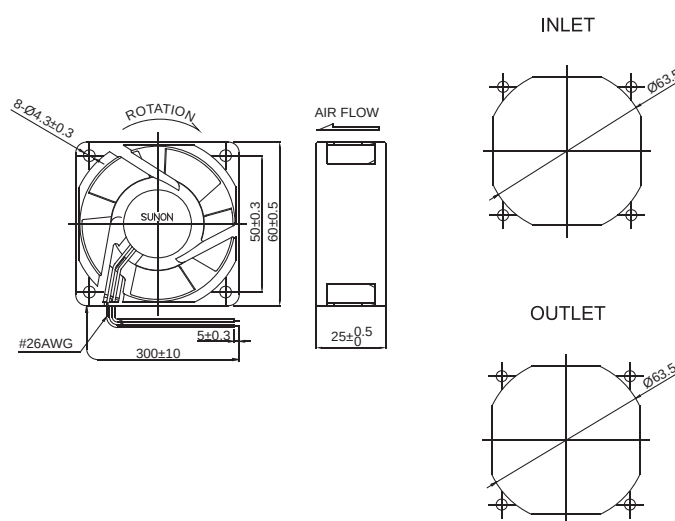

\*All model could be customized. Please contact with Sunon Sales

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd  
+86 10-62547612  
zhangyu@bjhengrui.cn  
en.bjhengrui.com

60x60x25 mm


16.0~27.0 CFM




### Specifications

|  | Bearing | Rating Voltage | Power Current | Power Consumption | Speed | Air Flow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|----------------|---------------|-------------------|-------|----------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)          | (mA)          | (WATTS)           | (RPM) | (CFM)    | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| MF60251VX-1000U-A99                                                               | ●       | 12             | 130           | 1.56              | 5200  | 27.0     | 0.31                    | 31.2    | 45.0   | 1     |
| MF60251V1-1000U-A99                                                               | ●       | 12             | 75            | 0.90              | 4500  | 23.5     | 0.21                    | 27.0    | 45.0   | 2     |
| MF60251V2-1000U-A99                                                               | ●       | 12             | 72            | 0.87              | 3800  | 19.3     | 0.15                    | 22.0    | 45.0   | 3     |
| MF60251V3-1000U-A99                                                               | ●       | 12             | 44            | 0.53              | 3100  | 16.0     | 0.10                    | 16.7    | 45.0   | 4     |
| MF60252VX-1000U-A99                                                               | ●       | 24             | 80            | 1.92              | 5200  | 27.0     | 0.31                    | 31.2    | 45.0   | 1     |
| MF60252V1-1000U-A99                                                               | ●       | 24             | 50            | 1.20              | 4500  | 23.5     | 0.21                    | 27.0    | 45.0   | 2     |
| MF60252V2-1000U-A99                                                               | ●       | 24             | 30            | 0.72              | 3800  | 19.3     | 0.15                    | 22.0    | 45.0   | 3     |
| MF60252V3-1000U-A99                                                               | ●       | 24             | 22            | 0.53              | 3100  | 16.0     | 0.10                    | 16.7    | 45.0   | 4     |

### Air Flow-Static Pressure Characteristics

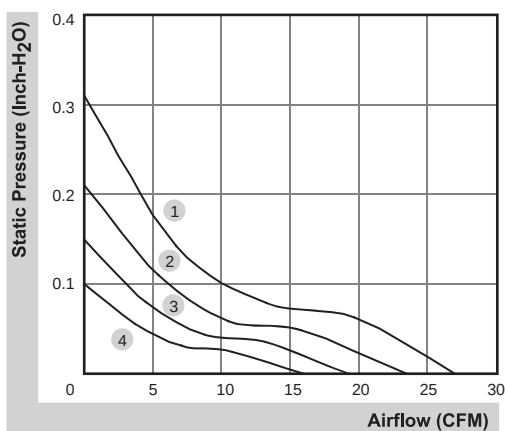

### External dimensions(mm)

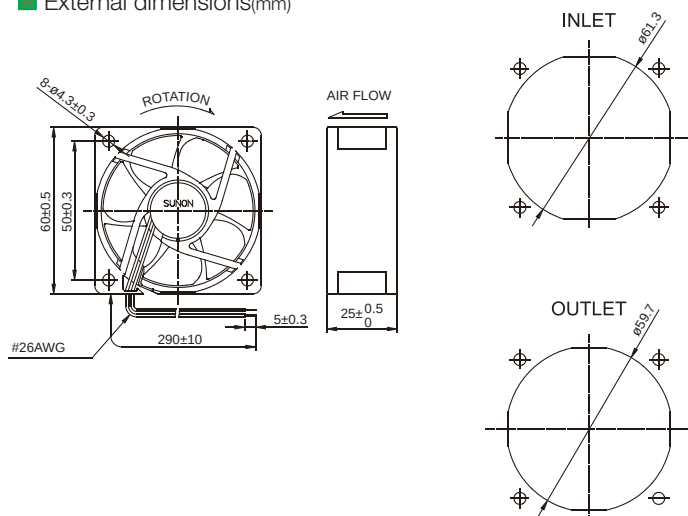

\*All model could be customized. Please contact with Sunon Sales

Beijing Hengrui Mechanical and Electrical Equipment Co., Ltd  
+86 10-62547612  
zhangyu@bjhengrui.cn  
en.bjhengrui.com

60x60x25 mm


16.0~23.5 CFM




### ■ Specifications

| Model              | Bearing      | Rating Voltage | Power Current | Power Consumption | Speed | Air Flow | Static Pressure         | Noise   | Weight | Curve |
|--------------------|--------------|----------------|---------------|-------------------|-------|----------|-------------------------|---------|--------|-------|
|                    | 2BALL Sleeve | (VDC)          | (mA)          | (WATTS)           | (RPM) | (CFM)    | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| EB60251S1-000U-999 | ○            | 12             | 135           | 1.62              | 4500  | 23.5     | 0.21                    | 33.5    | 57.0   | 1     |
| EB60251S2-000U-999 | ○            | 12             | 89            | 1.07              | 3800  | 19.3     | 0.15                    | 29.0    | 57.0   | 2     |
| EB60251S3-000U-999 | ○            | 12             | 64            | 0.77              | 3100  | 16.0     | 0.10                    | 21.0    | 57.0   | 3     |
| EB60252S1-000U-999 | ○            | 24             | 75            | 1.80              | 4500  | 23.5     | 0.21                    | 33.5    | 57.0   | 1     |
| EB60252S2-000U-999 | ○            | 24             | 48            | 1.16              | 3800  | 19.3     | 0.15                    | 29.0    | 57.0   | 2     |
| EB60252S3-000U-999 | ○            | 24             | 35            | 0.84              | 3100  | 16.0     | 0.10                    | 21.0    | 57.0   | 3     |

### ■ Air Flow-Static Pressure Characteristics

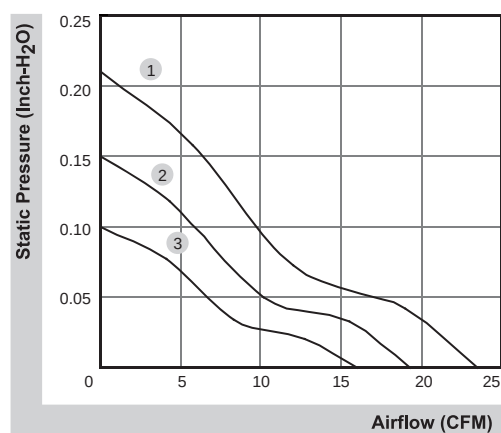

### ■ External dimensions(mm)

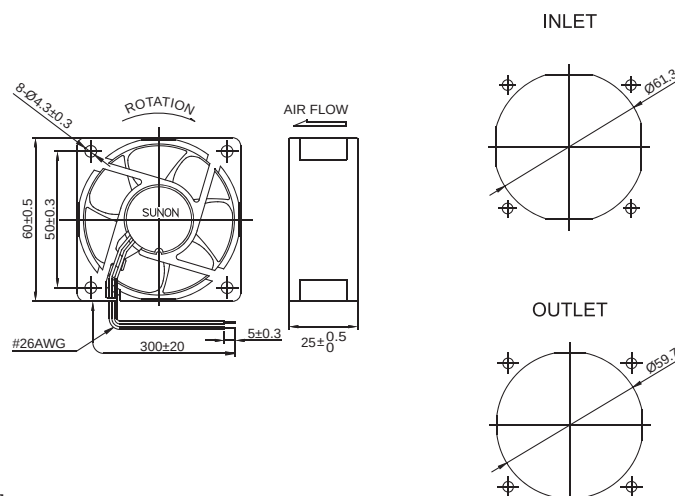

\*All model could be customized. Please contact with Sunon Sales

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd  
+86 10-62547612  
zhangyu@bjhengrui.cn  
en.bjhengrui.com