

40x40x28 mm

12.8~31.3 CFM




#### ■ Specification


| Model               | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|---------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                     | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| PF40281BX-10000-A9H | ☉            | 12            | 950           | 11.4              | 22000 | 31.3    | 3.12                    | 62.0    | 42.0   | 1     |
| PF40281B1-10000-A9H | ☉            | 12            | 510           | 6.12              | 17600 | 24.9    | 2.05                    | 56.0    | 42.0   | 2     |
| PF40281B2-10000-A9H | ☉            | 12            | 220           | 2.64              | 13000 | 18.0    | 1.16                    | 48.7    | 42.0   | 3     |
| PF40281B3-10000-A9H | ☉            | 12            | 145           | 1.74              | 11000 | 15.4    | 0.78                    | 43.9    | 42.0   | 4     |
| PF40281B4-10000-A9H | ☉            | 12            | 96            | 1.16              | 9200  | 12.8    | 0.60                    | 39.9    | 42.0   | 5     |

■ Function R Type : F9H / F Type : G9H / PWM : H9H, Q9H, S9H

#### ■ Air Flow-Static Pressure Characteristics

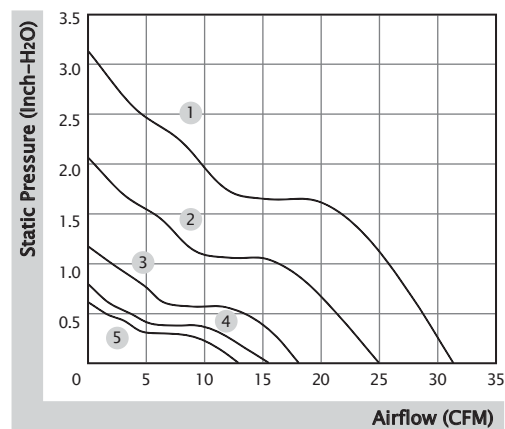

#### ■ External Dimensions(mm)

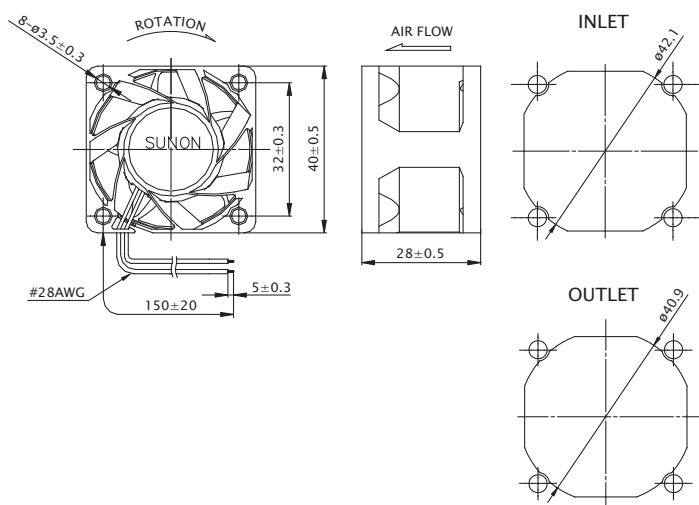

# 40x40x28 mm (IP68 / GR487)

14.1~23.9 CFM




■ Specification


| Model               | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|---------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                     | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| GF40282BX-10000-AEP | ☼            | 24            | 400           | 9.60              | 17600 | 23.9    | 2.01                    | 58.5    | 46.0   | 1     |
| GF40282B1-10000-AEP | ☼            | 24            | 230           | 5.52              | 14600 | 19.6    | 1.38                    | 52.8    | 46.0   | 2     |
| GF40282B2-10000-AEP | ☼            | 24            | 180           | 4.32              | 13100 | 17.7    | 1.11                    | 50.0    | 46.0   | 3     |
| GF40282B3-10000-AEP | ☼            | 24            | 117           | 2.81              | 10500 | 14.1    | 0.71                    | 45.0    | 46.0   | 4     |
| GF40282BX-10000-ADP | ☼            | 24            | 400           | 9.60              | 17600 | 23.9    | 2.01                    | 58.5    | 46.0   | 1     |
| GF40282B1-10000-ADP | ☼            | 24            | 230           | 5.52              | 14600 | 19.6    | 1.38                    | 52.8    | 46.0   | 2     |
| GF40282B2-10000-ADP | ☼            | 24            | 180           | 4.32              | 13100 | 17.7    | 1.11                    | 50.0    | 46.0   | 3     |
| GF40282B3-10000-ADP | ☼            | 24            | 117           | 2.81              | 10500 | 14.1    | 0.71                    | 45.0    | 46.0   | 4     |

■ Function (IP68) R Type : FEP / F Type : GEP / PWM : HEP, QEP, SEP  
(GR487) R Type : FDP / F Type : GDP / PWM : HDP, QDP, SDP

■ Air Flow-Static Pressure Characteristics

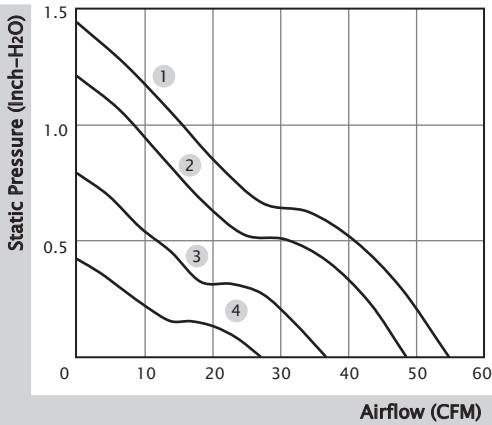


■ External Dimensions(mm)

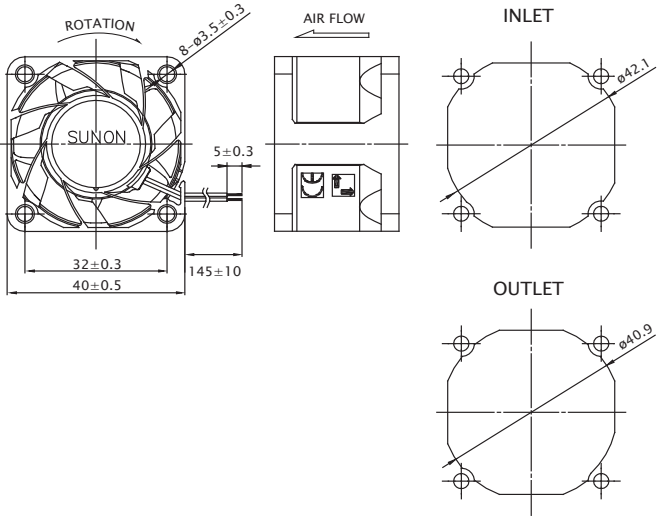

40x40x56 mm

26.9~31.7 CFM









#### ■ Specification

| Model               | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed       | Airflow | Static Pressure         | Noise   | Weight | Curve |
|---------------------|--------------|---------------|---------------|-------------------|-------------|---------|-------------------------|---------|--------|-------|
|                     | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM)       | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| PF40561BX-10000-A9H | ☉            | 12            | 1390          | 16.68             | 21500/18000 | 31.7    | 3.76                    | 65.9    | 87.0   | 1     |
| PF40561B1-10000-A9H | ☉            | 12            | 890           | 10.68             | 18000/15000 | 26.9    | 2.64                    | 62.3    | 87.0   | 2     |

■ Function R Type : F9H / F Type : G9H / PWM : H9H, Q9H, S9H

#### ■ External dimensions(mm)



#### ■ Air Flow-Static Pressure Characteristics

