



109E5712F501 With pulse sensor

Operating voltage range

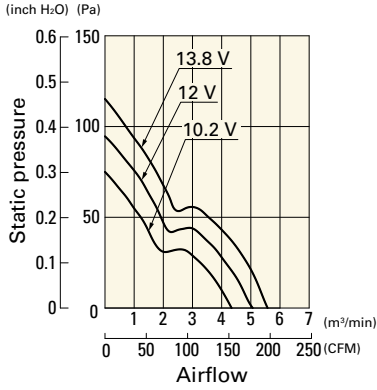


109E5712M501 With pulse sensor

Operating voltage range

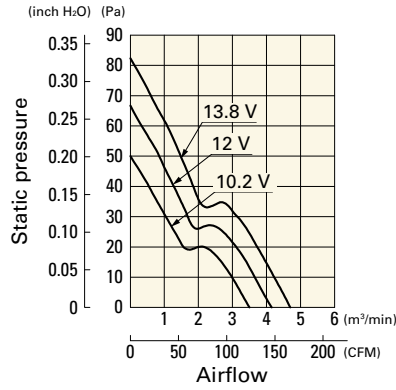


109E5724C501 With pulse sensor

Operating voltage range

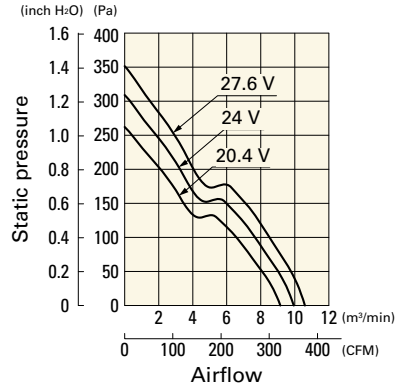


109E5724K501 With pulse sensor

Operating voltage range

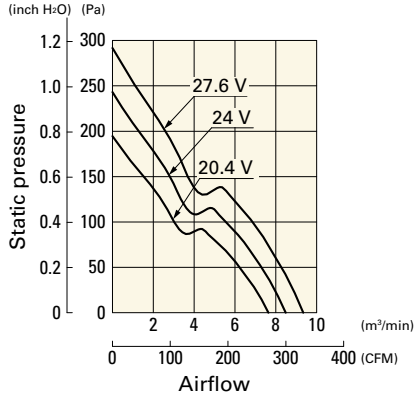


109E5724H501 With pulse sensor

Operating voltage range

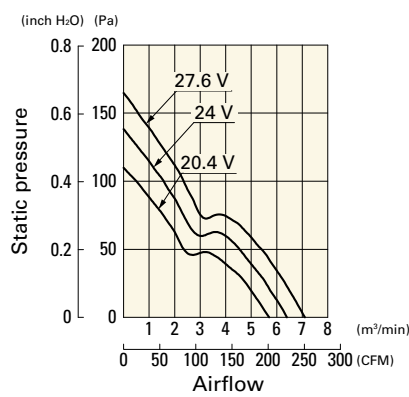


109E5724F501 With pulse sensor

Operating voltage range

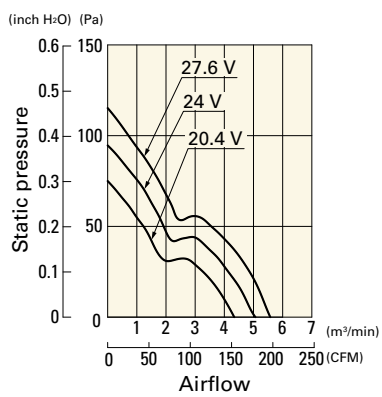


109E5724M501 With pulse sensor

Operating voltage range

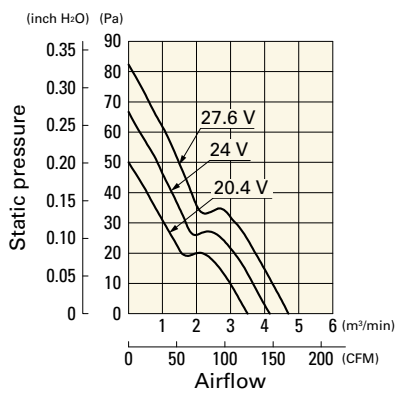


109E5748C501 With pulse sensor

Operating voltage range

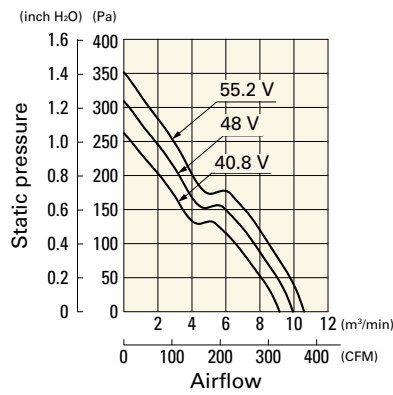


109E5748K501 With pulse sensor

Operating voltage range

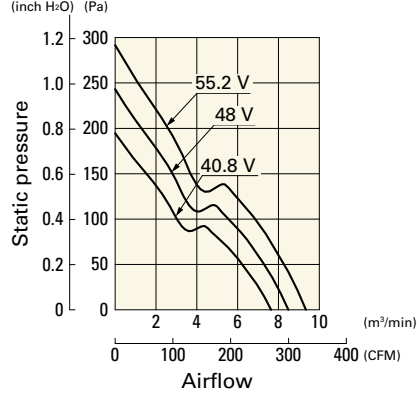


109E5748H501 With pulse sensor

Operating voltage range

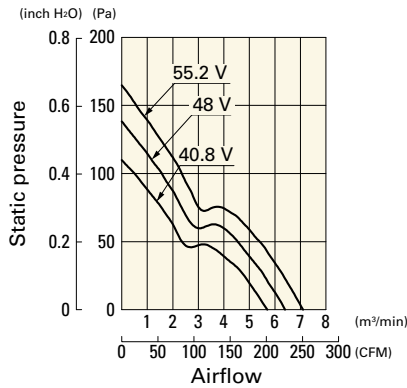


109E5748F501 With pulse sensor


Operating voltage range

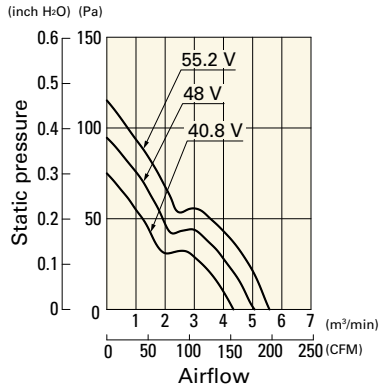


109E5748M501 With pulse sensor

Operating voltage range

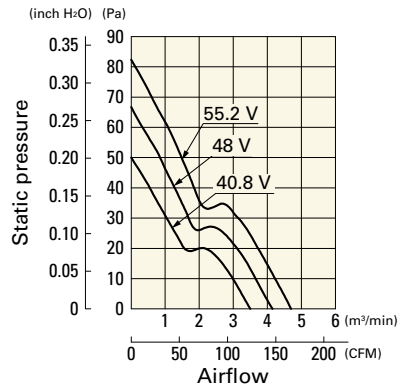

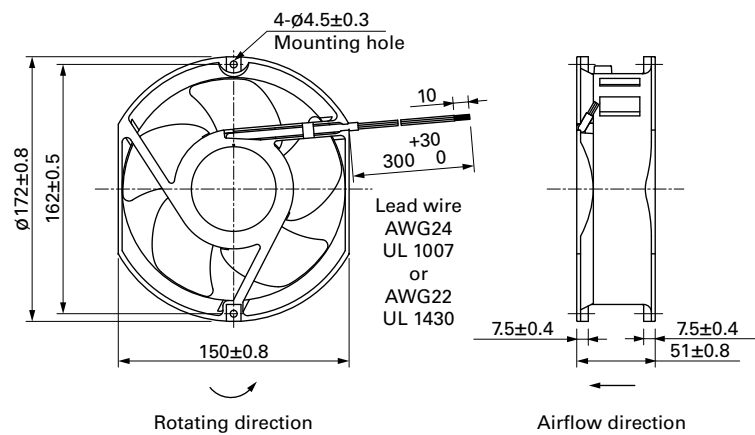

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

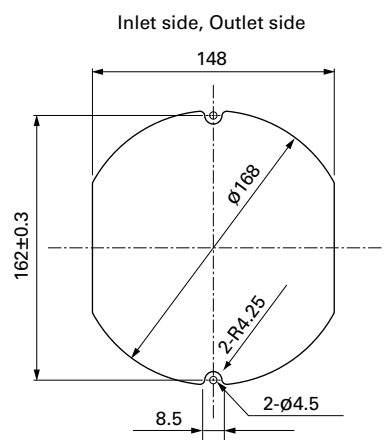

Options

Finger guards

page: p. 600

Model no.: 109-319J, 109-319E, 109-319H

Ø172x51 mm

San Ace 172 9E type



Round type



General Specifications

- Material Frame: Aluminum, Impeller: Plastic (Flammability: UL 94V-1)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)
Expected life at 40°C is for reference only.
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 616.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ min. at 500 VDC (between lead wire conductors and frame)
- Sound pressure level (SPL) A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire ⊕Red ⊖Black or Blue ☐Sensor ☐Yellow
- Mass 780 g

Specifications

The models listed below **have a pulse sensor**.


Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min ⁻¹]	Max. airflow [m³/min] [CFM]		Max. static pressure [Pa] [inchH ₂ O]		SPL [dB (A)]	Operating temperature [°C]	Expected life [h]	
109E1712K501	12	10.2 to 13.8	2.9	34.8	4100	8.5	300	243.0	0.976	55	-20 to +60	40000/60°C (70000/40°C)	
109E1712Y501			2.3	27.6	3800	7.8	276	210.0	0.843	53			
109E1712H501			1.2	14.4	3050	6.4	226	137.2	0.551	47			
109E1712F501			0.68	10.8	2500	5.1	180	95.0	0.382	42			
109E1712M501			0.48	5.76	2000	4.2	148	67.6	0.271	36			
109E1724C501	24	20.4 to 27.6	2.3	55.2	4800	9.9	350	308.0	1.237	60	-20 to +70		
109E1724K501			1.3	31.2	4100	8.5	300	243.0	0.976	55			
109E1724H501			0.58	13.92	3050	6.4	226	137.2	0.551	47			
109E1724F501			0.35	8.4	2500	5.1	180	95	0.382	42			
109E1724M501			0.2	4.8	2000	4.2	148	67.6	0.271	36			
109E1748C501	48	40.8 to 55.2	1.2	57.6	4800	9.9	350	308.0	1.237	60	-20 to +60		
109E1748K501			0.7	33.6	4100	8.5	300	243.0	0.976	55			
109E1748H501			0.28	13.44	3050	6.4	226	137.2	0.551	47			-20 to +70
109E1748F501			0.19	9.12	2500	5.1	180	95	0.382	42			
109E1748M501			0.11	5.28	2000	4.2	148	67.6	0.271	36			

Note: Sensor and control options are available for selection. Refer to the table on p. 644.

Airflow - Static Pressure Characteristics


109E1712K501 With pulse sensor

Operating voltage range

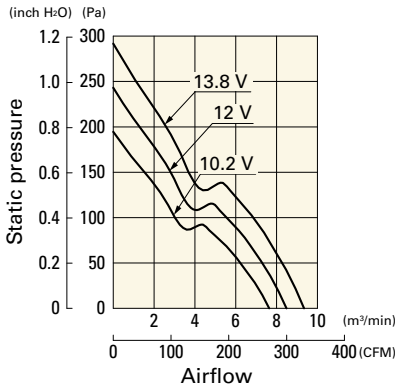


109E1712Y501 With pulse sensor

Operating voltage range

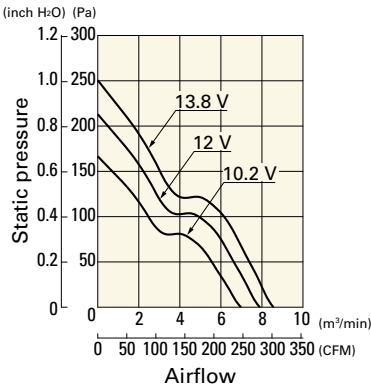


109E1712H501 With pulse sensor

Operating voltage range

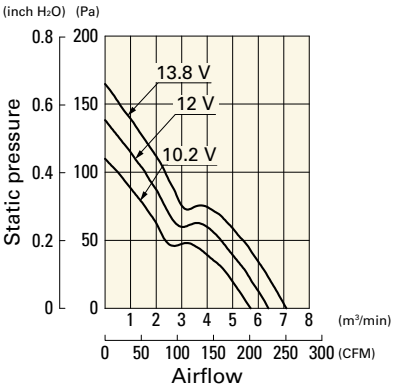


109E1712F501 With pulse sensor

Operating voltage range

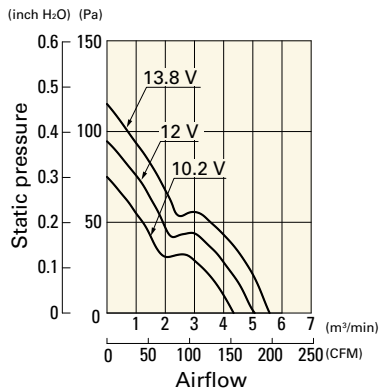


109E1712M501 With pulse sensor

Operating voltage range

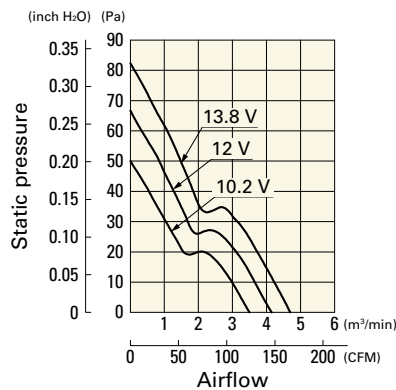


109E1724C501 With pulse sensor

Operating voltage range

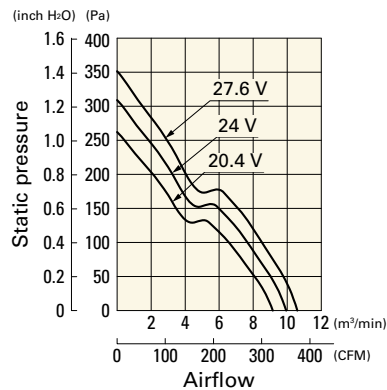


109E1724K501 With pulse sensor

Operating voltage range

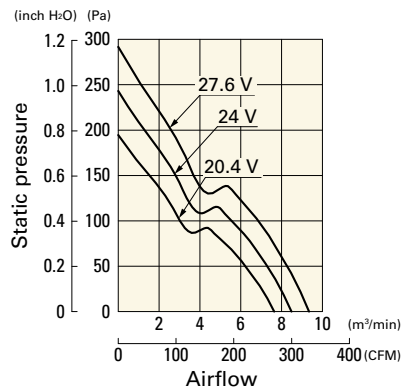


109E1724H501 With pulse sensor

Operating voltage range

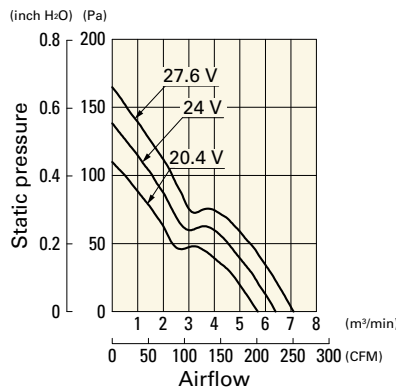


109E1724F501 With pulse sensor

Operating voltage range

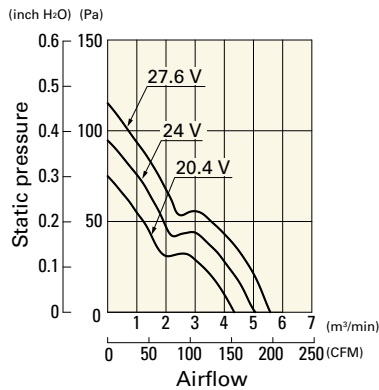


109E1724M501 With pulse sensor

Operating voltage range

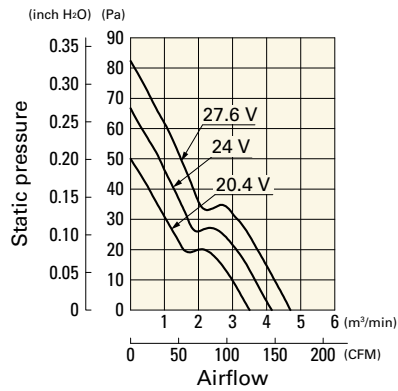


109E1748C501 With pulse sensor

Operating voltage range

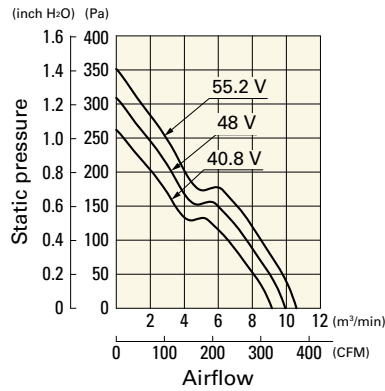


109E1748K501 With pulse sensor

Operating voltage range

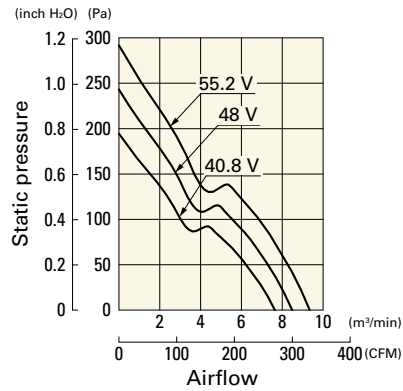


109E1748H501 With pulse sensor

Operating voltage range

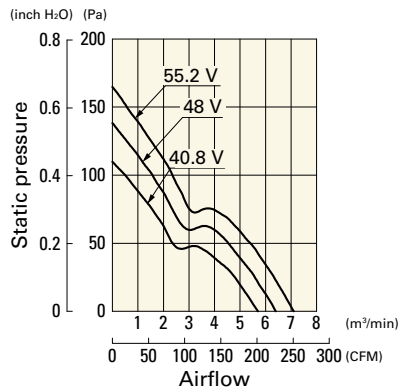


109E1748F501 With pulse sensor


Operating voltage range

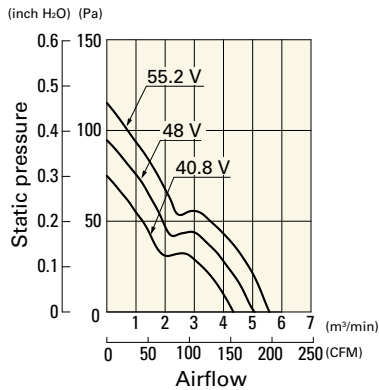


109E1748M501 With pulse sensor

Operating voltage range

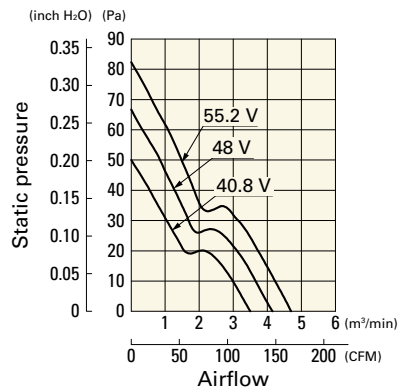

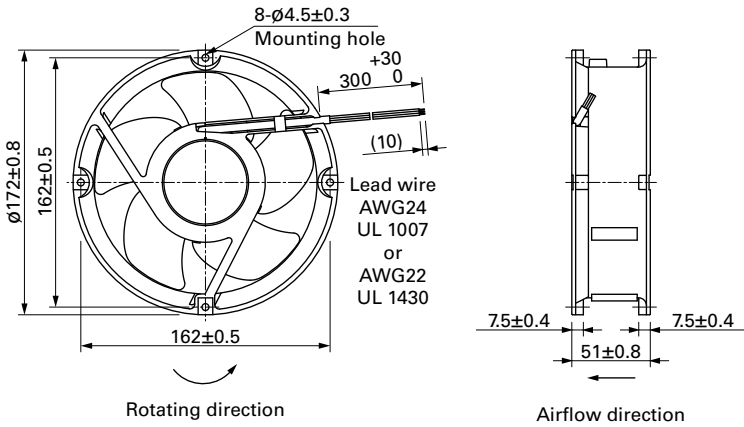

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

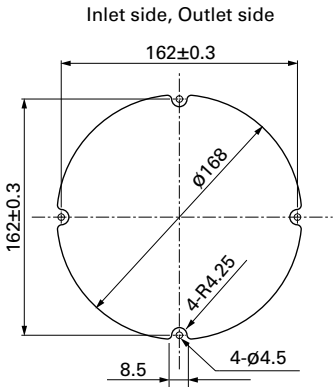

Options

Finger guards page: p. 600

Model no.: 109-319E, 109-319H, 109-1066