

92x92x25 mm


39.5~55.0 CFM



■ Specifications

| Model              | Bearing         | Rating Voltage | Power Current | Power Consumption | Speed | Air Flow | Static Pressure         | Noise   | Weight | Curve |
|--------------------|-----------------|----------------|---------------|-------------------|-------|----------|-------------------------|---------|--------|-------|
|                    | 2BALL<br>Sleeve | (VDC)          | (mA)          | (WATTS)           | (RPM) | (CFM)    | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| EE92251BX-000U-A99 | ☉               | 12             | 190           | 2.30              | 3400  | 55.0     | 0.21                    | 37.5    | 89.0   | 1     |
| EE92251B1-000U-A99 | ☉               | 12             | 165           | 2.00              | 3000  | 51.5     | 0.15                    | 34.0    | 94.0   | 2     |
| EE92251B2-000U-999 | ☉               | 12             | 135           | 1.60              | 2700  | 45.0     | 0.13                    | 32.0    | 94.0   | 3     |
| EE92251B3-000U-999 | ☉               | 12             | 105           | 1.30              | 2400  | 39.5     | 0.10                    | 28.0    | 94.0   | 4     |
| EE92252BX-000U-A99 | ☉               | 24             | 100           | 2.40              | 3400  | 55.0     | 0.21                    | 37.5    | 89.0   | 1     |
| EE92252B1-000U-A99 | ☉               | 24             | 87            | 2.10              | 3000  | 51.5     | 0.15                    | 34.0    | 94.0   | 2     |
| EE92252B2-000U-999 | ☉               | 24             | 70            | 1.70              | 2700  | 45.0     | 0.13                    | 32.0    | 94.0   | 3     |
| EE92252B3-000U-999 | ☉               | 24             | 57            | 1.40              | 2400  | 39.5     | 0.10                    | 28.0    | 94.0   | 4     |
| EE92252S1-000U-A99 | ○               | 24             | 87            | 2.10              | 3000  | 51.5     | 0.15                    | 34.0    | 94.0   | 2     |
| EE92252S2-000U-999 | ○               | 24             | 72            | 1.70              | 2700  | 45.0     | 0.13                    | 32.0    | 94.0   | 3     |
| EE92252S3-000U-999 | ○               | 24             | 60            | 1.40              | 2400  | 39.5     | 0.10                    | 28.0    | 94.0   | 4     |


■ Air Flow-Static Pressure Characteristics

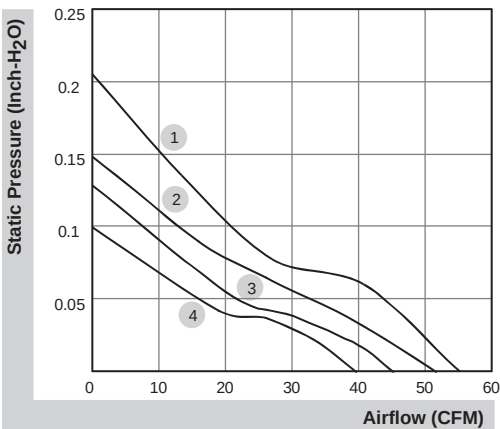

\*All model could be customized. Please contact with Sunon Sales

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd  
+86 10-62547612  
zhangyu@bjhengrui.cn  
en.bjhengrui.com

■ External dimensions(mm)

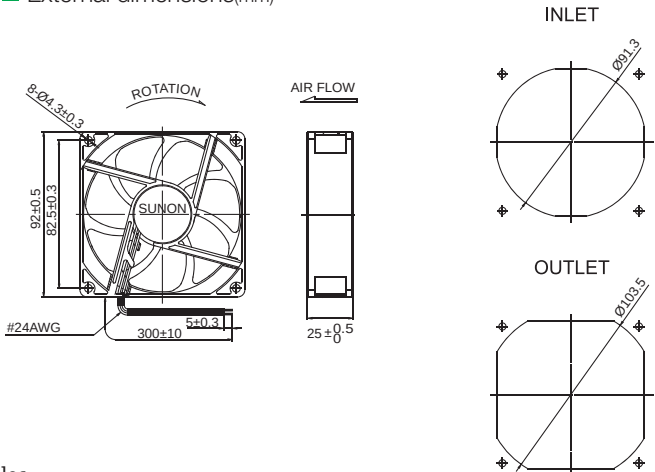

92x92x25 mm


28.4 CFM




■ Specifications

|  | Bearing | Rating Voltage | Power Current | Power Consumption | Speed | Air Flow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|----------------|---------------|-------------------|-------|----------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)          | (mA)          | (WATTS)           | (RPM) | (CFM)    | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| HA92251V4-1000U-A99                                                               | ●       | 12             | 45            | 0.54              | 1700  | 28.4     | 0.05                    | 17.7    | 92.0   | 1     |

■ Air Flow-Static Pressure Characteristics

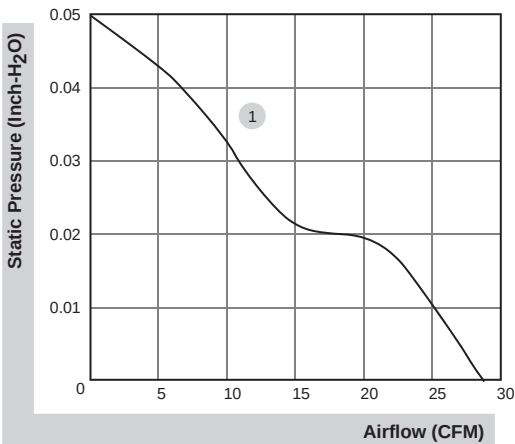

■ External dimensions(mm)

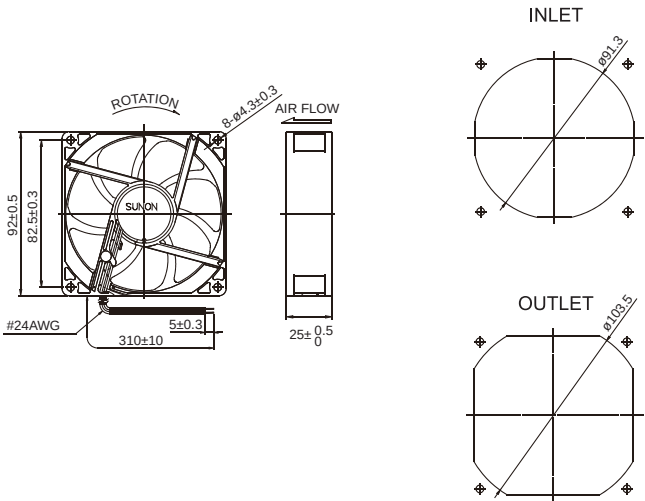

\*All model could be customized. Please contact with Sunon Sales

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd  
+86 10-62547612  
zhangyu@bjhengrui.cn  
en.bjhengrui.com

92x92x38 mm


91.7~120.2 CFM




## Specifications

| Model                | Bearing      | Rating Voltage | Power Current | Power Consumption | Speed | Air Flow | Static Pressure         | Noise   | Weight | Curve |
|----------------------|--------------|----------------|---------------|-------------------|-------|----------|-------------------------|---------|--------|-------|
|                      | 2BALL Sleeve | (VDC)          | (mA)          | (WATTS)           | (RPM) | (CFM)    | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| PMD1209PMB1-A (2).GN | ☉            | 12             | 1040          | 12.5              | 4900  | 120.2    | 0.71                    | 57.6    | 190.0  | 1     |
| PMD1209PMB2-A (2).GN | ☉            | 12             | 710           | 8.5               | 4400  | 106.3    | 0.56                    | 53.8    | 190.0  | 2     |
| PMD1209PMB3-A (2).GN | ☉            | 12             | 470           | 5.6               | 3800  | 91.7     | 0.43                    | 50.3    | 190.0  | 3     |
| PMD2409PMB1-A (2).GN | ☉            | 24             | 510           | 12.2              | 4900  | 120.2    | 0.71                    | 57.6    | 190.0  | 1     |
| PMD2409PMB2-A (2).GN | ☉            | 24             | 400           | 9.6               | 4400  | 106.3    | 0.56                    | 53.8    | 190.0  | 2     |
| PMD2409PMB3-A (2).GN | ☉            | 24             | 250           | 6.0               | 3800  | 91.7     | 0.43                    | 50.3    | 190.0  | 3     |
| PMD4809PMB1-A (2).GN | ☉            | 48             | 240           | 11.5              | 4900  | 120.2    | 0.71                    | 57.6    | 190.0  | 1     |
| PMD4809PMB2-A (2).GN | ☉            | 48             | 160           | 7.7               | 4400  | 106.3    | 0.56                    | 53.8    | 190.0  | 2     |
| PMD4809PMB3-A (2).GN | ☉            | 48             | 120           | 5.8               | 3800  | 91.7     | 0.43                    | 50.3    | 190.0  | 3     |

## Air Flow-Static Pressure Characteristics

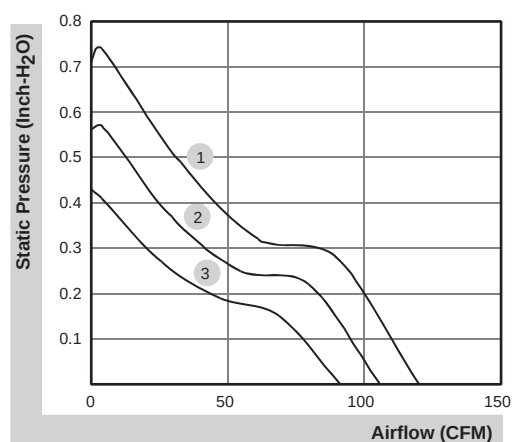

## External dimensions(mm)

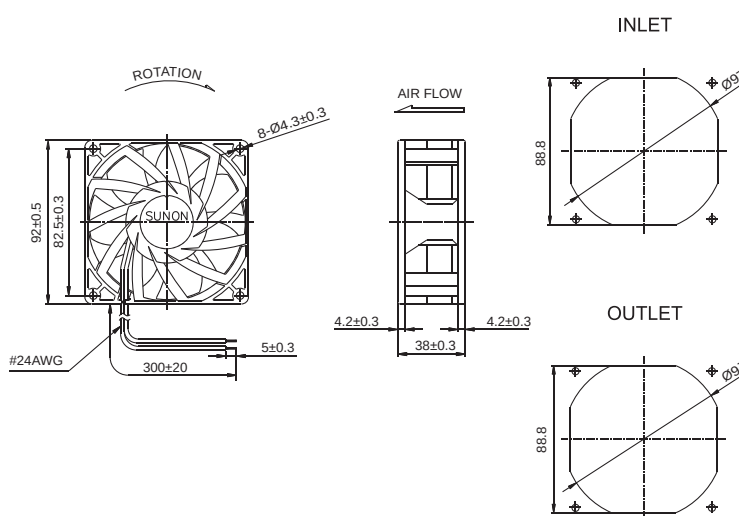

\*All model could be customized. Please contact with Sunon Sales

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd  
+86 10-62547612  
zhangyu@bjhengrui.cn  
en.bjhengrui.com