

120x120x38 mm

93.0~138.0 CFM




## ■ Specification


|  | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO       | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| MEC0381V1-0000-A99                                                                | ●            | 12            | 833           | 10.0              | 3100  | 138.0   | 0.36                    | 48.0    | 218.0  | 1     |
| MEC0381V2-0000-A99                                                                | ●            | 12            | 421           | 5.1               | 2600  | 116.0   | 0.26                    | 44.0    | 218.0  | 2     |
| MEC0381V3-0000-A99                                                                | ●            | 12            | 241           | 2.9               | 2100  | 93.0    | 0.18                    | 37.0    | 218.0  | 3     |
| MEC0382V1-0000-A99                                                                | ●            | 24            | 383           | 9.2               | 3100  | 138.0   | 0.36                    | 48.0    | 218.0  | 1     |
| MEC0382V2-0000-A99                                                                | ●            | 24            | 224           | 5.4               | 2600  | 116.0   | 0.26                    | 44.0    | 218.0  | 2     |
| MEC0382V3-0000-A99                                                                | ●            | 24            | 130           | 3.1               | 2100  | 93.0    | 0.18                    | 37.0    | 218.0  | 3     |
| Model                                                                             | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| EEC0381B1-0000-A99                                                                | ☉            | 12            | 833           | 10.0              | 3100  | 138.0   | 0.36                    | 48.0    | 214.0  | 1     |
| EEC0381B2-0000-A99                                                                | ☉            | 12            | 421           | 5.1               | 2600  | 116.0   | 0.26                    | 44.0    | 214.0  | 2     |
| EEC0381B3-0000-A99                                                                | ☉            | 12            | 241           | 2.9               | 2100  | 93.0    | 0.18                    | 37.0    | 214.0  | 3     |
| EEC0382B1-0000-A99                                                                | ☉            | 24            | 383           | 9.2               | 3100  | 138.0   | 0.36                    | 48.0    | 214.0  | 1     |
| EEC0382B2-0000-A99                                                                | ☉            | 24            | 224           | 5.4               | 2600  | 116.0   | 0.26                    | 44.0    | 214.0  | 2     |
| EEC0382B3-0000-A99                                                                | ☉            | 24            | 130           | 3.1               | 2100  | 93.0    | 0.18                    | 37.0    | 214.0  | 3     |
| EEC0384B1-0000-A99                                                                | ☉            | 48            | 203           | 9.7               | 3100  | 138.0   | 0.36                    | 48.0    | 214.0  | 1     |
| EEC0384B2-0000-A99                                                                | ☉            | 48            | 120           | 5.8               | 2600  | 116.0   | 0.26                    | 44.0    | 214.0  | 2     |
| EEC0384B3-0000-A99                                                                | ☉            | 48            | 69            | 3.3               | 2100  | 93.0    | 0.18                    | 37.0    | 214.0  | 3     |

## ■ Function R Type : F99 / F Type : G99

## ■ Air Flow-Static Pressure Characteristics

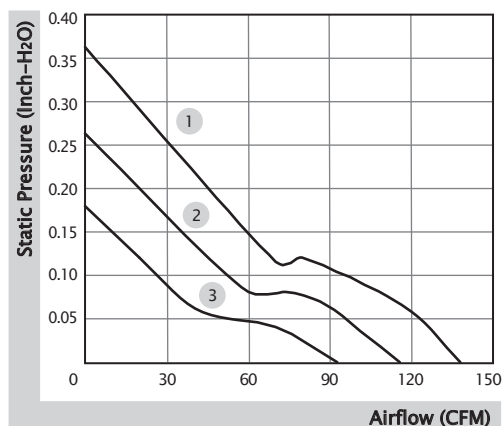

## ■ External Dimensions(mm)

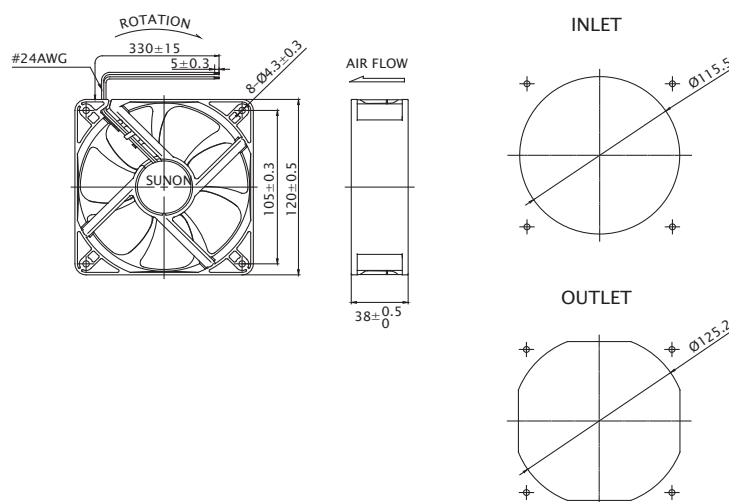

140x140x38 mm

238.5~297.9 CFM




#### ■ Specification


| Model              | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|--------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                    | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| PFE0381BX-0000-A99 | ☉            | 12            | 3300          | 39.60             | 6800  | 297.9   | 2.05                    | 68.3    | 472.0  | 1     |
| PFE0381B1-0000-A99 | ☉            | 12            | 1720          | 20.64             | 5500  | 238.5   | 1.20                    | 62.0    | 472.0  | 2     |

■ Function R Type : F99 / F Type : G99 / PWM : H99, Q99, S99

#### ■ Air Flow-Static Pressure Characteristics

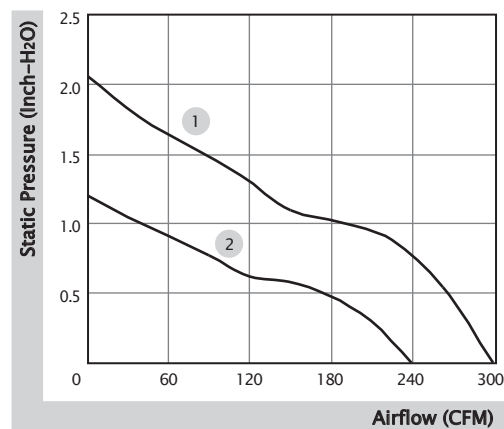

#### ■ External Dimensions(mm)

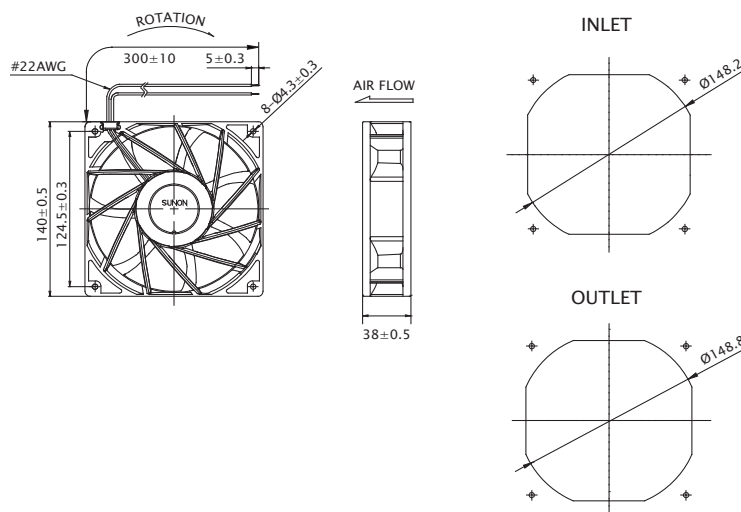

140x140x38 mm

282.6 CFM




■ Specification

| Model              | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|--------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                    | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| PFE0384BX-0000-A99 | ☉            | 48            | 740           | 35.52             | 6600  | 282.6   | 1.88                    | 65.9    | 560.0  | 1     |

■ Function    R Type : F99   /   F Type : G99   /   PWM : H99, Q99, S99

■ Air Flow-Static Pressure Characteristics

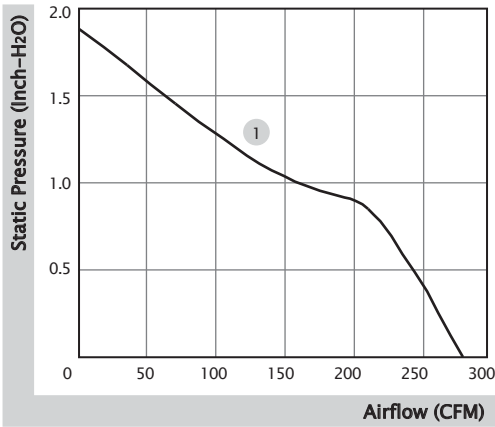

■ External Dimensions(mm)

