

40x40x10 mm

5.5~10.0 CFM




■ Specification


| Model               | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|---------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                     | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| EF40101BX-10000-A99 | ☉            | 12            | 122           | 1.47              | 9000  | 10.0    | 0.27                    | 33.7    | 15.8   | 1     |
| EF40101B1-10000-A99 | ☉            | 12            | 82            | 0.99              | 7000  | 8.0     | 0.19                    | 27.3    | 15.8   | 2     |
| EF40101B2-10000-A99 | ☉            | 12            | 37            | 0.45              | 5000  | 5.5     | 0.10                    | 17.7    | 15.8   | 3     |

■ Function    R Type : F99    /    F Type : G99

■ Air Flow-Static Pressure Characteristics

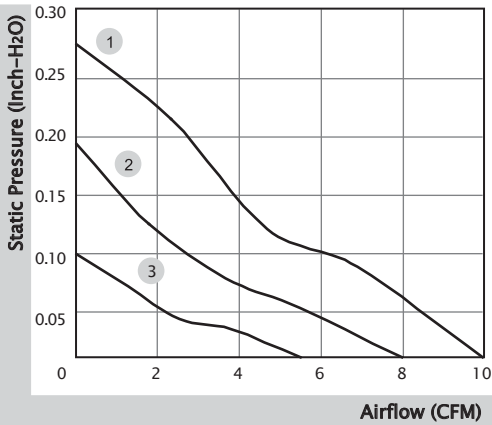

■ External Dimensions(mm)

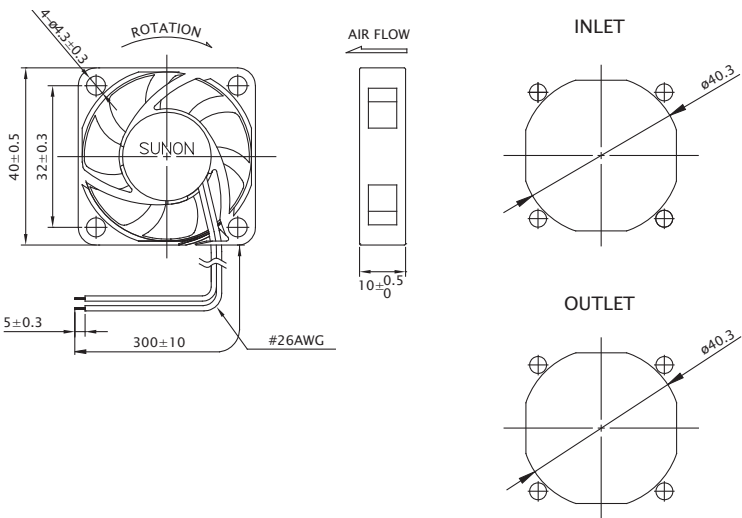

40x40x10 mm

5.4 CFM




#### ■ Specification


|  | Bearing | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| HA40101V4-10000-A99                                                               | ●       | 12            | 31            | 0.38              | 5000  | 5.4     | 0.09                    | 15.7    | 15.4   | 1     |

#### ■ Function F Type : G99

#### ■ Air Flow-Static Pressure Characteristics

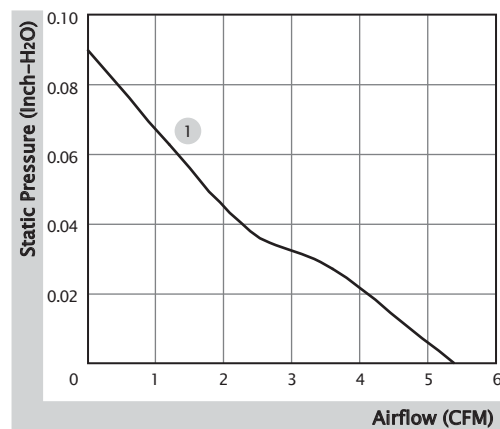

#### ■ External Dimensions(mm)

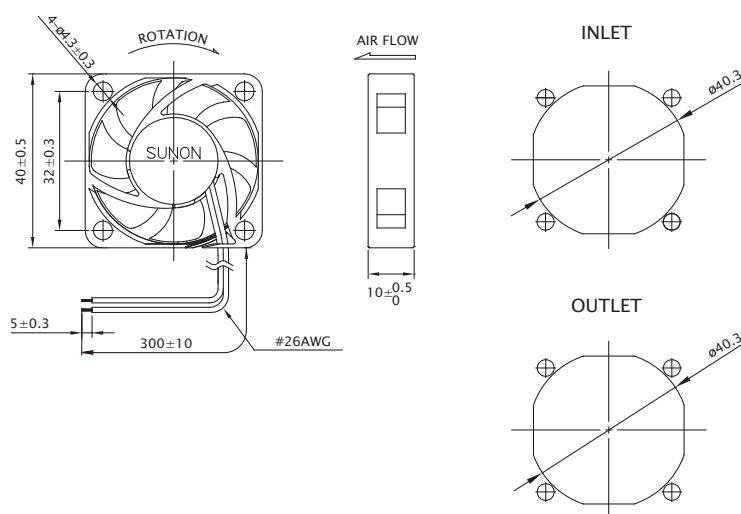

40x40x20 mm

6.3~10.8 CFM




# ■ Specification

|  | Bearing | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| MF40200V1-10000-A99                                                               | ●       | 5             | 150           | 0.75              | 7000  | 8.9     | 0.22                    | 25.5    | 29.0   | 2     |
| MF40200V2-10000-A99                                                               | ●       | 5             | 107           | 0.54              | 6000  | 7.7     | 0.17                    | 21.0    | 29.0   | 3     |
| MF40200V3-10000-A99                                                               | ●       | 5             | 75            | 0.38              | 5000  | 6.3     | 0.11                    | 16.5    | 29.0   | 4     |
| MF40201VX-10000-A99                                                               | ●       | 12            | 80            | 0.96              | 8000  | 10.8    | 0.29                    | 27.5    | 29.0   | 1     |
| MF40201V1-10000-A99                                                               | ●       | 12            | 58            | 0.70              | 7000  | 8.9     | 0.22                    | 25.5    | 29.0   | 2     |
| MF40201V2-10000-A99                                                               | ●       | 12            | 45            | 0.54              | 6000  | 7.7     | 0.17                    | 21.0    | 29.0   | 3     |
| MF40201V3-10000-A99                                                               | ●       | 12            | 38            | 0.46              | 5000  | 6.3     | 0.11                    | 16.5    | 29.0   | 4     |
| MF40202VX-10000-A99                                                               | ●       | 24            | 39            | 0.94              | 8000  | 10.8    | 0.29                    | 27.5    | 29.0   | 1     |
| MF40202V1-10000-A99                                                               | ●       | 24            | 32            | 0.77              | 7000  | 8.9     | 0.22                    | 25.5    | 29.0   | 2     |
| MF40202V2-10000-A99                                                               | ●       | 24            | 25            | 0.60              | 6000  | 7.7     | 0.17                    | 21.0    | 29.0   | 3     |

# ■ Function (MF Series) R Type : F99 / F Type : G99

## ■ Air Flow-Static Pressure Characteristics

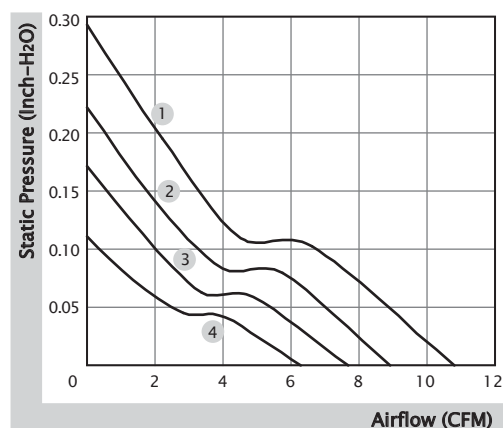

## ■ External Dimensions(mm)

