


40x40x20 mm

6.3~10.8 CFM




#### ■ Specification


|  | Bearing | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| EF40201BX-10000-A99                                                               | ☼       | 12            | 65            | 0.78              | 8200  | 10.8    | 0.32                    | 28.5    | 32.5   | 1     |
| EF40201B1-10000-A99                                                               | ☼       | 12            | 55            | 0.66              | 7200  | 8.9     | 0.24                    | 24.5    | 32.5   | 2     |
| EF40201B2-10000-A99                                                               | ☼       | 12            | 40            | 0.48              | 6200  | 7.7     | 0.18                    | 21.3    | 32.5   | 3     |
| EF40201B3-10000-A99                                                               | ☼       | 12            | 35            | 0.42              | 5200  | 6.3     | 0.14                    | 16.2    | 32.5   | 4     |

■ Function R Type : F99 / F Type : G99 / PWM : H99, Q99, S99

#### ■ Air Flow-Static Pressure Characteristics

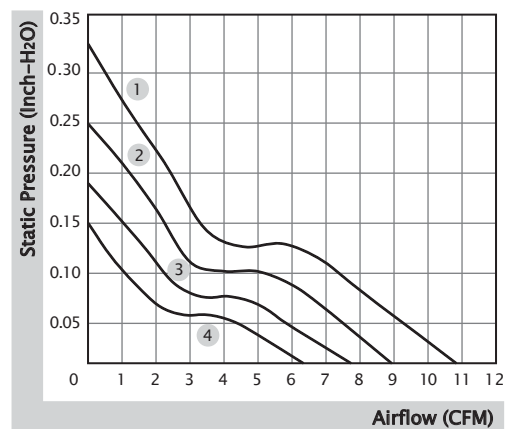

#### ■ External Dimensions(mm)

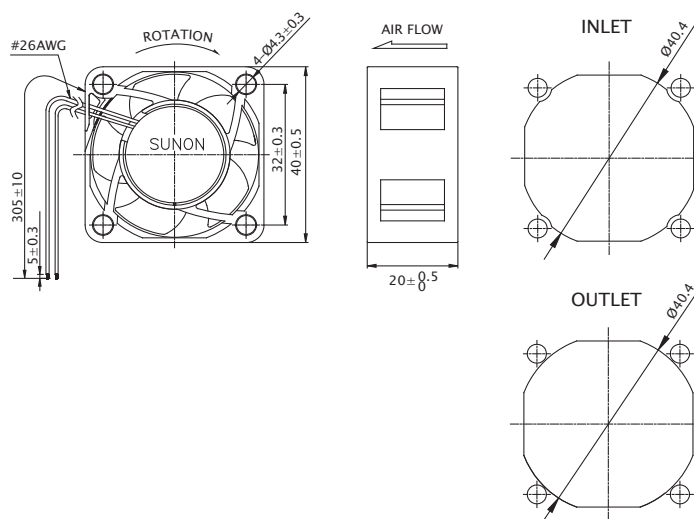

40x40x20 mm

5.5 CFM




■ Specification


|  | Bearing | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| HA40201V4-10000-A99                                                               | ●       | 12            | 31            | 0.38              | 4500  | 5.5     | 0.10                    | 12.3    | 30.6   | 1     |

■ Function    F Type : G99

■ Air Flow-Static Pressure Characteristics

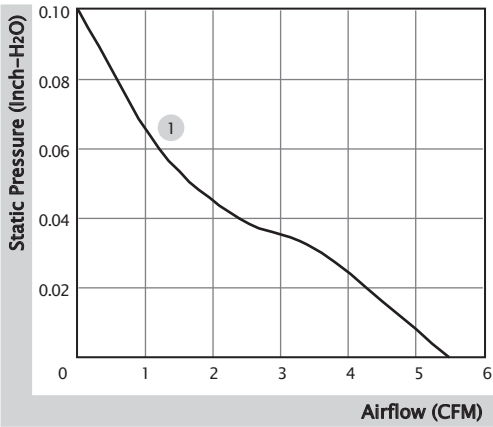

■ External Dimensions(mm)

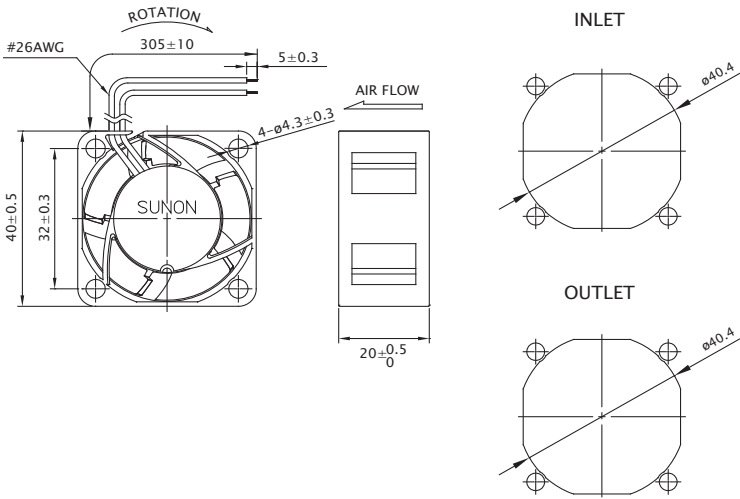

40x40x28 mm

25.6~31.5 CFM




■ Specification

| Model              | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|--------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                    | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| VF40281BX-0000-A9H | ☉            | 12            | 1140          | 13.68             | 27000 | 31.5    | 3.95                    | 63.7    | 46.0   | 1     |
| VF40281B1-0000-A9H | ☉            | 12            | 630           | 7.56              | 21600 | 25.6    | 2.77                    | 58.6    | 46.0   | 2     |

■ Function    F Type : G9H   /   PWM : S9H

■ Air Flow-Static Pressure Characteristics

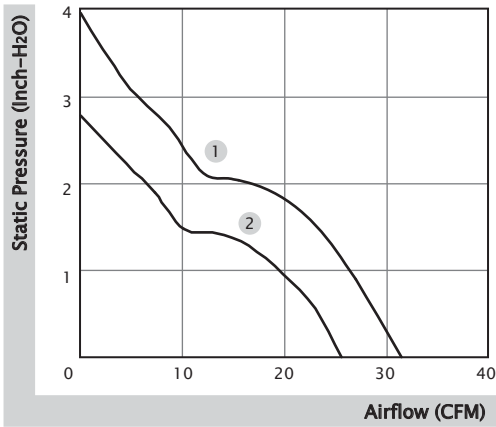

■ External Dimensions(mm)

