

60x60x25 mm

13.9~23.5 CFM




■ Specification


Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	2BALL Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
EF60251B1-10000-A99	☼	12	82	0.99	5200	23.5	0.22	31.5	54.4	1
EF60251B2-10000-A99	☼	12	58	0.70	4500	19.3	0.17	27.0	54.6	2
EF60251B3-10000-A99	☼	12	38	0.46	3400	13.9	0.10	20.0	54.0	3
EF60252B1-10000-A99	☼	24	45	1.08	5200	23.5	0.22	31.5	54.4	1

■ Function R Type : F99 / F Type : G99 / PWM : H99, Q99, S99

■ Air Flow-Static Pressure Characteristics

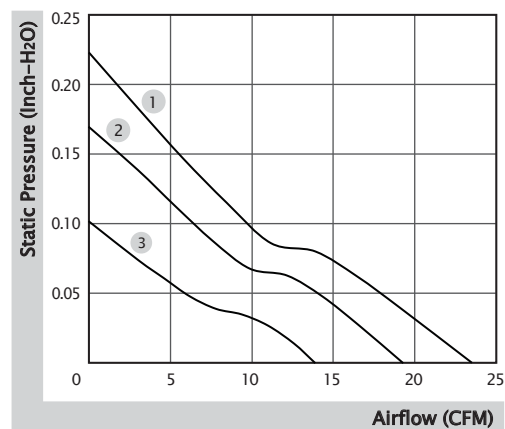

■ External Dimensions(mm)

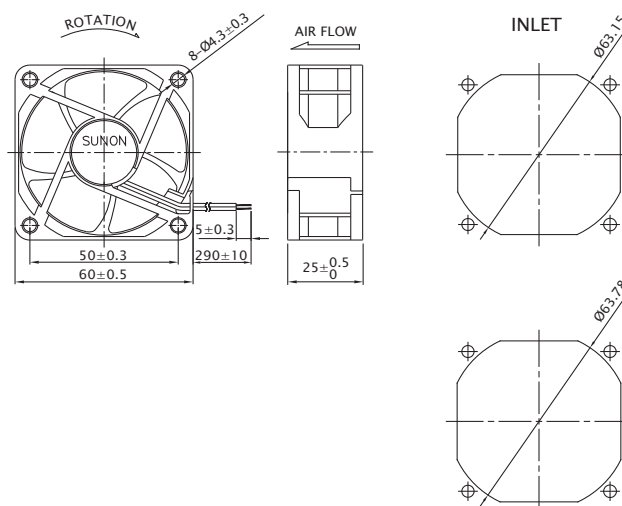

60x60x25 mm

16.0~27.0 CFM




■ Specification


	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	● VAPO	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
MF60251VX-10000-A99	●	12	130	1.56	5200	27.0	0.31	31.2	45.0	1
MF60251V1-10000-A99	●	12	75	0.90	4500	23.5	0.21	27.0	45.0	2
MF60251V2-10000-A99	●	12	72	0.87	3800	19.3	0.15	22.0	45.0	3
MF60251V3-10000-A99	●	12	44	0.53	3100	16.0	0.10	16.7	45.0	4
MF60252VX-10000-A99	●	24	80	1.92	5200	27.0	0.31	31.2	45.0	1
MF60252V1-10000-A99	●	24	50	1.20	4500	23.5	0.21	27.0	45.0	2
MF60252V2-10000-A99	●	24	30	0.72	3800	19.3	0.15	22.0	45.0	3
MF60252V3-10000-A99	●	24	22	0.53	3100	16.0	0.10	16.7	45.0	4
Model	● 2BALL ○ Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
EF60252S1-10000-A99	○	24	50	1.20	4500	23.5	0.21	27.0	45.0	2

■ Function (MF Series) R Type : F99 / F Type : G99
(EF Series) F Type : G99

■ Air Flow-Static Pressure Characteristics

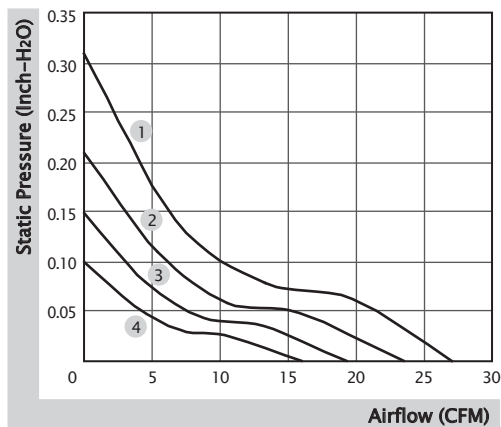

■ External Dimensions(mm)

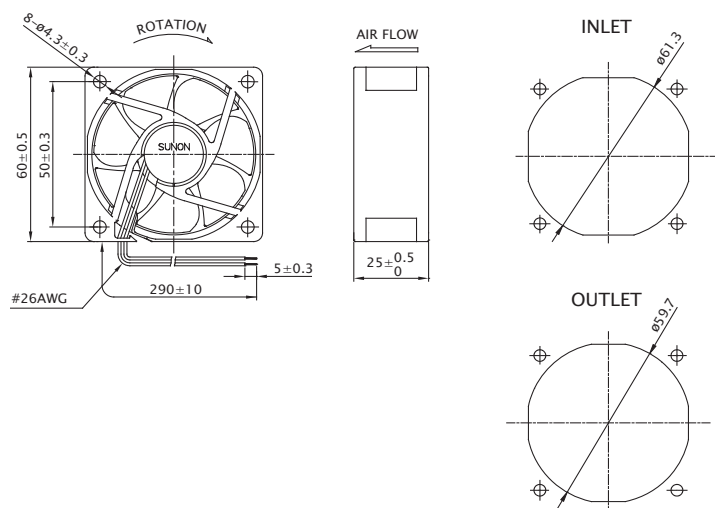

60x60x25 mm (GR487/IP68)

26.9~54.8 CFM




Specification

Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	2BALL Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
GF60252BX-10000-ADP	☼	24	545	13.08	12900	54.8	1.44	55.4	84.0	1
GF60252B1-10000-ADP	☼	24	405	9.72	11500	48.4	1.21	53.2	84.0	2
GF60252B2-10000-ADP	☼	24	208	5.00	9000	36.5	0.79	47.2	84.0	3
GF60252B3-10000-ADP	☼	24	115	2.76	6450	26.9	0.42	38.0	84.0	4
GF60252BX-10000-AEP	☼	24	545	13.08	12900	54.8	1.44	55.4	84.0	1
GF60252B1-10000-AEP	☼	24	405	9.72	11500	48.4	1.21	53.2	84.0	2
GF60252B2-10000-AEP	☼	24	208	5.00	9000	36.5	0.79	47.2	84.0	3
GF60252B3-10000-AEP	☼	24	115	2.76	6450	26.9	0.42	38.0	84.0	4

Function (GR487) R Type : FDP / F Type : GDP / PWM : HDP, QDP, SDP
(IP68) R Type : FEP / F Type : GEP / PWM : HEP, QEP, SEP

Air Flow-Static Pressure Characteristics

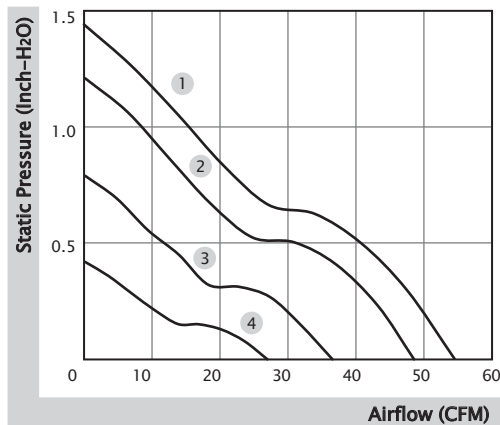

External Dimensions(mm)

