

80x80x15 mm

30.0~37.0 CFM




■ Specification


	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	● VAPO	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
EF80151S1-10000-999	○	12	148	1.78	3500	37.0	0.17	32.9	67.0	1
EF80151S2-10000-999	○	12	105	1.26	3100	33.6	0.13	29.9	67.0	2
EF80151S3-10000-999	○	12	87	1.05	2800	30.0	0.11	26.5	67.0	3

■ Function F Type : C99

■ Air Flow-Static Pressure Characteristics

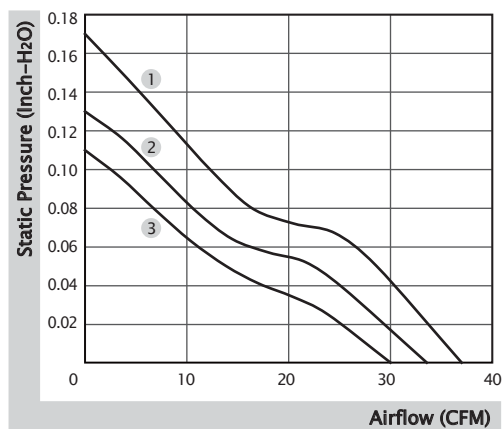

■ External Dimensions(mm)

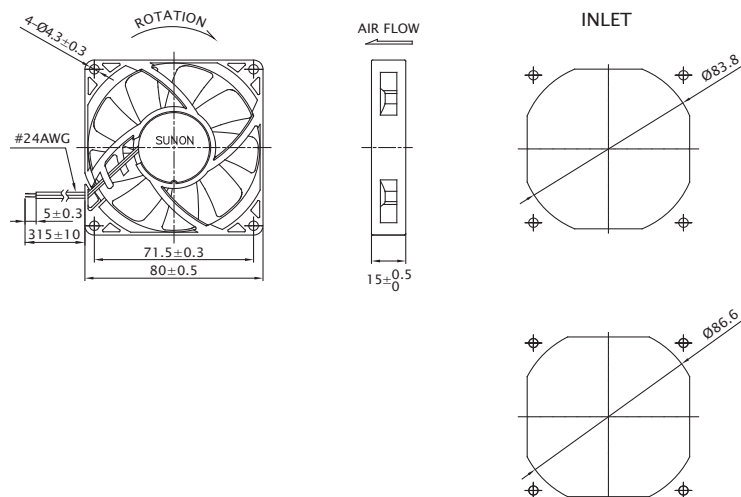

80x80x15 mm

30.0~37.0 CFM




■ Specification


	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	● VAPO	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
MF80151V1-10000-A99	●	12	125	1.50	3500	37.0	0.17	32.9	67.0	1
MF80151V2-10000-A99	●	12	94	1.13	3100	33.6	0.13	29.9	67.0	2
MF80151V3-10000-A99	●	12	71	0.86	2800	30.0	0.11	26.5	67.0	3
MF80152V1-10000-A99	●	24	68	1.64	3500	37.0	0.17	32.9	67.0	1
MF80152V2-10000-A99	●	24	55	1.32	3100	33.6	0.13	29.9	67.0	2
MF80152V3-10000-A99	●	24	40	0.96	2800	30.0	0.11	26.5	67.0	3

■ Function R Type : F99 / F Type : G99 / PWM : H99, Q99, S99

■ Air Flow-Static Pressure Characteristics

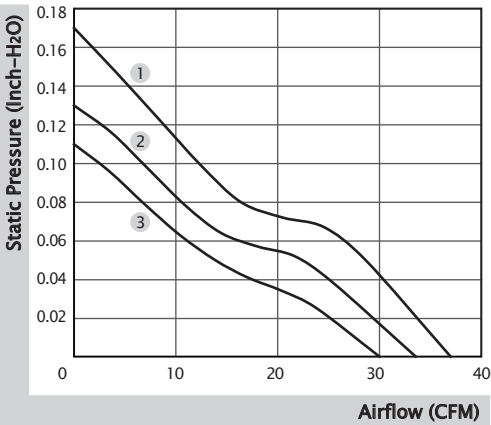

■ External Dimensions(mm)

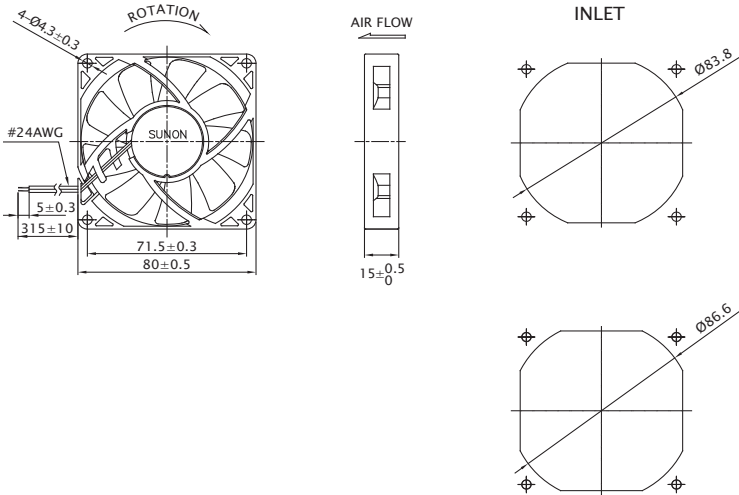

80x80x25 mm

53.0~60.0 CFM




■ Specification

	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	● VAPO	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
PF80251V1-10000-A99	●	12	310	3.72	4800	60.0	0.41	44.7	91.0	1
PF80251V2-10000-A99	●	12	240	2.88	4500	57.0	0.35	43.1	91.0	2
PF80251V3-10000-A99	●	12	200	2.40	4200	53.0	0.30	41.5	91.0	3
PF80252V1-10000-A99	●	24	180	4.32	4800	60.0	0.41	44.7	91.0	1
PF80252V2-10000-A99	●	24	126	3.03	4500	57.0	0.35	43.1	91.0	2
PF80252V3-10000-A99	●	24	110	2.64	4200	53.0	0.30	41.5	91.0	3

■ Function R Type : F99 / F Type : G99 / PWM : H99, Q99, S99

■ Air Flow-Static Pressure Characteristics

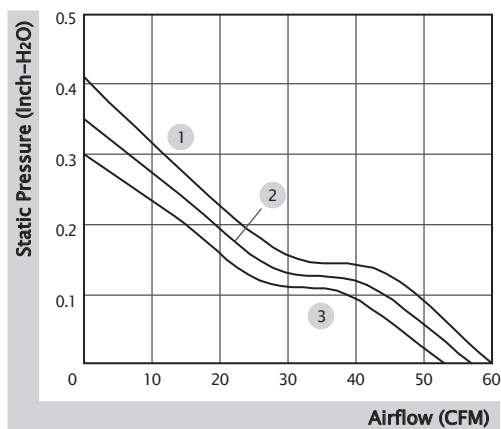

■ External Dimensions(mm)

