

92x92x25 mm

39.5~51.5 CFM




■ Specification


	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	● VAPO	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
EF92251B1-10000-A99	☼	12	125	1.50	3000	51.5	0.17	34.0	92.0	1
EF92251B2-10000-A99	☼	12	90	1.08	2700	45.0	0.15	32.0	92.0	2
EF92251B3-10000-A99	☼	12	62	0.75	2400	39.5	0.12	28.0	92.0	3
EF92252B1-10000-A99	☼	24	63	1.52	3000	51.5	0.17	34.0	92.0	1
EF92252B2-10000-A99	☼	24	45	1.08	2700	45.0	0.15	32.0	92.0	2

■ Function R Type : F99 / F Type : G99

■ Air Flow-Static Pressure Characteristics

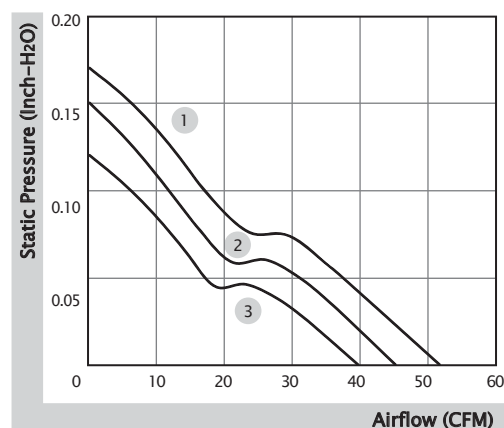

■ External Dimensions(mm)

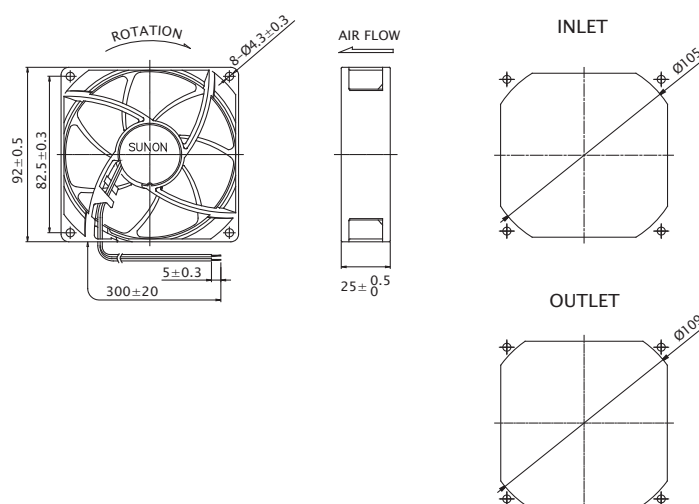

92x92x25 mm

55.0 CFM




■ Specification


Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	2BALL Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
EF92251BX-10000-A99	☉	12	135	1.62	3400	55.0	0.21	36.9	111.0	1
EF92252BX-10000-A99	☉	24	90	2.16	3400	55.0	0.21	36.9	109.0	1

■ Function R Type : F99 / F Type : G99 / PWM : H99, Q99, S99

■ Air Flow-Static Pressure Characteristics

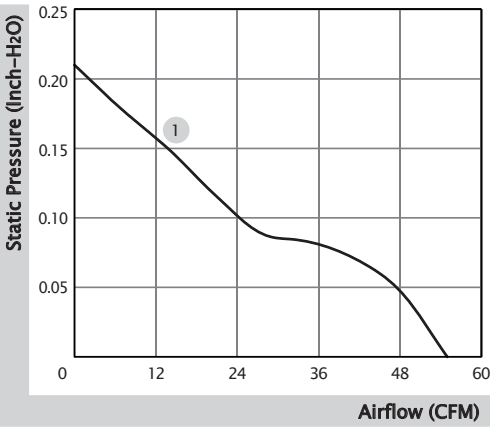

■ External Dimensions(mm)

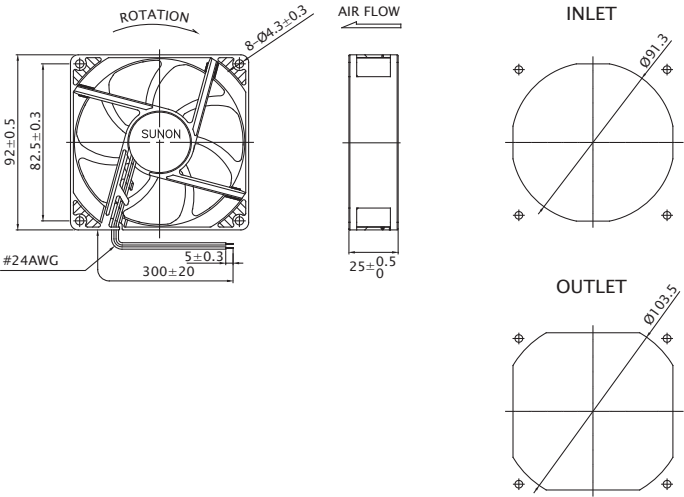

92x92x25 mm

28.4 CFM




■ Specification

	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	● VAPO	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
HA92251V4-10000-A99	●	12	45	0.54	1700	28.4	0.05	17.7	92.0	1

■ Function F Type : G99

■ Air Flow-Static Pressure Characteristics

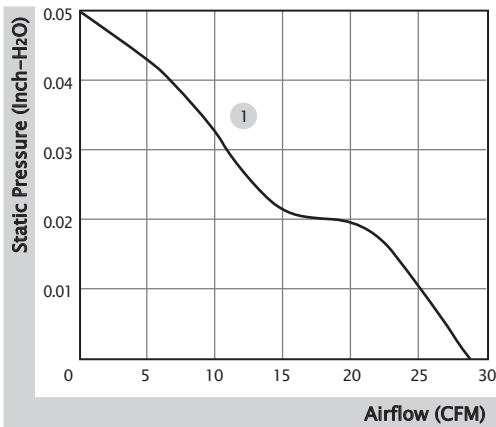

■ External Dimensions(mm)

