

92x92x25 mm

39.5~51.5 CFM




### ■ Specification


|  | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO       | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| MF92251V1-10000-A99                                                               | ●            | 12            | 140           | 1.68              | 3000  | 51.5    | 0.15                    | 34.0    | 92.0   | 1     |
| MF92251V2-10000-A99                                                               | ●            | 12            | 105           | 1.26              | 2700  | 45.0    | 0.13                    | 32.0    | 92.0   | 2     |
| MF92251V3-10000-A99                                                               | ●            | 12            | 75            | 0.90              | 2400  | 39.5    | 0.10                    | 28.0    | 92.0   | 3     |
| MF92252V1-10000-A99                                                               | ●            | 24            | 75            | 1.80              | 3000  | 51.5    | 0.15                    | 34.0    | 92.0   | 1     |
| MF92252V2-10000-A99                                                               | ●            | 24            | 55            | 1.32              | 2700  | 45.0    | 0.13                    | 32.0    | 92.0   | 2     |
| MF92252V3-10000-A99                                                               | ●            | 24            | 42            | 1.01              | 2400  | 39.5    | 0.10                    | 28.0    | 92.0   | 3     |
| Model                                                                             | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| EF92251S1-10000-A99                                                               | ○            | 12            | 140           | 1.68              | 3000  | 51.5    | 0.15                    | 34.0    | 92.0   | 1     |
| EF92251S2-10000-A99                                                               | ○            | 12            | 110           | 1.32              | 2700  | 45.0    | 0.13                    | 32.0    | 92.0   | 2     |
| EF92251S3-10000-A99                                                               | ○            | 12            | 80            | 0.96              | 2400  | 39.5    | 0.10                    | 28.0    | 92.0   | 3     |
| EF92252S1-10000-A99                                                               | ○            | 24            | 60            | 1.44              | 3000  | 51.5    | 0.15                    | 34.0    | 92.0   | 1     |

- Function (MF Series) R Type : F99 / F Type : G99  
 (EF Series, Speed 1) R Type : F99 / F Type : G99  
 (EF Series, Speed 2,3) F Type : G99

### ■ Air Flow-Static Pressure Characteristics

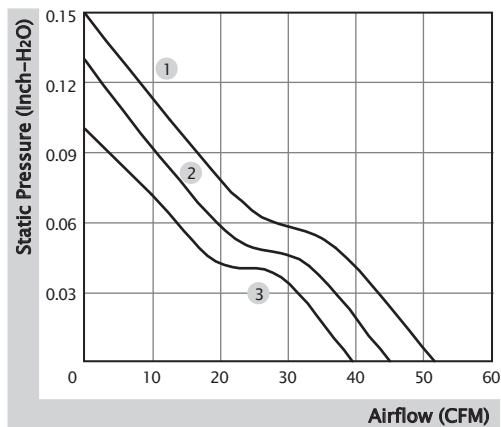

### ■ External Dimensions(mm)

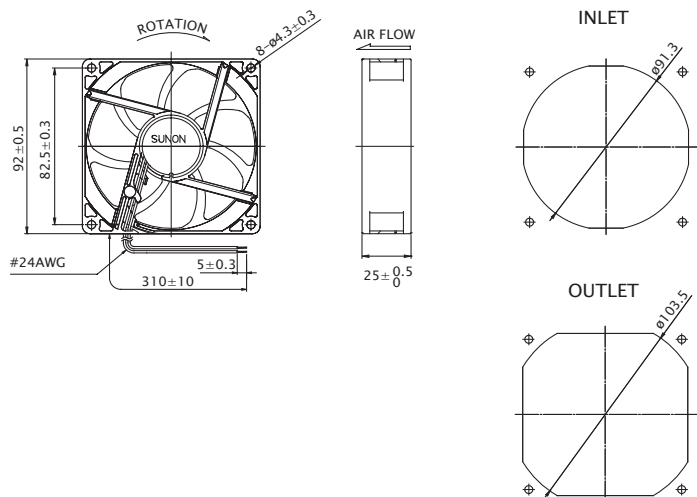

92x92x25 mm

39.5~51.5 CFM




# ■ Specification


|  | Bearing | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| EF92251B1-10000-A99                                                               | ☼       | 12            | 125           | 1.50              | 3000  | 51.5    | 0.17                    | 34.0    | 92.0   | 1     |
| EF92251B2-10000-A99                                                               | ☼       | 12            | 90            | 1.08              | 2700  | 45.0    | 0.15                    | 32.0    | 92.0   | 2     |
| EF92251B3-10000-A99                                                               | ☼       | 12            | 62            | 0.75              | 2400  | 39.5    | 0.12                    | 28.0    | 92.0   | 3     |
| EF92252B1-10000-A99                                                               | ☼       | 24            | 63            | 1.52              | 3000  | 51.5    | 0.17                    | 34.0    | 92.0   | 1     |
| EF92252B2-10000-A99                                                               | ☼       | 24            | 45            | 1.08              | 2700  | 45.0    | 0.15                    | 32.0    | 92.0   | 2     |

■ Function R Type : F99 / F Type : G99

# ■ Air Flow-Static Pressure Characteristics

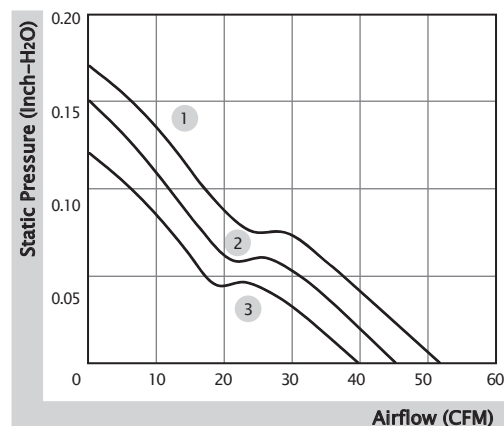

# ■ External Dimensions(mm)

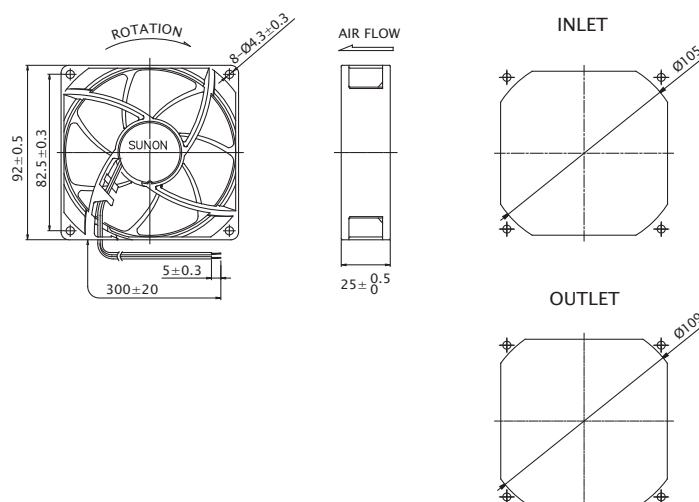

92x92x25 mm

55.0 CFM




■ Specification

| Model               | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|---------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                     | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| EF92251BX-10000-A99 | ☉            | 12            | 135           | 1.62              | 3400  | 55.0    | 0.21                    | 36.9    | 111.0  | 1     |
| EF92252BX-10000-A99 | ☉            | 24            | 90            | 2.16              | 3400  | 55.0    | 0.21                    | 36.9    | 109.0  | 1     |

■ Function    R Type : F99   /   F Type : G99   /   PWM : H99, Q99, S99

■ Air Flow-Static Pressure Characteristics

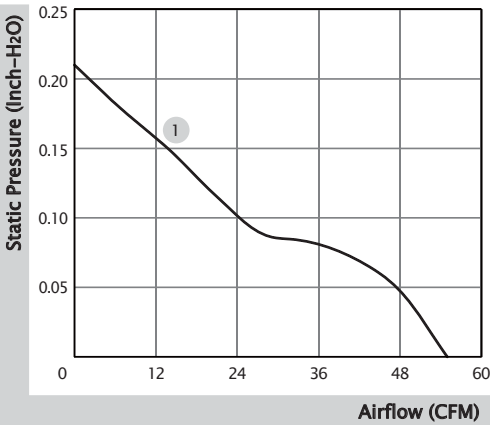

■ External Dimensions(mm)

