

120x120x38 mm

93.0~138.0 CFM




■ Specification


Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	2BALL Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
EFC0381B1-10000-A9H	☉	12	355	4.26	3700	138.0	0.40	48.0	248.0	1
EFC0381B2-10000-A9H	☉	12	245	2.94	3100	116.0	0.29	43.2	248.0	2
EFC0381B3-10000-A9H	☉	12	125	1.50	2400	93.0	0.19	36.0	248.0	3
EFC0382B1-10000-A9H	☉	24	195	4.68	3700	138.0	0.40	48.0	248.0	1
EFC0382B2-10000-A9H	☉	24	135	3.24	3100	116.0	0.29	43.2	248.0	2
EFC0382B3-10000-A9H	☉	24	75	1.80	2400	93.0	0.19	36.0	248.0	3

■ Function R Type : F9H / F Type : G9H / PWM : H9H, Q9H, S9H

■ Air Flow-Static Pressure Characteristics

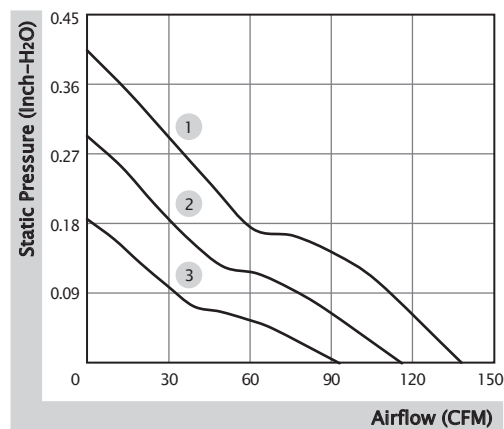

■ External Dimensions(mm)

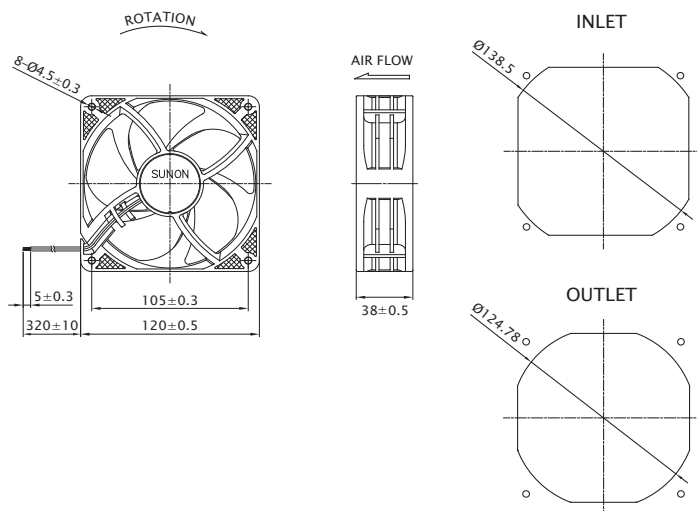

140x140x38 mm

238.5~297.9 CFM




■ Specification


Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	2BALL Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
PFE0381BX-0000-A99	☉	12	3300	39.60	6800	297.9	2.05	68.3	472.0	1
PFE0381B1-0000-A99	☉	12	1720	20.64	5500	238.5	1.20	62.0	472.0	2

■ Function R Type : F99 / F Type : G99 / PWM : H99, Q99, S99

■ Air Flow-Static Pressure Characteristics

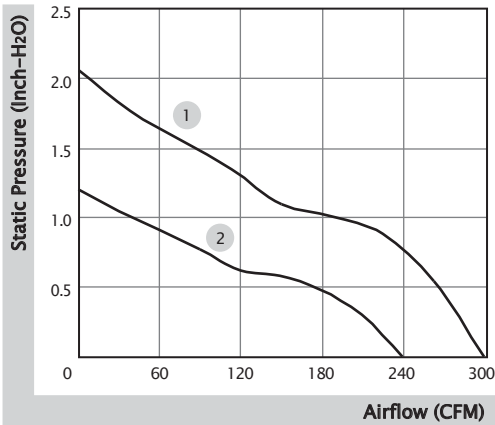

■ External Dimensions(mm)

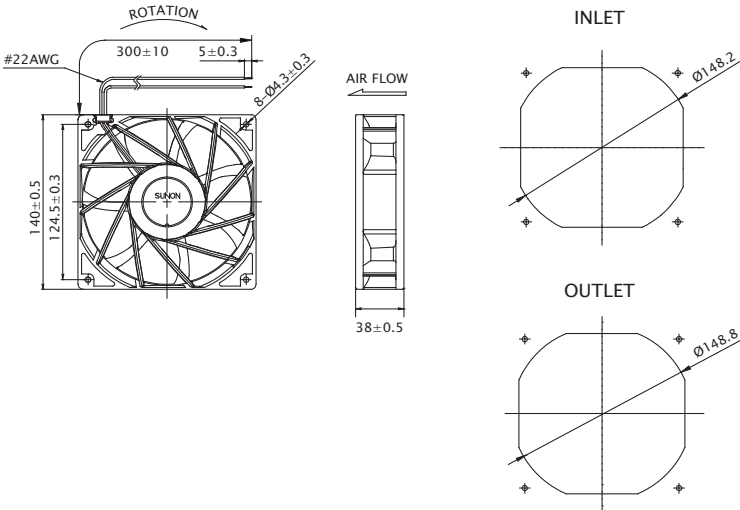

140x140x38 mm

282.6 CFM




■ Specification

Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	2BALL Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
PFE0384BX-0000-A99	☉	48	740	35.52	6600	282.6	1.88	65.9	560.0	1

■ Function R Type : F99 / F Type : G99 / PWM : H99, Q99, S99

■ Air Flow-Static Pressure Characteristics

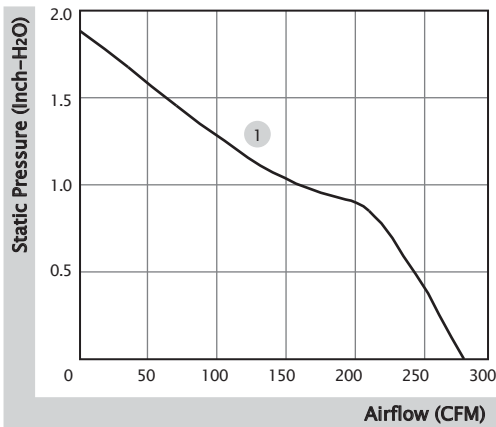

■ External Dimensions(mm)

