

120x120x38 mm

93.0~138.0 CFM




#### ■ Specification


| Model               | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|---------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                     | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| EFC0381B1-10000-A9H | ☉            | 12            | 355           | 4.26              | 3700  | 138.0   | 0.40                    | 48.0    | 248.0  | 1     |
| EFC0381B2-10000-A9H | ☉            | 12            | 245           | 2.94              | 3100  | 116.0   | 0.29                    | 43.2    | 248.0  | 2     |
| EFC0381B3-10000-A9H | ☉            | 12            | 125           | 1.50              | 2400  | 93.0    | 0.19                    | 36.0    | 248.0  | 3     |
| EFC0382B1-10000-A9H | ☉            | 24            | 195           | 4.68              | 3700  | 138.0   | 0.40                    | 48.0    | 248.0  | 1     |
| EFC0382B2-10000-A9H | ☉            | 24            | 135           | 3.24              | 3100  | 116.0   | 0.29                    | 43.2    | 248.0  | 2     |
| EFC0382B3-10000-A9H | ☉            | 24            | 75            | 1.80              | 2400  | 93.0    | 0.19                    | 36.0    | 248.0  | 3     |

■ Function R Type : F9H / F Type : G9H / PWM : H9H, Q9H, S9H

#### ■ Air Flow-Static Pressure Characteristics

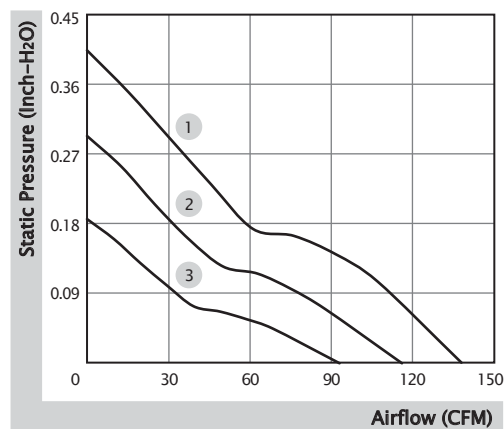

#### ■ External Dimensions(mm)

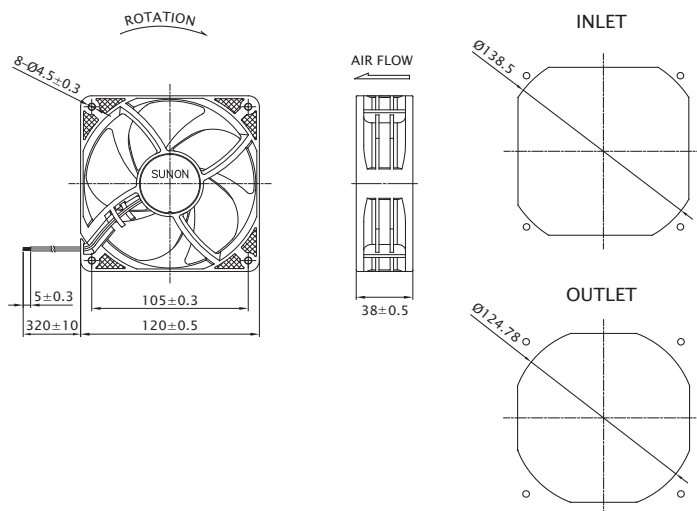

140x140x38 mm

238.5~297.9 CFM




■ Specification


| Model              | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|--------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                    | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| PFE0381BX-0000-A99 | ☉            | 12            | 3300          | 39.60             | 6800  | 297.9   | 2.05                    | 68.3    | 472.0  | 1     |
| PFE0381B1-0000-A99 | ☉            | 12            | 1720          | 20.64             | 5500  | 238.5   | 1.20                    | 62.0    | 472.0  | 2     |

■ Function    R Type : F99   /   F Type : G99   /   PWM : H99, Q99, S99

■ Air Flow-Static Pressure Characteristics

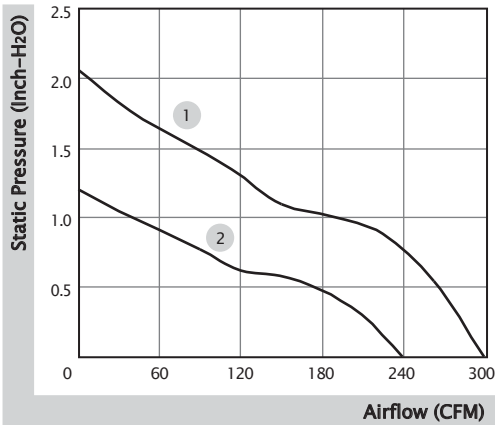

■ External Dimensions(mm)

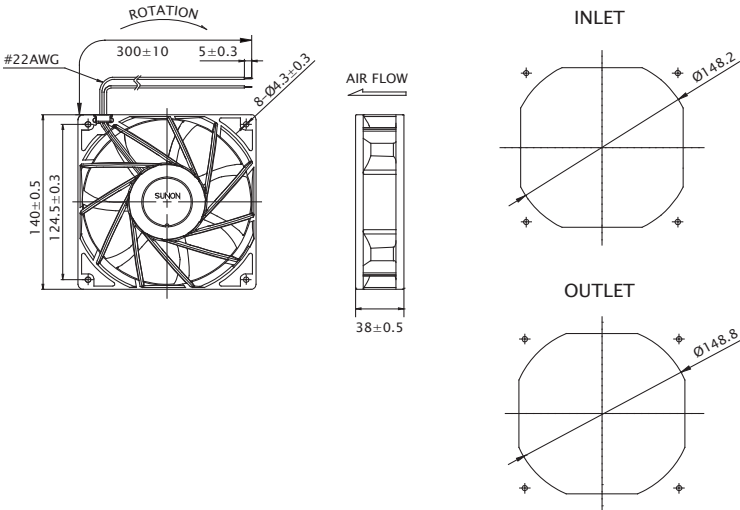

140x140x38 mm

282.6 CFM




■ Specification

| Model              | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|--------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                    | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| PFE0384BX-0000-A99 | ☉            | 48            | 740           | 35.52             | 6600  | 282.6   | 1.88                    | 65.9    | 560.0  | 1     |

■ Function    R Type : F99   /   F Type : G99   /   PWM : H99, Q99, S99

■ Air Flow-Static Pressure Characteristics

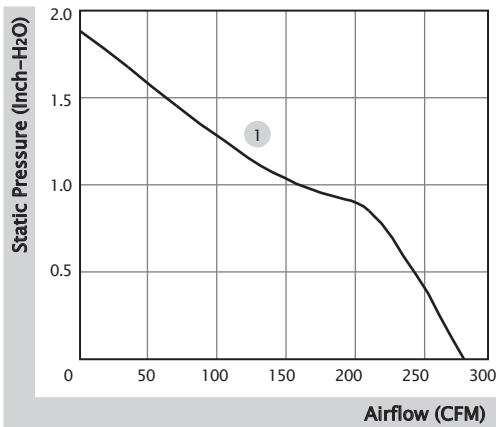

■ External Dimensions(mm)

