

# 80x80x25 mm (IP56)

33.0~60.0 CFM




## ■ Specification


| Model              | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|--------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                    | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| GF80251B1-000U-AC9 | ☼            | 12            | 330           | 3.96              | 4800  | 60.0    | 0.41                    | 47.5    | 105.0  | 1     |
| GF80251B2-000U-AC9 | ☼            | 12            | 255           | 3.06              | 4500  | 57.0    | 0.35                    | 46.0    | 105.0  | 2     |
| GF80251B3-000U-AC9 | ☼            | 12            | 200           | 2.40              | 4200  | 53.0    | 0.30                    | 44.5    | 105.0  | 3     |
| GF80251B5-000U-AC9 | ☼            | 12            | 145           | 1.74              | 3200  | 41.0    | 0.18                    | 33.0    | 87.0   | 4     |
| GF80251B6-000U-AC9 | ☼            | 12            | 120           | 1.44              | 2900  | 37.0    | 0.15                    | 30.0    | 87.0   | 5     |
| GF80251B7-000U-AC9 | ☼            | 12            | 84            | 1.01              | 2600  | 33.0    | 0.11                    | 28.0    | 87.0   | 6     |
| GE80252B1-000U-AC9 | ☼            | 24            | 200           | 4.80              | 4800  | 60.0    | 0.41                    | 47.5    | 105.0  | 1     |
| GE80252B2-000U-AC9 | ☼            | 24            | 166           | 3.99              | 4500  | 57.0    | 0.35                    | 46.0    | 105.0  | 2     |
| GE80252B3-000U-AC9 | ☼            | 24            | 137           | 3.29              | 4200  | 53.0    | 0.30                    | 44.5    | 105.0  | 3     |
| GF80252B5-000U-AC9 | ☼            | 24            | 73            | 1.76              | 3200  | 41.0    | 0.18                    | 33.0    | 87.0   | 4     |
| GF80252B6-000U-AC9 | ☼            | 24            | 59            | 1.42              | 2900  | 37.0    | 0.15                    | 30.0    | 87.0   | 5     |
| GF80252B7-000U-AC9 | ☼            | 24            | 45            | 1.08              | 2600  | 33.0    | 0.11                    | 28.0    | 87.0   | 6     |

■ Function (Speed 1, 2, 3) R Type : FC9 / F Type : GC9 / PWM : HC9, QC9, SC9  
(Speed 5, 6, 7) R Type : FC9 / F Type : GC9

## ■ Air Flow-Static Pressure Characteristics

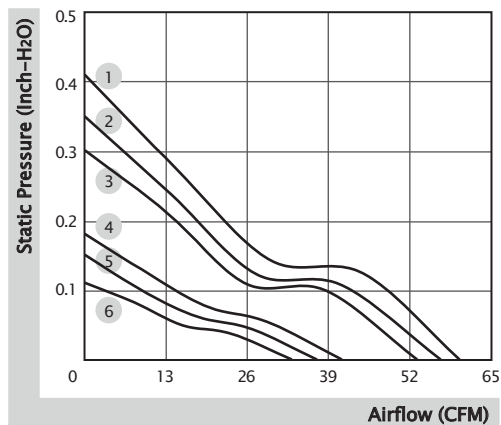

## ■ External Dimensions(mm)

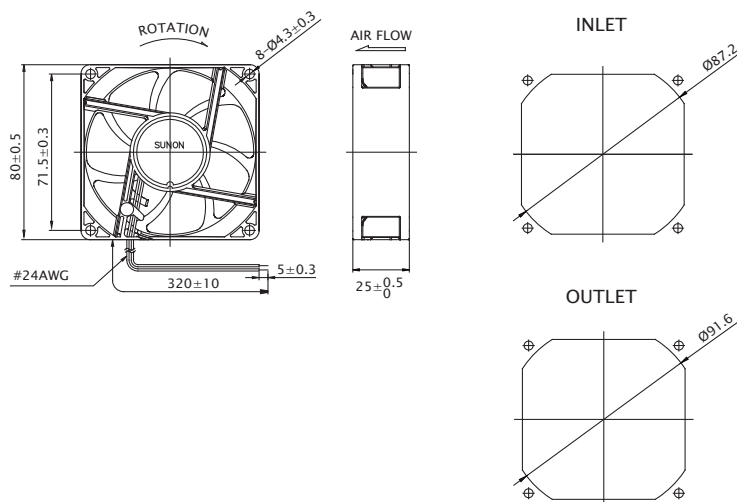

※ All model could be customized. Please contact with Sunon Sales.

※ Specifications are subject to change without notice. Please Visit SUNON website at [www.sunon.com](http://www.sunon.com) for update information.