



80x80x25 mm

45.0 CFM




■ Specification


| Model               | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|---------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                     | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| EF80251BX-10000-A99 | ☉            | 12            | 122           | 1.47              | 3600  | 45.0    | 0.23                    | 36.1    | 89.0   | 1     |
| EF80252BX-10000-A99 | ☉            | 24            | 71            | 1.71              | 3600  | 45.0    | 0.23                    | 36.1    | 89.0   | 1     |

■ Function    R Type : F99   /   F Type : G99   /   PWM : H99, Q99, S99

■ Air Flow-Static Pressure Characteristics

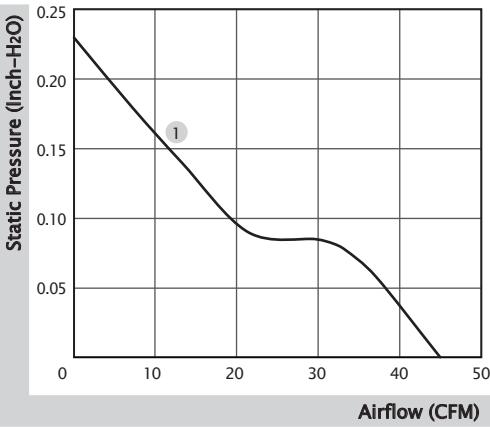

■ External Dimensions(mm)

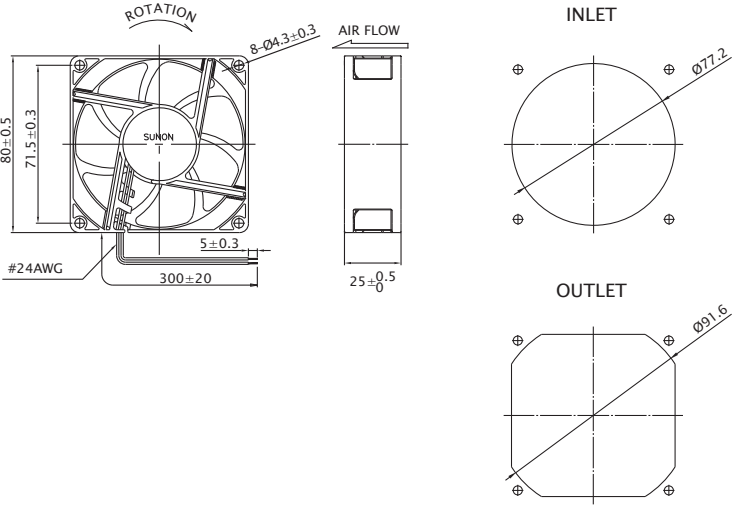

# 80x80x25 mm (GR487)

33.0~41.0 CFM




## ■ Specification

| Model              | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|--------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                    | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| GF80251B5-0000-AD9 | ☼            | 12            | 145           | 1.74              | 3200  | 41.0    | 0.18                    | 33.0    | 87.0   | 1     |
| GF80251B6-0000-AD9 | ☼            | 12            | 120           | 1.44              | 2900  | 37.0    | 0.15                    | 30.0    | 87.0   | 2     |
| GF80251B7-0000-AD9 | ☼            | 12            | 84            | 1.01              | 2600  | 33.0    | 0.11                    | 28.0    | 87.0   | 3     |
| GF80252B5-0000-AD9 | ☼            | 24            | 73            | 1.76              | 3200  | 41.0    | 0.18                    | 33.0    | 87.0   | 1     |
| GF80252B6-0000-AD9 | ☼            | 24            | 59            | 1.42              | 2900  | 37.0    | 0.15                    | 30.0    | 87.0   | 2     |
| GF80252B7-0000-AD9 | ☼            | 24            | 45            | 1.08              | 2600  | 33.0    | 0.11                    | 28.0    | 87.0   | 3     |

■ Function R Type : FD9 / F Type : GD9

## ■ Air Flow-Static Pressure Characteristics

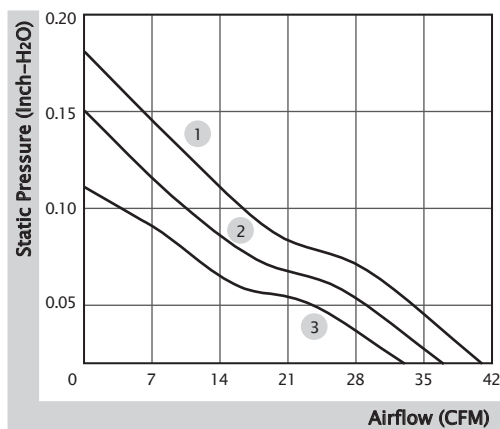

## ■ External Dimensions(mm)

