

40x40x28 mm (IP68 / GR487)

14.1~23.9 CFM




■ Specification


Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	2BALL Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
GF40282BX-10000-AEP	☼	24	400	9.60	17600	23.9	2.01	58.5	46.0	1
GF40282B1-10000-AEP	☼	24	230	5.52	14600	19.6	1.38	52.8	46.0	2
GF40282B2-10000-AEP	☼	24	180	4.32	13100	17.7	1.11	50.0	46.0	3
GF40282B3-10000-AEP	☼	24	117	2.81	10500	14.1	0.71	45.0	46.0	4
GF40282BX-10000-ADP	☼	24	400	9.60	17600	23.9	2.01	58.5	46.0	1
GF40282B1-10000-ADP	☼	24	230	5.52	14600	19.6	1.38	52.8	46.0	2
GF40282B2-10000-ADP	☼	24	180	4.32	13100	17.7	1.11	50.0	46.0	3
GF40282B3-10000-ADP	☼	24	117	2.81	10500	14.1	0.71	45.0	46.0	4

■ Function (IP68) R Type : FEP / F Type : GEP / PWM : HEP, QEP, SEP
(GR487) R Type : FDP / F Type : GDP / PWM : HDP, QDP, SDP

■ Air Flow-Static Pressure Characteristics

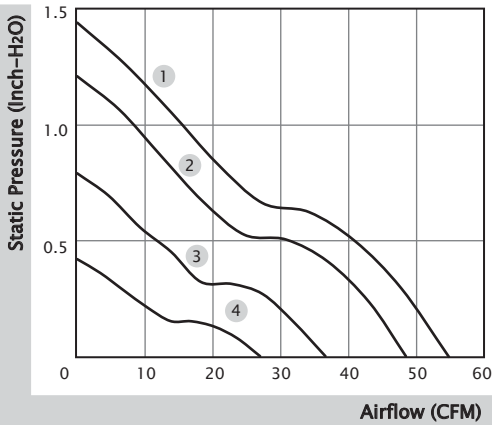


■ External Dimensions(mm)

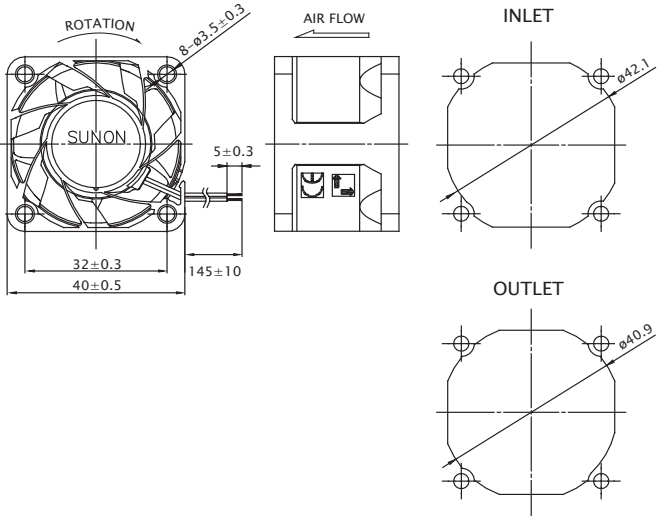

40x40x56 mm

26.9~31.7 CFM




■ Specification


Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	2BALL Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
PF40561BX-10000-A9H	☉	12	1390	16.68	21500/18000	31.7	3.76	65.9	87.0	1
PF40561B1-10000-A9H	☉	12	890	10.68	18000/15000	26.9	2.64	62.3	87.0	2

■ Function R Type : F9H / F Type : G9H / PWM : H9H, Q9H, S9H

■ External dimensions(mm)

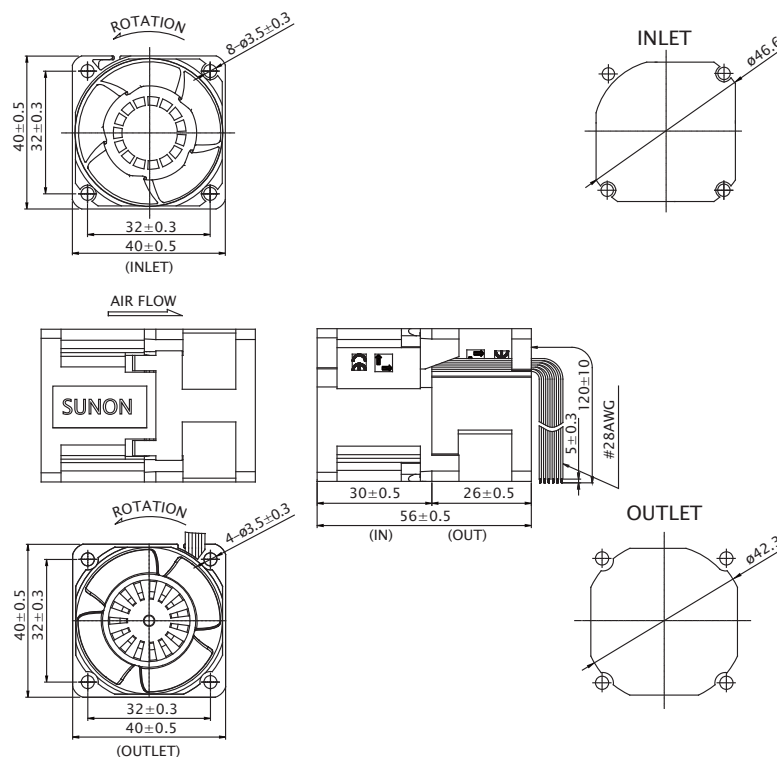

■ Air Flow-Static Pressure Characteristics

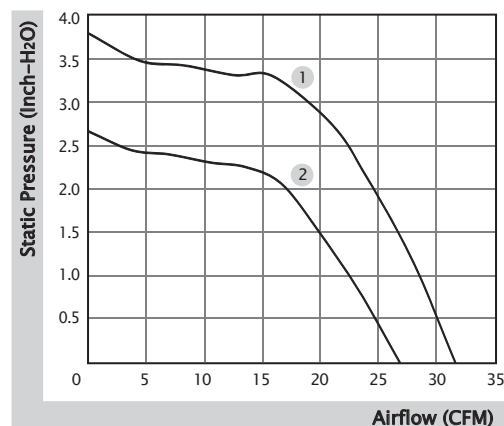

40x40x56 mm

19.7~25.0 CFM




■ Specification

Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	2BALL Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
VG40561BX-0000-A9H	☉	12	1400	16.80	25500/22300	25.0	6.19	65.0	87.0	1
VG40561B1-0000-A9H	☉	12	750	9.00	20400/17800	19.7	4.16	62.5	87.0	2

■ Function F Type : G9H / PWM : S9H

■ Air Flow-Static Pressure Characteristics

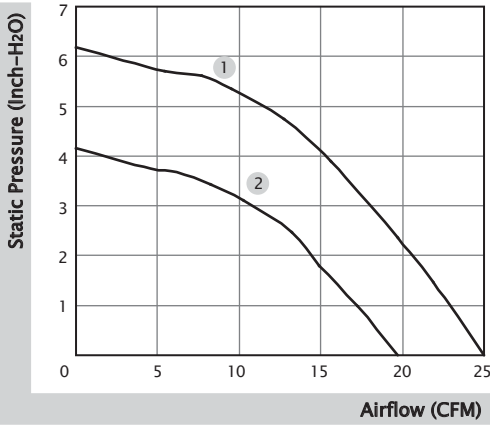

■ External Dimensions(mm)

