

# 80x80x25 mm (GR487)

33.0~41.0 CFM




## ■ Specification



| Model              | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|--------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                    | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| GF80251B5-0000-AD9 | ☼            | 12            | 145           | 1.74              | 3200  | 41.0    | 0.18                    | 33.0    | 87.0   | 1     |
| GF80251B6-0000-AD9 | ☼            | 12            | 120           | 1.44              | 2900  | 37.0    | 0.15                    | 30.0    | 87.0   | 2     |
| GF80251B7-0000-AD9 | ☼            | 12            | 84            | 1.01              | 2600  | 33.0    | 0.11                    | 28.0    | 87.0   | 3     |
| GF80252B5-0000-AD9 | ☼            | 24            | 73            | 1.76              | 3200  | 41.0    | 0.18                    | 33.0    | 87.0   | 1     |
| GF80252B6-0000-AD9 | ☼            | 24            | 59            | 1.42              | 2900  | 37.0    | 0.15                    | 30.0    | 87.0   | 2     |
| GF80252B7-0000-AD9 | ☼            | 24            | 45            | 1.08              | 2600  | 33.0    | 0.11                    | 28.0    | 87.0   | 3     |

■ Function R Type : FD9 / F Type : GD9

## ■ Air Flow-Static Pressure Characteristics

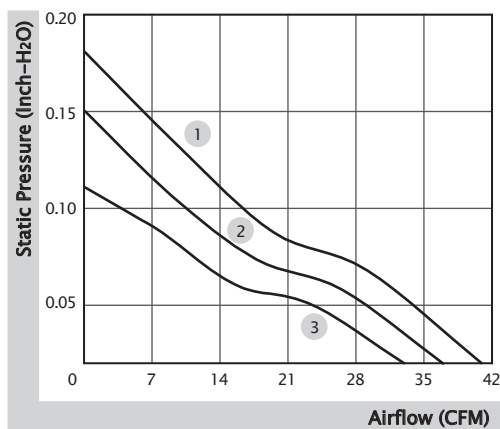

## ■ External Dimensions(mm)

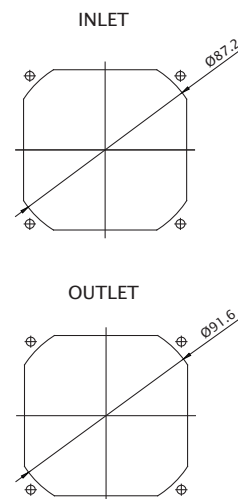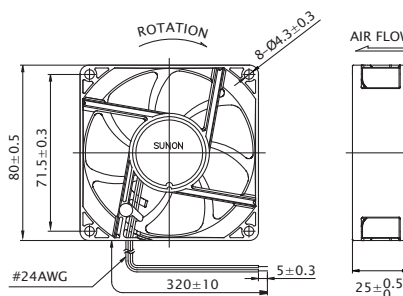

# 80x80x32 mm (IP56/IP68)

## 50.3~59.4 CFM




### ■ Specification


| Model              | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|--------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                    | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| GF80321B1-0000-AC9 | ☼            | 12            | 310           | 3.72              | 4800  | 59.4    | 0.36                    | 45.2    | 109.0  | 1     |
| GF80321B2-0000-AC9 | ☼            | 12            | 230           | 2.76              | 4500  | 55.9    | 0.32                    | 43.1    | 109.0  | 2     |
| GF80321B3-0000-AC9 | ☼            | 12            | 190           | 2.28              | 4100  | 50.3    | 0.27                    | 41.1    | 109.0  | 3     |
| GF80321B1-0000-AE9 | ☼            | 12            | 310           | 3.72              | 4800  | 59.4    | 0.36                    | 45.2    | 109.0  | 1     |
| GF80321B2-0000-AE9 | ☼            | 12            | 230           | 2.76              | 4500  | 55.9    | 0.32                    | 43.1    | 109.0  | 2     |
| GF80321B3-0000-AE9 | ☼            | 12            | 190           | 2.28              | 4100  | 50.3    | 0.27                    | 41.1    | 109.0  | 3     |

■ Function (IP56) R Type : FC9 / F Type : GC9 / PWM : HC9, QC9, SC9  
 (IP68) R Type : FE9 / F Type : GE9 / PWM : HE9, QE9, SE9

### ■ Air Flow-Static Pressure Characteristics

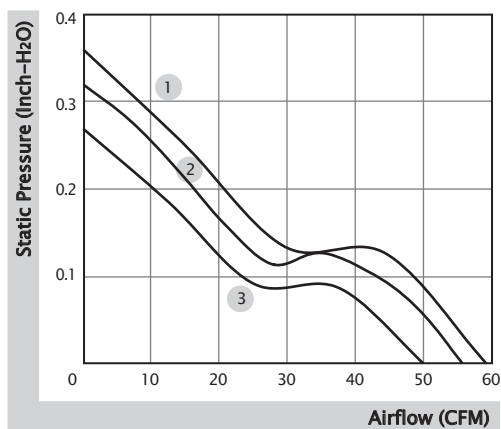

### ■ External Dimensions(mm)

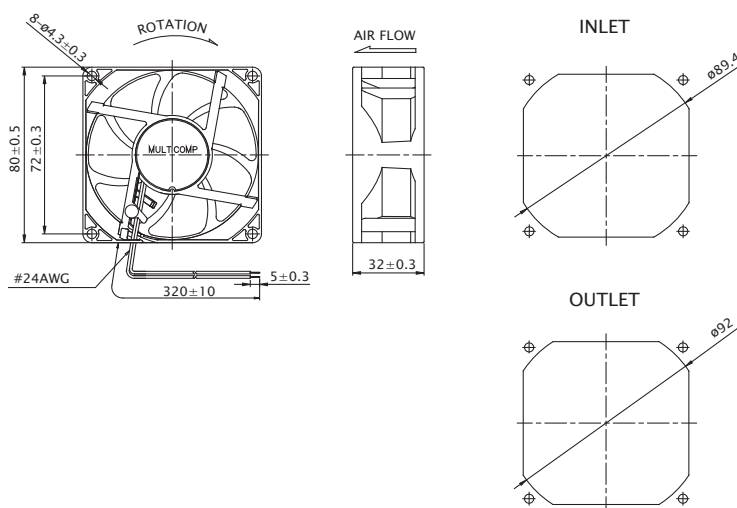

# 80x80x38 mm (IP68/GR487)

104.5~132.9 CFM




## ■ Specification

| Model               | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|---------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                     | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| GF80382BX-10000-AEP | ☼            | 24            | 1630          | 39.12             | 10000 | 132.9   | 1.80                    | 65.2    | 235.0  | 1     |
| GF80382B1-10000-AEP | ☼            | 24            | 860           | 20.64             | 8000  | 104.5   | 1.13                    | 59.7    | 235.0  | 2     |
| GF80382BX-10000-ADP | ☼            | 24            | 1630          | 39.12             | 10000 | 132.9   | 1.80                    | 65.2    | 235.0  | 1     |
| GF80382B1-10000-ADP | ☼            | 24            | 860           | 20.64             | 8000  | 104.5   | 1.13                    | 59.7    | 235.0  | 2     |

■ Function (IP68) R Type : FEP / F Type : GEP / PWM : HEP, QEP, SEP  
(GR487) R Type : FDP / F Type : GDP / PWM : HDP, QDP, SDP

## ■ Air Flow-Static Pressure Characteristics

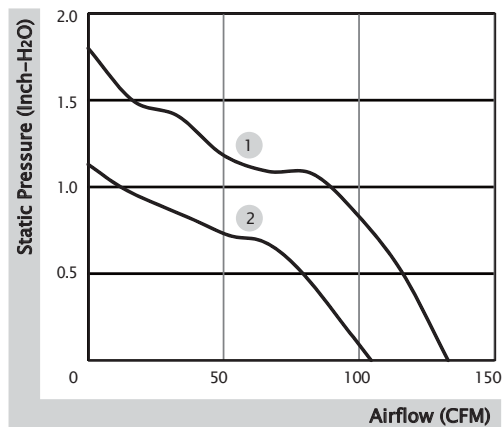

## ■ External Dimensions(mm)

