

# 92x92x25 mm (IP68)

39.5~75.0 CFM




## ■ Specification


| Model              | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|--------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                    | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| GF92251B1-0000-AE9 | ☉            | 12            | 393           | 4.72              | 4500  | 75.0    | 0.35                    | 47.0    | 113.0  | 1     |
| GF92251B2-0000-AE9 | ☉            | 12            | 300           | 3.60              | 4200  | 70.0    | 0.30                    | 45.0    | 113.0  | 2     |
| GF92251B3-0000-AE9 | ☉            | 12            | 230           | 2.76              | 3900  | 65.0    | 0.25                    | 43.0    | 113.0  | 3     |
| GF92251B5-0000-AE9 | ☉            | 12            | 165           | 1.98              | 3000  | 51.5    | 0.15                    | 34.0    | 99.0   | 4     |
| GF92251B6-0000-AE9 | ☉            | 12            | 135           | 1.62              | 2700  | 45.0    | 0.13                    | 32.0    | 99.0   | 5     |
| GF92251B7-0000-AE9 | ☉            | 12            | 91            | 1.10              | 2400  | 39.5    | 0.10                    | 28.0    | 99.0   | 6     |
| GE92252B1-0000-AE9 | ☉            | 24            | 220           | 5.28              | 4500  | 75.0    | 0.35                    | 47.0    | 113.0  | 1     |
| GE92252B2-0000-AE9 | ☉            | 24            | 180           | 4.32              | 4200  | 70.0    | 0.30                    | 45.0    | 113.0  | 2     |
| GE92252B3-0000-AE9 | ☉            | 24            | 155           | 3.72              | 3900  | 65.0    | 0.25                    | 43.0    | 113.0  | 3     |
| GF92252B5-0000-AE9 | ☉            | 24            | 87            | 2.09              | 3000  | 51.5    | 0.15                    | 34.0    | 99.0   | 4     |
| GF92252B6-0000-AE9 | ☉            | 24            | 65            | 1.56              | 2700  | 45.0    | 0.13                    | 32.0    | 99.0   | 5     |
| GF92252B7-0000-AE9 | ☉            | 24            | 47            | 1.13              | 2400  | 39.5    | 0.10                    | 28.0    | 99.0   | 6     |

■ Function (Speed 1, 2, 3) R Type : FE9 / F Type : GE9 / PWM : HE9, QE9, SE9  
(Speed 4, 5, 6) R Type : FE9 / F Type : GE9

## ■ Air Flow-Static Pressure Characteristics

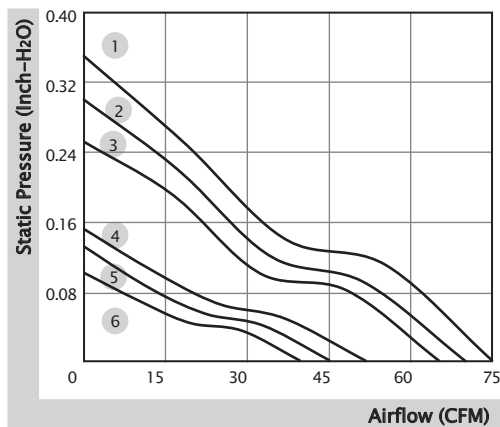

## ■ External Dimensions(mm)

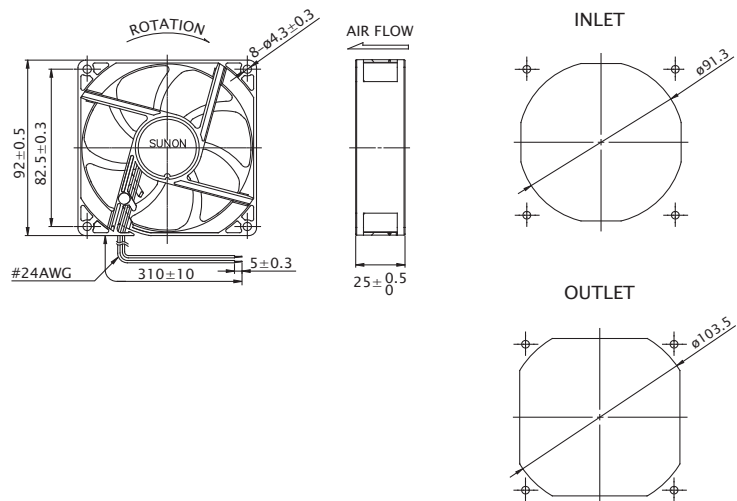

# 92x92x25 mm (GR487)

39.5~51.5 CFM




■ Specification


| Model              | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|--------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                    | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| GF92251B5-0000-AD9 | ☼            | 12            | 165           | 1.98              | 3000  | 51.5    | 0.15                    | 34.0    | 99.0   | 1     |
| GF92251B6-0000-AD9 | ☼            | 12            | 135           | 1.62              | 2700  | 45.0    | 0.13                    | 32.0    | 99.0   | 2     |
| GF92251B7-0000-AD9 | ☼            | 12            | 91            | 1.10              | 2400  | 39.5    | 0.10                    | 28.0    | 99.0   | 3     |
| GF92252B5-0000-AD9 | ☼            | 24            | 87            | 2.09              | 3000  | 51.5    | 0.15                    | 34.0    | 99.0   | 1     |
| GF92252B6-0000-AD9 | ☼            | 24            | 65            | 1.56              | 2700  | 45.0    | 0.13                    | 32.0    | 99.0   | 2     |
| GF92252B7-0000-AD9 | ☼            | 24            | 47            | 1.13              | 2400  | 39.5    | 0.10                    | 28.0    | 99.0   | 3     |

■ Function    R Type : FD9    /    F Type : GD9

■ Air Flow-Static Pressure Characteristics

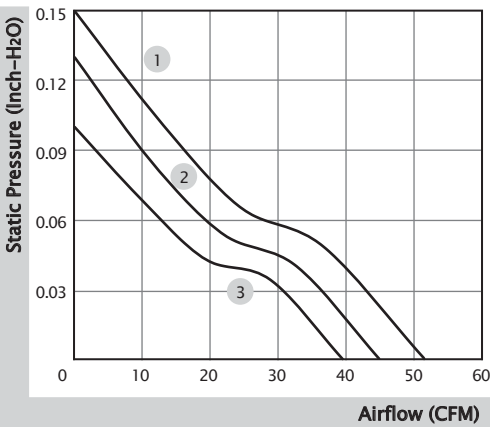

■ External Dimensions(mm)

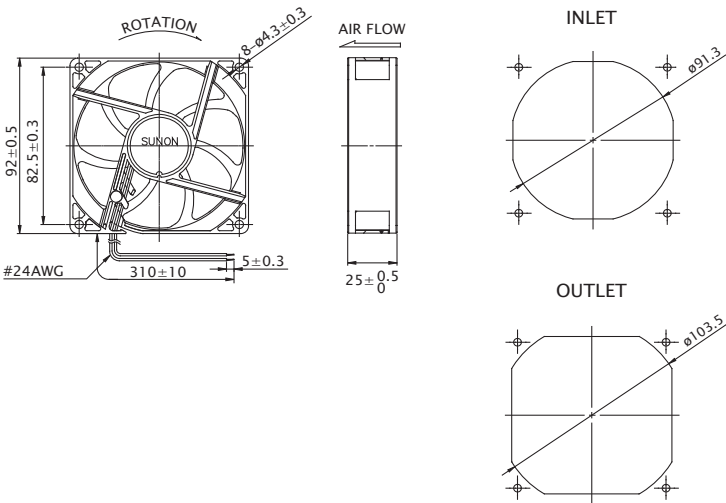

# 92x92x38 mm (IP68/GR487)

145.3~172.9 CFM




## ■ Specification

| Model               | Bearing      | Rated Voltage | Power Current | Power Consumption | Speed | Airflow | Static Pressure         | Noise   | Weight | Curve |
|---------------------|--------------|---------------|---------------|-------------------|-------|---------|-------------------------|---------|--------|-------|
|                     | 2BALL Sleeve | (VDC)         | (mA)          | (WATTS)           | (RPM) | (CFM)   | (inch-H <sub>2</sub> O) | (dB(A)) | (g)    |       |
| GF92382BX-10000-AEP | ☼            | 24            | 1700          | 40.80             | 9000  | 172.9   | 1.73                    | 66.8    | 260.0  | 1     |
| GF92382B1-10000-AEP | ☼            | 24            | 850           | 20.40             | 7200  | 145.3   | 1.20                    | 60.6    | 260.0  | 2     |
| GF92382BX-10000-ADP | ☼            | 24            | 1700          | 40.80             | 9000  | 172.9   | 1.73                    | 66.8    | 260.0  | 1     |
| GF92382B1-10000-ADP | ☼            | 24            | 850           | 20.40             | 7200  | 145.3   | 1.20                    | 60.6    | 260.0  | 2     |

■ Function (IP68) R Type : FEP / F Type : GEP / PWM : HEP, QEP, SEP  
(GR487) R Type : FDP / F Type : GDP / PWM : HDP, QDP, SDP

## ■ Air Flow-Static Pressure Characteristics

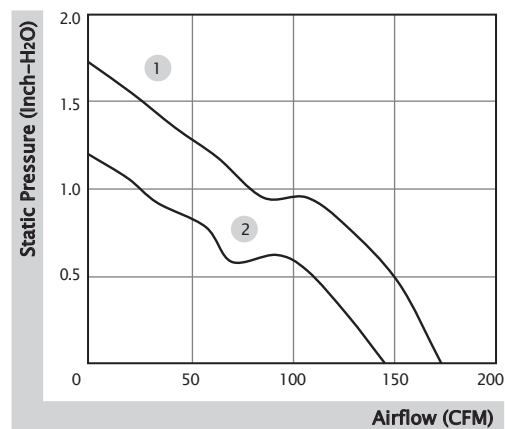

## ■ External Dimensions(mm)

