

92x92x38 mm (IP68/GR487)

145.3~172.9 CFM




■ Specification


Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	2BALL Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
GF92382BX-10000-AEP	☼	24	1700	40.80	9000	172.9	1.73	66.8	260.0	1
GF92382B1-10000-AEP	☼	24	850	20.40	7200	145.3	1.20	60.6	260.0	2
GF92382BX-10000-ADP	☼	24	1700	40.80	9000	172.9	1.73	66.8	260.0	1
GF92382B1-10000-ADP	☼	24	850	20.40	7200	145.3	1.20	60.6	260.0	2

■ Function (IP68) R Type : FEP / F Type : GEP / PWM : HEP, QEP, SEP
(GR487) R Type : FDP / F Type : GDP / PWM : HDP, QDP, SDP

■ Air Flow-Static Pressure Characteristics

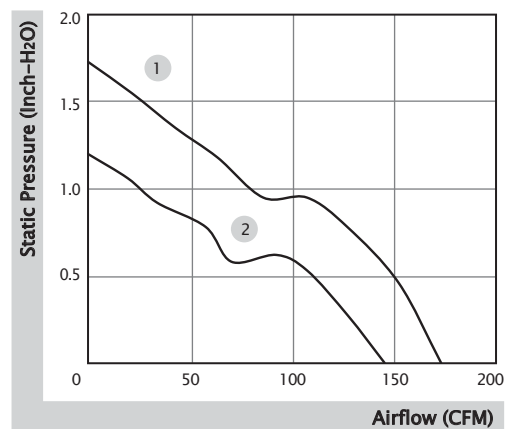

■ External Dimensions(mm)

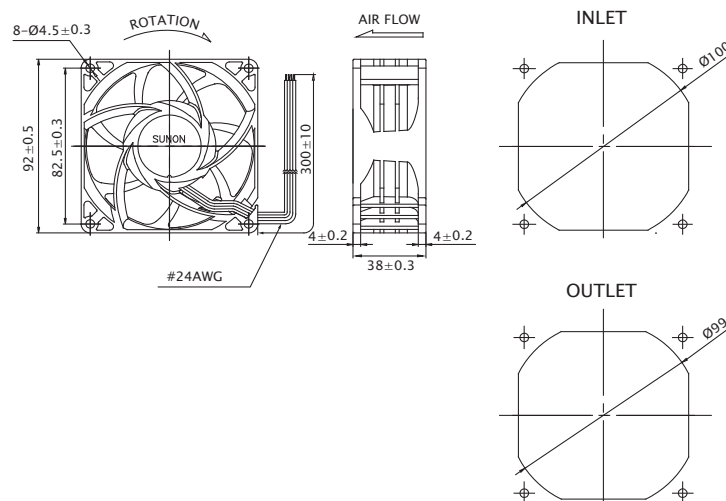

92x92x38 mm

138.1~182.4 CFM




■ Specification


Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	2BALL Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
PF92381BX-10000-A9H	☉	12	4200	50.40	12000	182.4	2.94	70.2	227.0	1
PF92381B1-10000-A9H	☉	12	1850	22.20	9300	138.1	1.95	62.9	227.0	2

■ Function R Type : F9H / F Type : G9H / PWM : H9H, Q9H, S9H

■ Air Flow-Static Pressure Characteristics

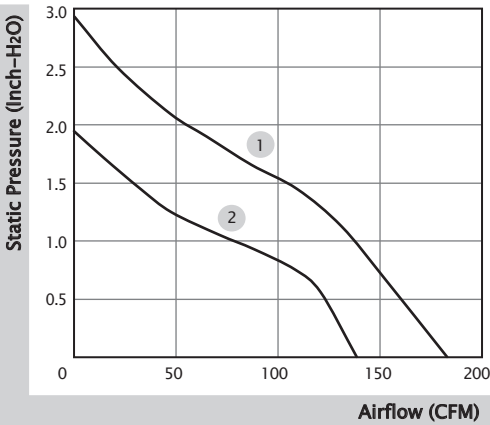

■ External Dimensions(mm)

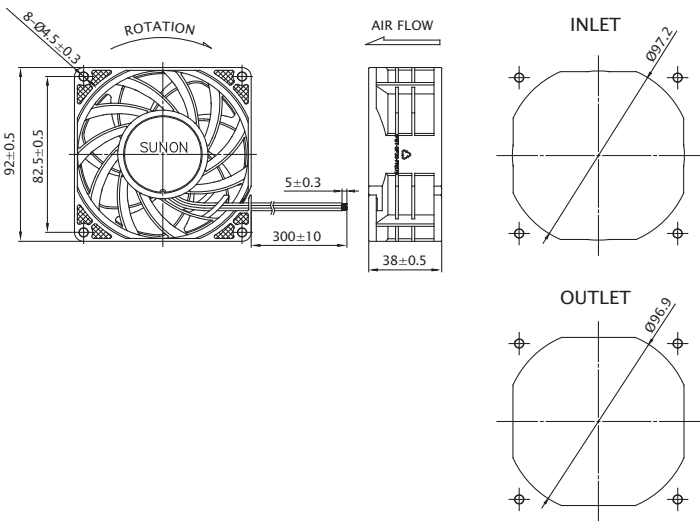

92x92x38 mm

91.7~120.2 CFM




■ Specification

Model	Bearing	Rated Voltage	Power Current	Power Consumption	Speed	Airflow	Static Pressure	Noise	Weight	Curve
	2BALL Sleeve	(VDC)	(mA)	(WATTS)	(RPM)	(CFM)	(inch-H ₂ O)	(dB(A))	(g)	
PF92381B2-10000-A9H	☼	12	935	11.22	5800	120.2	0.72	54.7	202.0	1
PF92381B3-10000-A9H	☼	12	485	5.82	4700	91.7	0.51	49.5	202.0	2
PF92382B2-10000-A9H	☼	24	480	11.52	5800	120.2	0.72	54.7	190.0	1
PF92382B3-10000-A9H	☼	24	250	6.00	4700	91.7	0.51	49.5	190.0	2

■ Function R Type : F9H / F Type : G9H / PWM : H9H, Q9H, S9H

■ Air Flow-Static Pressure Characteristics

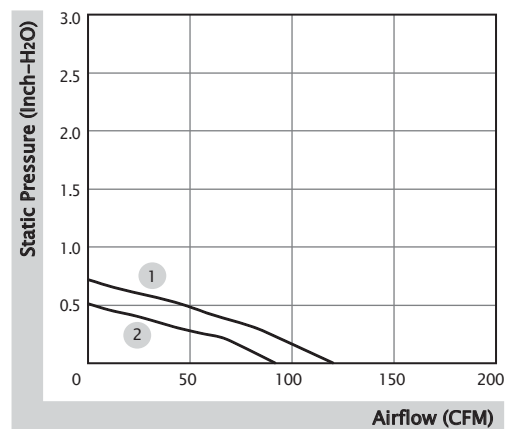

■ External Dimensions(mm)

