

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd

Phone +86 10-62547612

zhangyu@bjhengrui.cn

en.bjhengrui.com

Nominal data

Type	K3G560-PC10-L1	
Motor	M3G150-NA	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min ⁻¹	1860
Power consumption	W	5950
Current draw	A	9.2
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment

Subject to change

Data according to Commission Regulation (EU) 327/2011 (prEN 17166)

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	67.4	59.6	09 Power consumption P_{ed}	kW	5.93
02 Measurement category		A		09 Air flow q_v	m ³ /h	13035
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	1070
04 Efficiency grade N		69.8	62	10 Speed (rpm) n	min ⁻¹	1860
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.

* Specific ratio = $1 + p_b / 100\,000\text{ Pa}$

LU-207810

The efficiency values displayed for achieving conformity with the Ecodesign Regulation EU 327/2011 has been reached with defined air duct components (e.g. inlet rings). The dimensions must be requested from ebm-papst. If other air conduction geometries are used on the installation side, the ebm-papst evaluation loses its validity/the conformity must be confirmed again. The product does not fall within the scope of Regulation (EU) 2019/1781 due to the exception specified in Article 2 (2a) (motors completely integrated into a product).

Technical description

Weight	64 kg
Size	560 mm
Motor size	150
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	Sheet aluminum
Support plate material	Sheet steel, galvanized
Support bracket material	Steel, painted black
Inlet nozzle material	Sheet steel, galvanized
Number of blades	5
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	See legend on product drawing
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display with LED - External 15-50 VDC input (parameterization) - Alarm relay - Integrated PI controller - Configurable inputs/outputs (I/O) - MODBUS V6.3 - Motor current limitation - RS-485 MODBUS-RTU - Soft start - Voltage output 3.3-24 VDC, Pmax = 800 mW - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection - Vibration sensor
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC interference emission	According to EN 61000-6-4 (industrial environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Motor protection	Electronic motor protection

EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket


Protection class assignment	I; If a protective earth is connected by the customer This component for installation may have several local protection classes. This information relates to this component's basic design. The final protection class is based on the component's intended installation and connection.
Conformity with standards	EN 61800-5-1; CE
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; UL 1004-7 + 60730-1; EAC



EC centrifugal module - RadiPac

backward-curved, single-intake
with support bracket

Product drawing

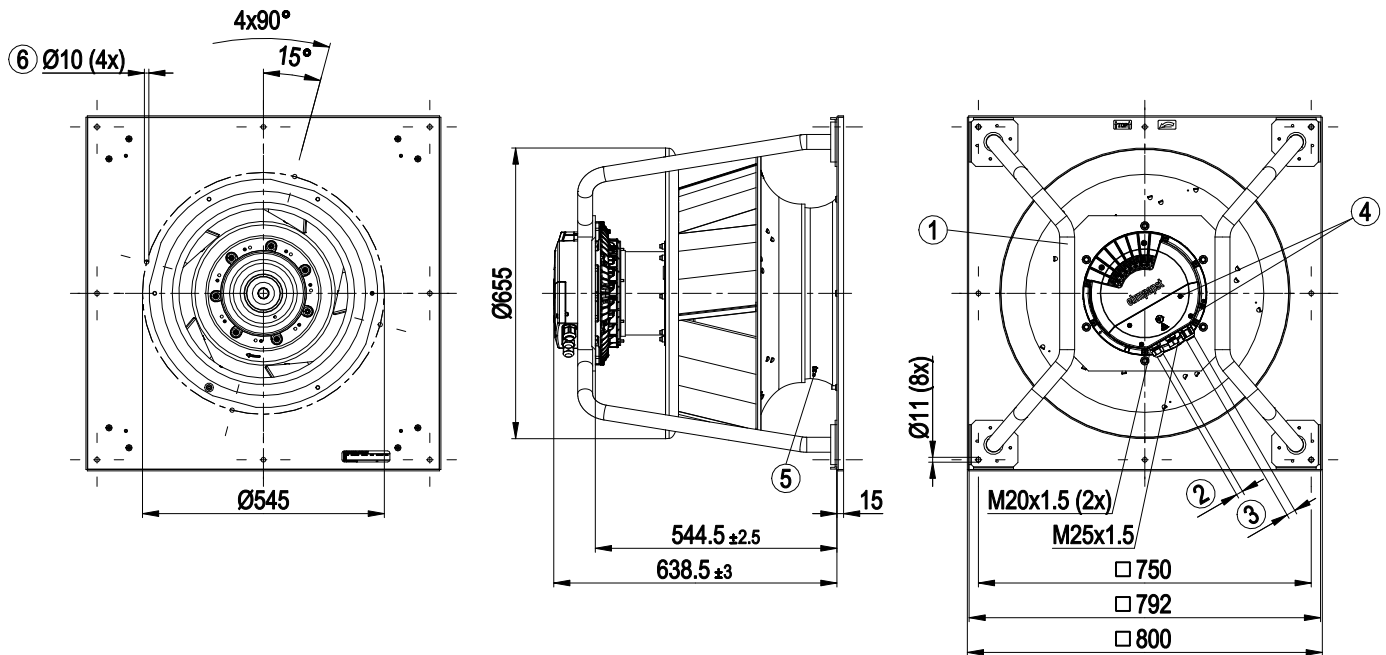


1	Installed position: shaft horizontal (install support struts only vertically as illustrated) or rotor on bottom; rotor on top on request
2	Cable diameter min. 4 mm, max. 10 mm, tightening torque 4 ± 0.6 Nm
3	Cable diameter min. 5 mm, max. 14 mm, tightening torque 6 ± 0.9 Nm
	(The tightening torque is designed for PVC cables. If the cable materials are different, the tightening torque may have to be adjusted)
4	Tightening torque 3 ± 0.3 Nm
5	Inlet ring with pressure tap (k-factor: 348)
6	Attachment holes for FlowGrid 00630-2-2957 (not included in scope of delivery)

EC centrifugal module - RadiPac

backward-curved, single-intake

with support bracket

Connection diagram

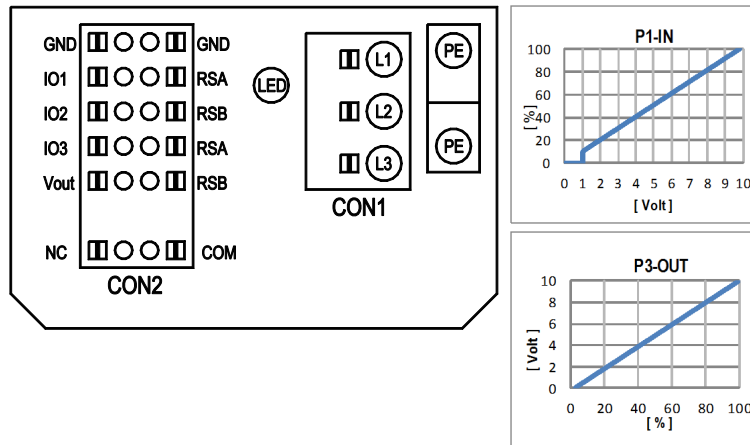

No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see "Optional interface functions" table) Factory setting: Digital input - high active, function: Disable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC - active: applied voltage 3.5-50 VDC Reset function: Triggering of error reset on change of state from "enabled" to "disabled"
	CON2	IO2	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog input 0-10 V / PWM, Ri=100 kΩ, function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN), SELV
	CON2	IO3	Function parameterizable (see "Optional interface functions" table) Factory setting: Analog output 0-10 V, max. 5 mA, function: Fan modulation level Characteristic curve parameterizable (see output characteristic curve P3-OUT), SELV
	CON2	Vout	Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve

Terminal/plug assignment

configurable IO functions: normal / inverse		MODBUS Register for IO mode configuration	electrical specification	configurable IO mode		CON2
				Din1 (active high): digital input		
IO1			active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC			
	Ain1 0-10V/PWM: analog input		RI = 100K, characteristic curve parameterizable, f _{PWM} = 1k..10kHz, SELV			
	Tach out (open collector output)		Umax = 50VDC, Imax = 20mA, SELV			
	Diagnostics out (open collector output)		Umax = 50VDC, Imax = 20mA, SELV			
IO2			active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC			
	Ain2 0-10V/PWM: analog input		RI = 100K, characteristic curve parameterizable, f _{PWM} = 1k..10kHz, SELV			
	Ain2 4-20mA: analog input		RI = 125R, characteristic curve parameterizable, SELV			
	Din3 (active high): digital input		active: applied voltage 3.5-50VDC, SELV not active: pin open or applied voltage < 1,5VDC			
IO3			active: applied voltage < 1,5VDC, SELV not active: pin open or applied voltage 3.5-50VDC			
	PWMIn3: digital input, idle level high		PWM = 40Hz - 10kHz, characteristics parameterizable active: pin open or applied voltage 3.5-50VDC not active: applied voltage < 1.5VDC, SELV			
	PWMIn3: digital input, idle level low		40Hz - 10kHz, characteristics parameterizable active: applied voltage 3.5-50VDC not active: pin open or applied voltage < 1.5VDC, SELV			
	Aout3 0-10V: analog output		function parameterizable, max. 5mA max output frequency 300Hz, SELV			
RSA RSB			0-10V/max. 5mA, max output frequency 300Hz, SELV			
	Diagnostics out (pulses)		0-10V/max. 5mA, max output frequency 300Hz, SELV			
	RS485 bus connection,		MODBUS RTU, specification V6.3, SELV			
	voltage output		voltage parameterizable 3.3...24VDC +/- 5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV			
Vout	alternatively: Input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage		15...50VDC			

D101 [...] source: set value	D147 [...] source: sensor value	D104 [...] switch: parameter set: #1 / #2	D12E [...] switch: control function: heating (pos.) cooling (neg.)	D148 [...] switch: direction of rotation: cw / ccw	D16C [...] switch: set value source	D16A [...] switch: fan enable / disable	(selected directly via IO mode)	(selected directly via IO mode)	signal: tach out	signal: diagnostics out	signal: fan modulation level %	signal: actual speed	D130 [1]	D130 [2]	D130 [5]	D00C [1] pulse output for auto-addressing	D130 [4]
INPUT										OUTPUT							

configurable option


For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.3

○ configurable option

For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.3



Curves: Air performance 50 Hz

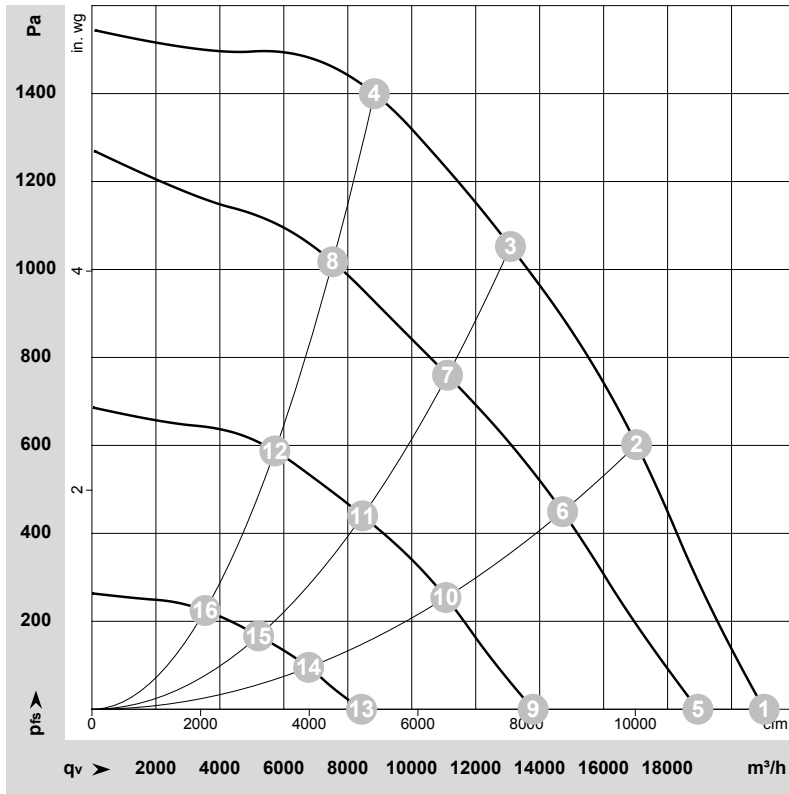

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-221584-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	LwA	q _v	P _{fs}	q _v	P _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	dB	m³/h	Pa	cfm	in. wg
1	3~	400	50	1860	3373	5.38	97	105	104	107	21025	0	12375	0.00
2	3~	400	50	1860	5029	7.81	88	94	95	97	17030	600	10025	2.41
3	3~	400	50	1860	5950	9.20	79	85	89	91	13090	1050	7705	4.22
4	3~	400	50	1860	5580	8.63	84	90	93	95	8830	1400	5200	5.62
5	3~	400	50	1685	2525	4.16	98	102	102	105	18950	0	11155	0.00
6	3~	400	50	1615	3274	5.24	81	88	90	92	14715	452	8660	1.81
7	3~	400	50	1585	3601	5.71	74	81	85	87	11120	761	6545	3.06
8	3~	400	50	1590	3449	5.49	78	86	89	90	7530	1024	4430	4.11
9	3~	400	50	1245	1108	2.25	85	91	92	94	13795	0	8120	0.00
10	3~	400	50	1220	1484	2.74	74	81	83	85	11065	256	6515	1.03
11	3~	400	50	1205	1663	3.00	68	75	79	81	8460	440	4980	1.77
12	3~	400	50	1210	1599	2.90	70	77	82	83	5720	591	3365	2.37
13	3~	400	50	770	332	0.99	69	77	78	81	8430	0	4960	0.00
14	3~	400	50	755	424	1.16	59	67	71	73	6775	96	3990	0.39
15	3~	400	50	745	462	1.23	57	64	69	70	5210	167	3065	0.67
16	3~	400	50	750	449	1.20	58	65	70	71	3535	226	2080	0.91

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
 LwA_{out} = Sound power level outlet side · q_v = Air flow · P_{fs} = Pressure increase