

R3G630-FB32-05

Stulz GmbH

EC centrifugal fan - RadiCal

backward-curved, single-intake

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd

Phone +86 10-62547612

zhangyu@bjhengrui.cn

en.bjhengrui.com

Nominal data

Type	R3G630-FB32-05	
Motor	M3G150-IF	
Phase		3~
Nominal voltage	VAC	400
Nominal voltage range	VAC	380 .. 480
Frequency	Hz	50/60
Method of obtaining data		ml
Status		prelim.
Speed (rpm)	min ⁻¹	1370
Power consumption	W	3300
Current draw	A	5.1
Min. ambient temperature	°C	-40
Max. ambient temperature	°C	40

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011

		Actual	Req. 2015
01 Overall efficiency η_{es}	%	72.6	56.9
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		77.7	62
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption P_{ed}	kW	3.27
09 Air flow q_v	m³/h	12190
09 Pressure increase p_{fs}	Pa	670
10 Speed (rpm) n	min ⁻¹	1375
11 Specific ratio*		1.01

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$


LU-190616



Technical description


Weight	0.001 kg
Size	630 mm
Motor size	150
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	PP plastic
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP55
Insulation class	"F"
Moisture (F) / Environmental (H) protection class	H1
Ambient temperature note	Occasional start-up at temperatures between -40°C and -25°C is permitted. For continuous operation at ambient temperatures below -25°C (such as refrigeration applications), use must be made of a fan design with special low-temperature bearings.
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on bottom; rotor on top on request
Condensation drainage holes	On rotor side
Mode	S1
Motor bearing	Ball bearing
Technical features	- Operation and alarm display with LED - External 15-50 VDC input (parameterization) - Alarm relay - Integrated PI controller - Configurable inputs/outputs (I/O) - MODBUS V6.0 - Motor current limitation - RFID - ISO 15693 compatible - RS-485 MODBUS-RTU - Soft start - Voltage output 3.3-24 VDC, Pmax = 800 mW - Control interface with SELV potential safely disconnected from the mains - Thermal overload protection for electronics/motor - Line undervoltage / phase failure detection
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Electrical hookup	Terminal box
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE
Approval	CSA C22.2 No. 77 + CAN/CSA-E60730-1; EAC; UL 1004-7 + 60730

Product drawing

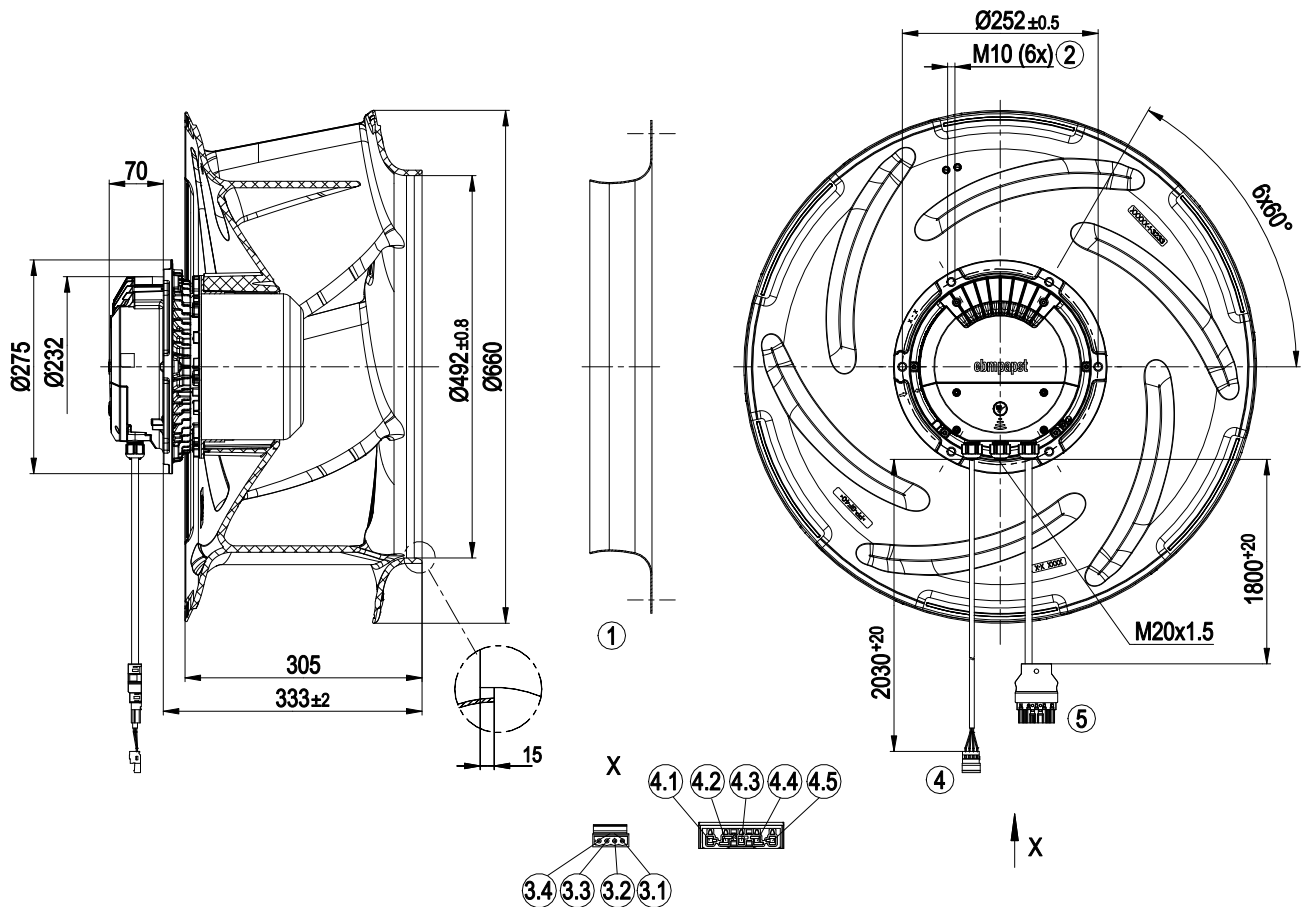

1	Accessory part: Inlet ring 63350-2-4013 not included in scope of delivery
2	Max. clearance for screw 20 mm
3	4-pole header Wago 231-604
3.1	GND
3.2	0-10 V/PWM
3.3	COM
3.4	NC
4	Plug with strain relief 5-pole Wago 0770-001/K011-0174/0000-0300
4.1	not used
4.2	PE
4.3	L1
4.4	L2
4.5	L3

Connection diagram

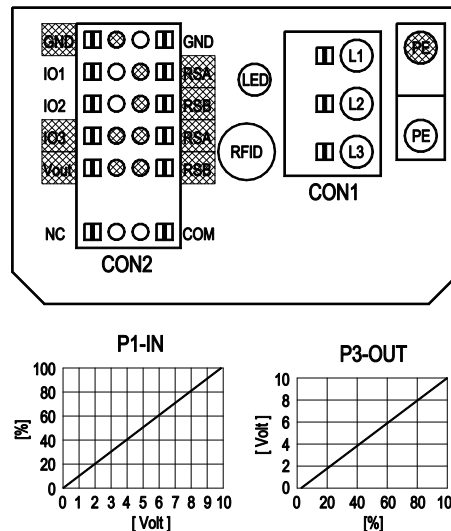

shaded gray => not brought out via leads

No.	Conn.	Designation	Function/assignment
	CON1	L1, L2, L3	Power supply, phase, see nameplate for voltage range
	PE	PE	Protective earth
	CON2	RSA	RS485 interface for MODBUS, RSA; SELV
	CON2	RSB	RS485 interface for MODBUS, RSB; SELV
	CON2	GND	Reference ground for control interface, SELV
	CON2	IO1	Function parameterizable (see table Optional interface functions) Factory setting: Digital input - high active, Function: Enable input, SELV - inactive: Pin open or applied voltage < 1.5 VDC / <0.7 VAC - active: applied voltage 3.5-50 VDC / 7-30 VAC
	CON2	IO2	Function parameterizable (see table Optional interface functions) Factory setting: Analog input 0-10 V / PWM, Ri=100 kΩ, Function: Set value Characteristic curve parameterizable (see input characteristic curve P1-IN) , SELV
	CON2	IO3	Function parameterizable (see table Optional interface functions) Factory setting: Analog output 0-10 V, max. 5 mA, Function: Fan modulation level Characteristic curve parameterizable (see output characteristic curve P3-OUT), SELV
	CON2	V out	Voltage output 3.3-24 VDC ±5%, Pmax=800 mW, voltage parameterizable Factory setting: 10 VDC short-circuit-proof, supply for external devices, SELV alternatively: 15-50 VDC input for parameterization via MODBUS without line voltage
	CON2	COM	Status relay, floating status contact, common connection, contact rating 250 VAC / 2 A (AC1) / min. 10 mA, reinforced insulation on supply side and on control interface side
	CON2	NC	Status relay, floating status contact, break for failure or n < 200 rpm
		LED	green: status = good, ready for operation orange: status = warning red: status = failure
		P1-IN	Input characteristic curve
		P3-OUT	Output characteristic curve

Terminal/plug assignment


CON2	configurable IO mode	electrical specification	configurable IO functions: normal / inverse	MODBUS Register for IO mode configuration	configurable IO											
					INPUT				OUTPUT							
I01	◦ Din1 (active high): digital input	not active: pin open or applied voltage < 1.5VDC active: applied voltage 3.5-50VDC, SELV	D158 [0]		source: set value	D101 [...]			source: sensor value	D147 [...]						
	◦ Ain1 0-10V/PWM: analog input	RI=100K, characteristic curve parameterizable, $f_{PWM}=1k..10kHz$, SELV	D158 [2]		switch: parameter set: #1 / #2	D104 [...]			switch: control function: heating (pos.), cooling (neg.)	D12E [...]						
	◦ Tach out (open collector output)	Umax=50VDC, Imax=20mA, SELV	D158 [5]		switch: direction of rotation: cw / ccw	D148 [...]			switch: set value source	D16C [...]						
	◦ Diagnostics out (open collector output)	Umax=50VDC, Imax=20mA, SELV	D158 [6]		switch: fan enable / disable	D16A [...]			signal: tach out (selected directly via IO mode)							
I02	◦ Din2 (active high): digital input	not active: pin open or applied voltage < 1.5VDC active: applied voltage 3.5-50VDC, SELV	D159 [0]		signal: diagnostics out (selected directly via IO mode)	D130 [0]			signal: fan modulation level %	D130 [0]						
	◦ Ain2 0-10V/PWM: analog input	RI=100K, characteristic curve parameterizable, $f_{PWM}=1k..10kHz$, SELV	D159 [2]		signal: actual speed	D130 [1]			signal: system modulation level %	D130 [2]						
	◦ Ain2 4-20mA: analog input	RI=125R, characteristic curve parameterizable, SELV	D159 [3]		signal: remote control output 0-10V	D130 [5]			signal: tach out (selected directly via IO mode)							
	◦ Din3 (active high): digital input	not active: pin open or applied voltage < 1.5VDC active: applied voltage 3.5-50VDC, SELV	D15A [0]		pulse input for auto-addressing	D00C [1]			pulse output for auto-addressing	D130 [4]						
I03	◦ Din3 (active low): digital input	not active: pin open or applied voltage < 1.5VDC active: applied voltage 3.5-50VDC, SELV	D15A [1]													
	◦ PWMIn3: digital input	not active: applied voltage < 1.5VDC, SELV 40Hz - 10kHz, characteristics parameterizable	D15A [7]													
	◦ Aout3 0-10V: analog output	not active: pin open or applied voltage 3.5-50VDC active: applied voltage < 1.5VDC, SELV	D15A [4]													
	◦ Tacho out (pulses), analog output	function parameterizable, max. 5mA, max output frequency 300Hz, SELV	D15A [5]													
RSA RSB	◦ Diagnostics out (pulses)	0-10V max. 5mA, max output frequency 300Hz, SELV	D15A [6]													
	RS485 bus connection,	MODBUS RTU, specification V6.0, SELV														
Yout	voltage output	voltage parameterizable 3.3...24VDC +/- 5.5%, Pmax=800mW, short-circuit-proof, supply for external devices, SELV	D16E [...]													
	alternatively: input auxiliary power supply for parameterization via RS485/MODBUS RTU without line voltage	15...50VDC														

◦ configurable option

For further information and additional functions see EC Control Software, Fan-Set-App, or MODBUS Parameter Specification V6.0



Curves: Air performance 50 Hz

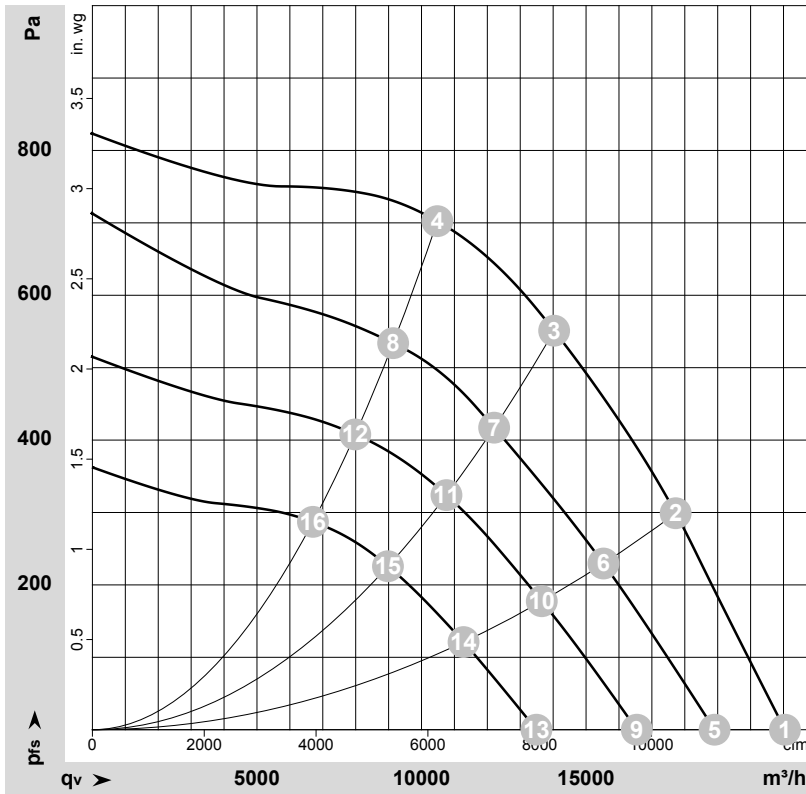

$$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$$

Measurement: LU-192423-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	Wired	U	f	n	P _{ed}	I	LpA _{in}	LwA _{in}	LwA _{out}	q _v	p _{fs}	q _v	p _{fs}
		V	Hz	min ⁻¹	W	A	dB(A)	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	3~	400	50	1370	1935	3.03	79	87	89	21045	0	12385	0.00
2	3~	400	50	1370	2725	4.20	75	83	86	17725	300	10430	1.20
3	3~	400	50	1370	3300	5.10	71	79	84	14030	550	8260	2.21
4	3~	400	50	1370	3119	4.78	70	79	83	10480	700	6170	2.81
5	3~	400	50	1265	1486	2.38	78	85	87	18905	0	11125	0.00
6	3~	400	50	1220	1900	2.98	74	81	83	15530	230	9140	0.92
7	3~	400	50	1195	2121	3.31	67	75	80	12205	418	7185	1.68
8	3~	400	50	1205	2075	3.24	66	75	79	9140	534	5380	2.14
9	3~	400	50	1100	977	1.66	75	85	85	16540	0	9735	0.00
10	3~	400	50	1070	1275	2.08	71	77	80	13655	178	8035	0.71
11	3~	400	50	1050	1440	2.32	64	72	77	10760	325	6330	1.30
12	3~	400	50	1055	1410	2.27	63	71	75	7985	408	4700	1.64
13	3~	400	50	915	579	1.14	74	77	80	13495	0	7940	0.00
14	3~	400	50	895	765	1.38	66	74	77	11275	121	6635	0.49
15	3~	400	50	885	873	1.52	61	69	73	8980	226	5285	0.91
16	3~	400	50	885	852	1.49	59	67	71	6700	287	3945	1.15

Wired = Wiring · U = Voltage · f = Frequency · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side
LwA_{out} = Sound power level outlet side · q_v = Air flow · p_{fs} = Pressure increase