



The engineer's choice

ebmpapst

RG160-28/56S

INDEX

1	General	3
2	Mechanics	3
2.1	GENERAL	3
2.2	CONNECTIONS	4
3	Operating Data.....	5
3.1	ELECTRICAL OPERATING DATA	5
3.2	OPERATING DATA - ELECTRICAL INTERFACE -OUTPUT	6
3.3	ELECTRICAL FEATURES	6
3.4	AERODYNAMIC	6
3.5	SOUND DATA	8
4	Environment.....	8
4.1	GENERAL.....	8
4.2	CLIMATIC REQUIREMENTS*)	8
5	Safety.....	9
5.1	ELECTRICAL SAFETY	9
5.2	APPROVAL TESTS	9
6	Reliability.....	9
6.1	GENERAL.....	9

1 General


Fan type	Blower
Rotational direction looking at rotor	counterclockwise
Airflow direction	Air in axially, Air out radially
Bearing system	Ball bearing
Mounting position	any
Balancing grade	6,3

2 Mechanics**2.1 General**

Width	220,0 mm	
Height	220,0 mm	
Depth	56,0 mm	
Diameter	0,0 mm	
Weight	1,700 kg	
Housing material	Plastic	
Impeller material	Mixed	
Max. torque when mounted across both mounting flanges; Metal flange on mounting plate	wire outlet corner: 70 Ncm remaining corners: 70 Ncm	
Screw size	ISO 4762 - M4 degreased, without an additional brace and without washer	

2.2 Connections

Electrical connection	Wires	
Length of lead wire	325,0 mm	
Tolerance	+/- 10,0 mm	
Length of tube	285,0 mm	
Tolerance	+/- 10,0 mm	
Wire gauge (AWG)	18	
Insulation diameter	1,65 mm	

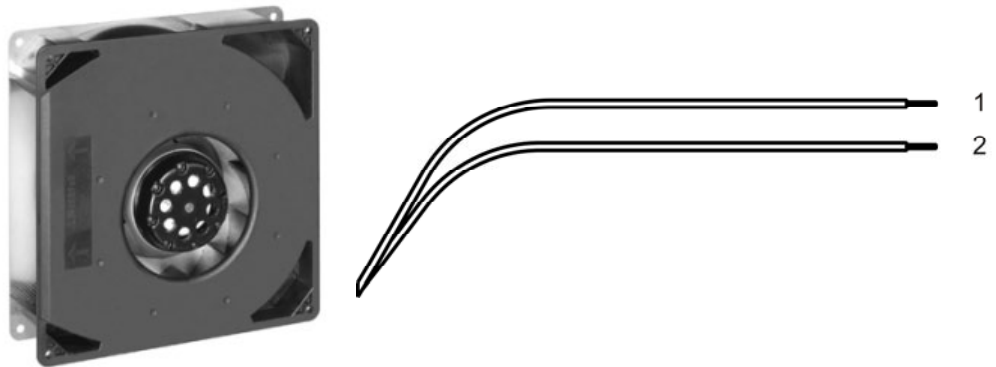

	Colour	Operation
Wire 1	blue	L
Wire 2	blue	N

3 Operating Data

3.1 Electrical Operating Data

Measurement conditions: Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C; Motor axis horizontal; warm-up time before measuring 5 minutes (unless otherwise specified).
In the intake and outlet area should not be any solid obstruction within 0,5 m.

$\Delta p = 0$: corresp. to free air flow (see section 3.4)

I: corresp. to RMS line current


Features	Condition	Symbol	Values	
Frequency	$\Delta p = 0$	f	50 Hz	60 Hz
Nominal voltage	$\Delta p = 0$	U_N	230,0 V	230,0 V
Tolerance			+ 6,0 % - 10,0 %	+ 6,0 % - 10,0 %
Power consumption	$\Delta p = 0$	P	47,0 W	50,0 W
Tolerance			+ 5,0 % - 10,0 %	+ 5,0 % - 10,0 %
Speed	$\Delta p = 0$	n	2.750 1/min	3.050 1/min
Tolerance			+/- 3,0 %	+/- 3,0 %

3.2 Operating Data - Electrical Interface -Output

Tacho type	None
------------	------

3.3 Electrical Features

Locked rotor protection	Thermal circuit breaker
Locked rotor current at U_n	

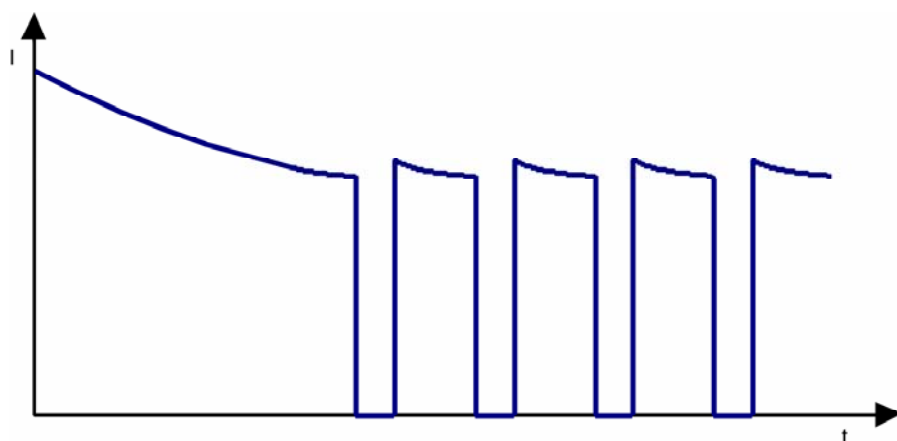

3.4 Aerodynamic

Measurement conditions: Measured with a double chamber intake rig acc. to DIN EN ISO 5801.
Normal air density = 1,2 kg/m³; Temperature 23°C +/- 3°C;
In the intake and outlet area should not be any solid obstruction within 0,5 m.

a.) Operation condition:

2.750 1/min at free air flow

Frequency: 50 Hz


Max. free-air flow ($\Delta p = 0$ / $\dot{V} = \max.$)	188,0 m ³ /h
Max. static pressure ($\Delta p = \max.$ / $\dot{V} = 0$)	335 Pa

b.) Operation condition:

3.050 1/min at free air flow

Frequency: 60 Hz

Max. free-air flow ($\Delta p = 0$ / $\dot{V} = \max.$)	206,0 m ³ /h
Max. static pressure ($\Delta p = \max.$ / $\dot{V} = 0$)	465 Pa

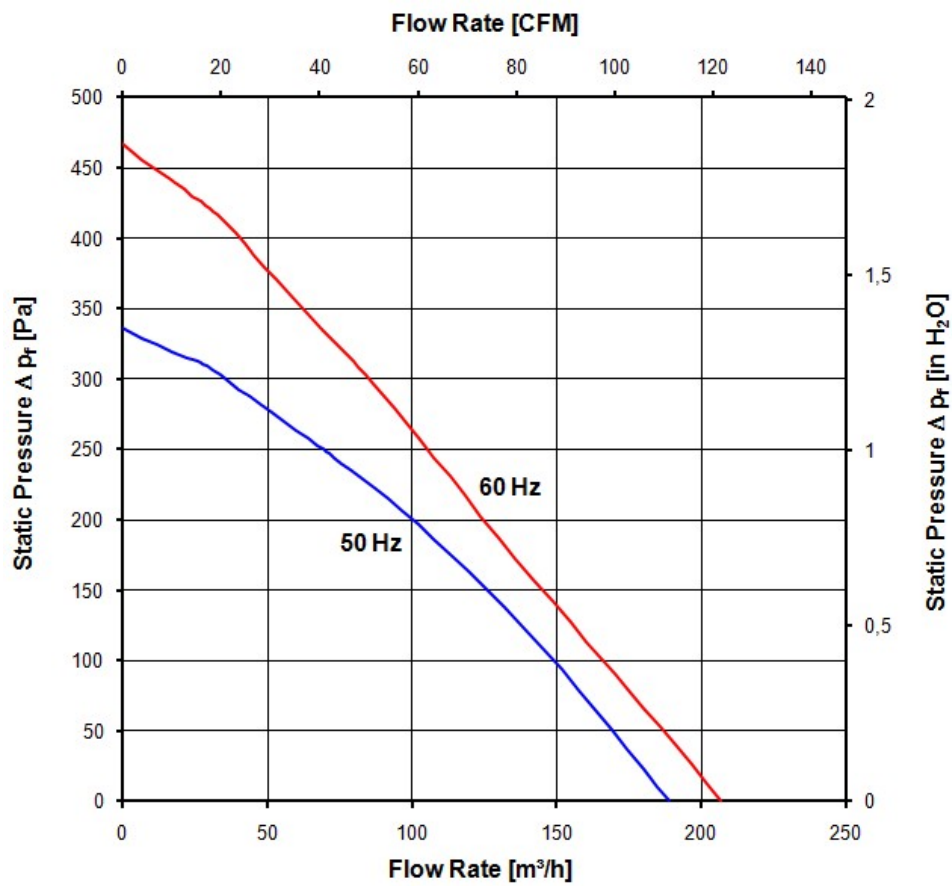

3.5 Sound Data

Measurement conditions: Sound pressure level: 1 Meter distance between microphone and the air intake.
 Sound power level: Acc. to DIN 45635 part 38 (ISO 10302)
 Measured in a semianchoic chamber with a background noise level of $L_p(A) < 5 \text{ dB(A)}$
 For further measurement conditions see section 3.4

a.) Operation condition:

2.750 1/min at free air flow

Frequency: 50 Hz

Optimal operating point	65,0 m ³ /h @ 230 Pa	
Sound power level at the optimal operating point	6,5 bel(A)	
Sound pressure level at free air flow, measured in rubber bands		

b.) Operation condition:

3.050 1/min at free air flow

Frequency: 60 Hz

Optimal operating point	74,0 m ³ /h @ 287 Pa	
Sound power level at the optimal operating point	6,9 bel(A)	
Sound pressure level at free air flow, measured in rubber bands		

4 Environment

4.1 General

Min. permitted ambient temperature TU min.	-30 °C / 50 Hz -30 °C / 60 Hz	
Max. permitted ambient temperature TU max.	70 °C / 50 Hz 80 °C / 60 Hz	
Min. permitted storage temperature TL min.	-40 °C	
Max. permitted storage temperature TL max.	80 °C	

4.2 Climatic requirements*)

Humidity requirements	humid heat, constant; according to DIN EN 60068-2-78, 14 days	
Water exposure	None	
Radiation exposure	None	
Dust requirements	None	
Salt fog requirements	None	
Harmful gas requirements	None	

*) Permitted application area:

The product is intended for use in sheltered rooms with controlled temperature and controlled humidity. Directly exposure to water must be avoided.

Pollution degree 1 (according DIN EN 60664-1)

There is either no pollution or it occurs only dry, non-conductive pollution. The pollution has no negative impact.

5 Safety

5.1 Electrical Safety

Dielectric strength DIN EN 60950 (VDE 0805) and DIN EN 60335 (VDE 0700) A.) Type test Measuring conditions: After 48h of storage at 95% R.H. and 25°C. No arcing or breakdown is allowed! All connections together to ground. B.) Routine test Measuring conditions: At indoor climate. No arcing or breakdown is allowed! All connections together to ground.	1500 VAC / 1 Min. 1500 VAC / 1 Sec.
Isolation resistance Measuring conditions: After 48h of storage at 95% R.H. and 25°C measured with U=500 VDC for 1 min.	RI > 50 MOhm
Air and leakage distances	2,0 mm / 1,8 mm
Protection class	I

5.2 Approval Tests

CE	Yes
UL	Yes / UL507, Electric Fans
VDE	Yes / Approval acc. to EN 60950 (VDE 0805) - Information technology equipment
CSA	Yes / C22.2 No. 113 Fans and Ventilators
CCC	Yes / GB 12350 Safety Requirements for small Power Motors

The approval tests are observed to:


U approval max.: 230 V / f: 60 Hz @ TU approval max.: 80 °C

6 Reliability

6.1 General

Life expectancy L10 at TU = 40 °C	30.000 h / 50 Hz 27.500 h / 60 Hz	
Life expectancy L10 at TU max.	15.000 h / 50 Hz 12.500 h / 60 Hz	

Schutzvermerk nach DIN ISO 16016 beachten!
Refer to protection notice DIN ISO 16016

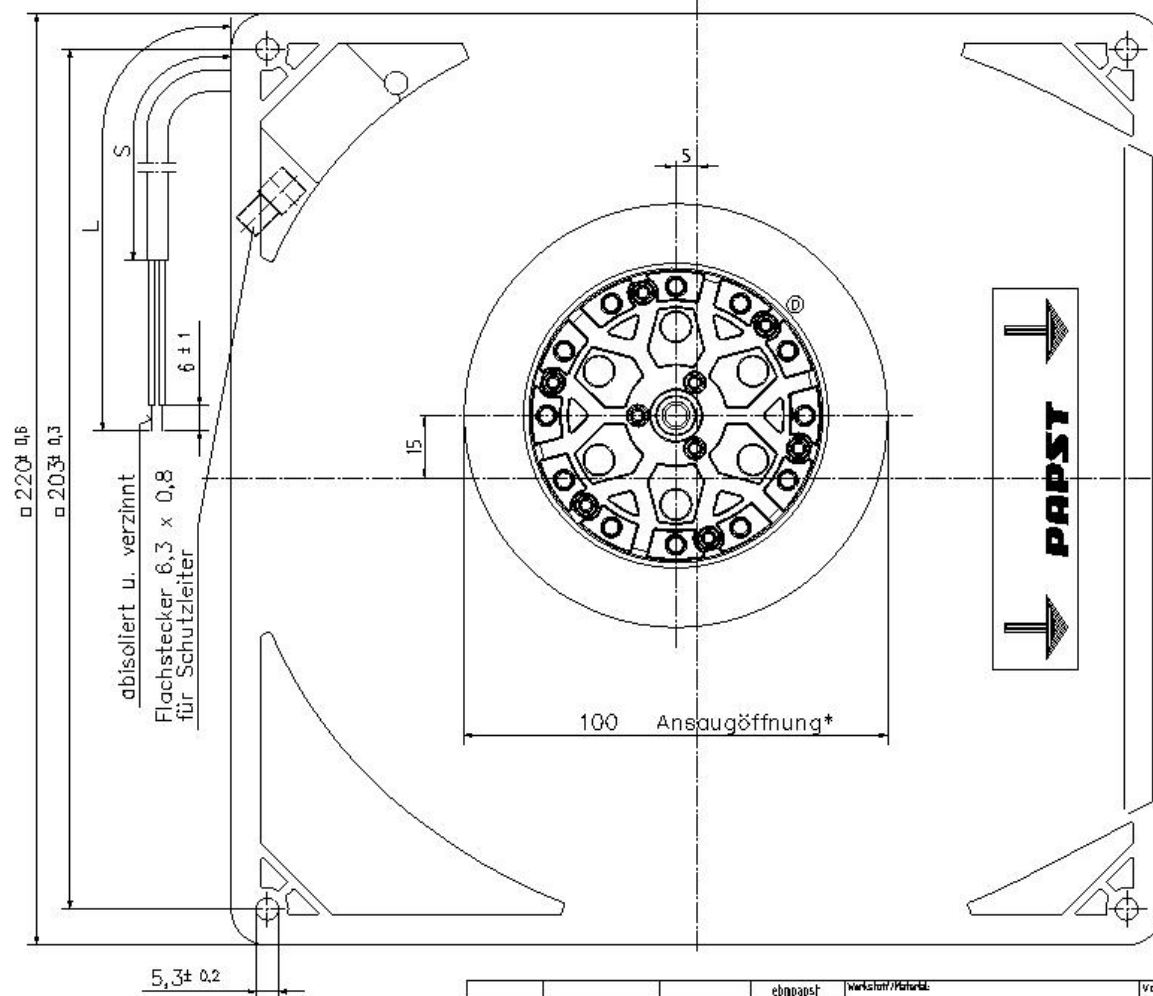

Axialspiel: mit Feder spielfrei verspannt
* Öffnung f. Montagewahl

		ebm papst		Werkstoff/Material:		Volumen/Volume (mm³)	
SW-Stift/Stift	Art-Nr./Change-Nr.	Art-Nr./System-Name	CO ₂ -Umgebung/ CO ₂ -Environment			Gewicht/Mass (g):	
		Einbaufahrte Name/Name	Artikel/Title				
Tiefenring/T-derivate:		Bohr-/ Druck					
		Bohr-/ Druck-Ed					
Allgemeinbezeichnungen / Einbaubereiche		Druck/ Tiefen					
		ebm papst		Zug-/WZ / Drawing-/WZ		ErstZug-/Replaces	
ebm papst St. Georgen GmbH & Co. KG		Bauteiltyp/Type of Element		Feldnummer/Field-Num	Index-Nr.	Formel/Size	Maßstab/Scale