

Beijing Hengrui Mechanical and Electrical Equipment Co.,Ltd  
 Phone +86 10-62547612  
 zhangyu@bjhengrui.cn  
 en.bjhengrui.com



### Nominal data

|                             |                   |      |      |
|-----------------------------|-------------------|------|------|
| Type                        | W6D910-GE01-01    |      |      |
| Motor                       | M6D138-LA         |      |      |
| Phase                       |                   | 3~   | 3~   |
| Nominal voltage             | VAC               | 400  | 400  |
| Wiring                      |                   | Δ    | Y    |
| Frequency                   | Hz                | 50   | 50   |
| Method of obtaining data    |                   | ml   | ml   |
| Valid for approval/standard |                   | CE   | CE   |
| Speed                       | min <sup>-1</sup> | 890  | 670  |
| Power consumption           | W                 | 1840 | 1150 |
| Current draw                | A                 | 3.83 | 2.22 |
| Max. back pressure          | Pa                | 145  | 82   |
| Min. ambient temperature    | °C                | -40  | -40  |
| Max. ambient temperature    | °C                | 60   | 60   |
| Starting current            | A                 | 13   | 4.3  |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · oe = Customer equipment  
 Subject to change

### Data according to ErP Directive

|                                   |   | Actual | Req. 2015 |
|-----------------------------------|---|--------|-----------|
| 01 Overall efficiency $\eta_{es}$ | % | 37     | 35.3      |
| 02 Measurement category           |   | A      |           |
| 03 Efficiency category            |   | Static |           |
| 04 Efficiency grade N             |   | 41.7   | 40        |
| 05 Variable speed drive           |   | No     |           |

Data obtained at optimum efficiency level.  
 The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

|                               |                   |       |
|-------------------------------|-------------------|-------|
| 09 Power consumption $P_e$    | kW                | 1.79  |
| 09 Air flow $q_v$             | m <sup>3</sup> /h | 17950 |
| 09 Pressure increase $p_{fs}$ | Pa                | 134   |
| 10 Speed n                    | min <sup>-1</sup> | 895   |
| 11 Specific ratio*            |                   | 1.00  |

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$


LU-120968



## Technical description


|                                                                            |                                                        |
|----------------------------------------------------------------------------|--------------------------------------------------------|
| Weight                                                                     | 49.6 kg                                                |
| Fan size                                                                   | 910 mm                                                 |
| Rotor surface                                                              | Cast in aluminum                                       |
| Terminal box material                                                      | PP plastic                                             |
| Blade material                                                             | Sheet aluminum insert, sprayed with PP plastic         |
| Number of blades                                                           | 5                                                      |
| Blade pitch                                                                | -5°                                                    |
| Airflow direction                                                          | "V"                                                    |
| Direction of rotation                                                      | Clockwise, viewed toward rotor                         |
| Degree of protection                                                       | IP54                                                   |
| Insulation class                                                           | "F"                                                    |
| Moisture (F) / Environmental (H) protection class                          | F3-1                                                   |
| Max. permitted ambient temp. for motor (transport/storage)                 | +80 °C                                                 |
| Min. permitted ambient temp. for motor (transport/storage)                 | -40 °C                                                 |
| Installation position                                                      | Any                                                    |
| Condensation drainage holes                                                | On rotor and stator sides                              |
| Mode                                                                       | S1                                                     |
| Motor bearing                                                              | Ball bearing                                           |
| Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system) | <= 3.5 mA                                              |
| Electrical hookup                                                          | Via terminal box                                       |
| Motor protection                                                           | Thermal overload protector (TOP) with basic insulation |
| With cable                                                                 | Axial                                                  |
| Protection class                                                           | I (with customer connection of protective earth)       |
| Conformity with standards                                                  | EN 61800-5-1; EN 60034-1 (2010); CE                    |
| Approval                                                                   | EAC; VDE                                               |

## Product drawing

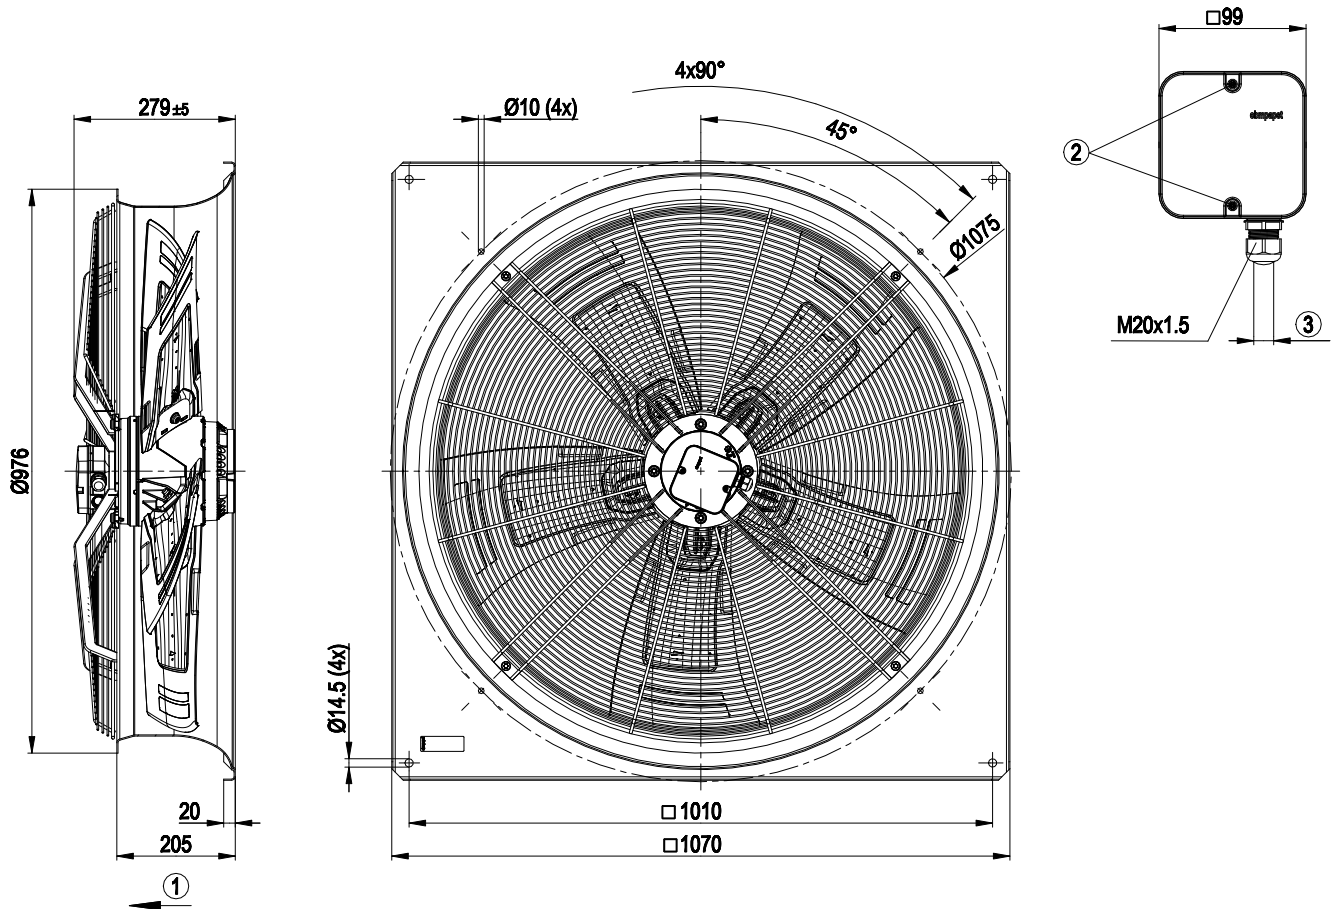

|   |                                                                            |
|---|----------------------------------------------------------------------------|
| 1 | Direction of air flow "V"                                                  |
| 2 | Tightening torque $1.5 \pm 0.2$ Nm                                         |
| 3 | Cable diameter: min. 7 mm, max. 14 mm; tightening torque $2.0 \pm 0.30$ Nm |


Connection diagram

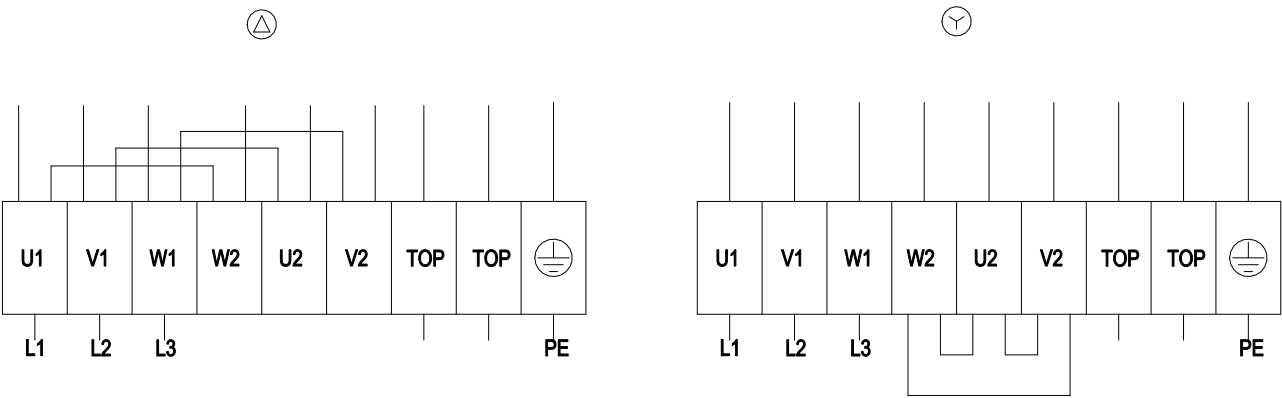

|    |                  |    |                 |     |              |
|----|------------------|----|-----------------|-----|--------------|
| Δ  | Delta connection | Y  | Star connection | L1  | = U1 = black |
| L2 | = V1 = blue      | L3 | = W1 = brown    | W2  | yellow       |
| U2 | green            | V2 | white           | TOP | 2x gray      |
| PE | green/yellow     |    |                 |     |              |



Curves: Air performance 50 Hz

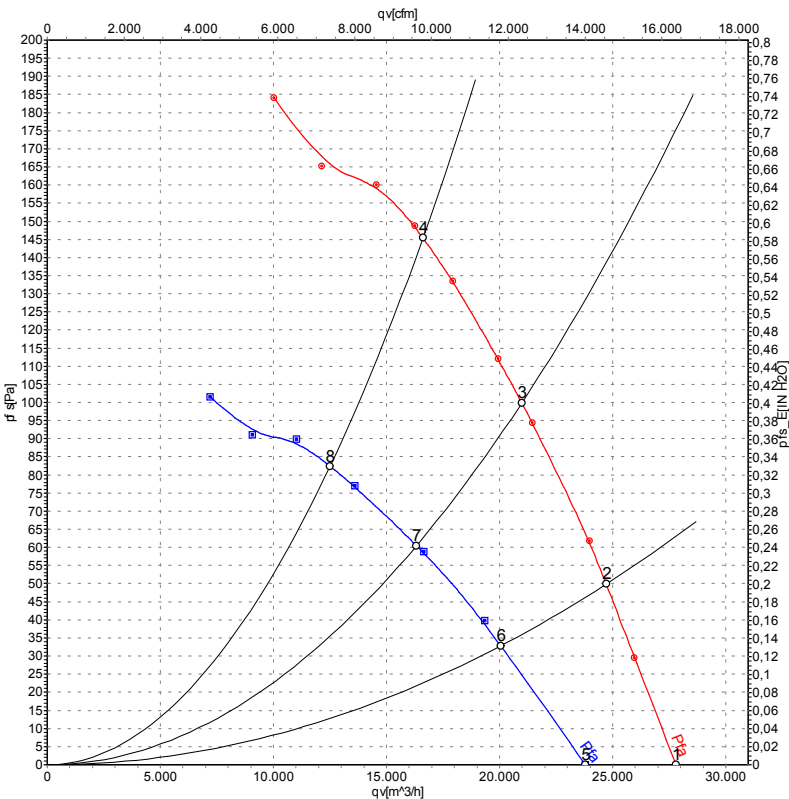

Measurement: LU-120968-1  
Measurement: LU-120972-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

|   | Wired | U   | f  | n                 | P <sub>e</sub> | I    | LpA <sub>in</sub> | LwA <sub>in</sub> | LwA <sub>out</sub> | qv                | p <sub>fs</sub> |
|---|-------|-----|----|-------------------|----------------|------|-------------------|-------------------|--------------------|-------------------|-----------------|
|   |       | V   | Hz | min <sup>-1</sup> | W              | A    | dB(A)             | dB(A)             | dB(A)              | m <sup>3</sup> /h | Pa              |
| 1 | Δ     | 400 | 50 | 935               | 1199           | 2.99 | 71                | 78                | 78                 | 27800             | 0               |
| 2 | Δ     | 400 | 50 | 920               | 1437           | 3.26 | 68                | 76                | 76                 | 24720             | 50              |
| 3 | Δ     | 400 | 50 | 905               | 1663           | 3.57 | 68                | 75                | 75                 | 20990             | 100             |
| 4 | Δ     | 400 | 50 | 890               | 1840           | 3.83 | 71                | 79                | 78                 | 16620             | 145             |
| 5 | Y     | 400 | 50 | 800               | 882            | 1.68 | 67                | 74                | 74                 | 23800             | 0               |
| 6 | Y     | 400 | 50 | 750               | 1012           | 1.93 | 63                | 71                | 70                 | 20050             | 34              |
| 7 | Y     | 400 | 50 | 705               | 1097           | 2.11 | 61                | 69                | 68                 | 16330             | 61              |
| 8 | Y     | 400 | 50 | 670               | 1150           | 2.22 | 66                | 73                | 73                 | 12510             | 82              |

Wired = Wiring · U = Power supply · f = Frequency · n = Speed · P<sub>e</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
LwA<sub>out</sub> = Sound power level outlet side · qv = Air flow · p<sub>fs</sub> = Pressure increase